

# Appendix C:

## Hydrologic and Hydraulic Analyses

# Green and Barren Rivers Locks and Dams - Disposition Study

## HYDROLOGY AND HYDRAULICS APPENDIX C

### TABLE OF CONTENTS

Item	Page
History	1
General Study Purpose	1
Basin Characteristics	2
Historic Floods	3
Projects Affecting the Study Area	4
Gaged Flow Data	4
Climatic Data	15
Recorded Temperature Data	15
Recorded Precipitation Data	16
Hydrologic and Hydraulic Analysis	16
Development of Flood Frequency Discharges	16
Surveyed X-sections and Mapping	17
Hydraulic Analyses	17
Discharge / Elevation Duration	18
Elevation Hydrographs	20
Nolin River Lake Tailwater	20

### LIST OF TABLES

Number	Title	Page
1	Green River Basin Drainage Areas	3
2	Annual Peaks - Discharge and Stage	5-14
3	Discharge Duration	18-19
4	Green River at Mammoth Cave – Mile 197 Elevation Duration Data	19

## LIST OF PLATES

Number	Title
1-3	Historic Highwater Profiles - Green River
4	- Barren River
5	- Nolin River
	Discharge and Stage Frequency Curves - Natural and Modified
6-7	- Green River at Munfordville, Ky.
8-9	- Nolin River at Kyrock, Ky.
10-11	- Green River at Brownsville, Lock and Dam 6, Ky.
12-13	- Barren River at Bowling Green, Ky.
14-15	- Green River at Woodbury, Lock and Dam 4, Ky.
16-17	- Green River at Paradise, Ky.
18-19	- Rough River at Falls of Rough, Ky.
20-21	- Green River at Calhoun, Lock and Dam 2, Ky.
22	Frequency Profiles - Green River and Barren River - Existing Condition
23	Discharge Duration Profiles - Green River - Design Conditions
24	- Green River - Existing Conditions
25	- Green River - Dam 6 Removed
26	- Green River - Dam 5 and 6 Removed
27	- Green River - Dam 3, 5 and 6 Removed
28	- Barren River - Design Conditions
29	- Barren River - Existing Conditions
30	- Barren River - Dam 1 Removed
31	Rating Curve - Green River at Brownsville, Lock and Dam 6,
32	- Green River at Mile 197, Mammoth Cave area
33	- Nolin River at Kyrock
34	Elevation Duration Curve - Green River at Brownsville, Lock and Dam 6
35	- Green River at Mile 197, Mammoth Cave area
36	- Nolin River at Kyrock
37	Discharge Duration Curve - Green River at Munfordville
38	- Nolin River at Kyrock
39	- Green River at Brownsville, Lock and Dam 6
40	- Barren River at Bowling Green
41	- Green River at Woodbury, Lock and Dam 4
42	- Green River at Calhoun, Lock and Dam 2
43-48	Elevation Hydrographs - Green River at Brownsville, Lock and Dam 6
49-55	- Nolin River at Kyrock

# Green and Barren Rivers Locks and Dams - Disposition Study

## HYDROLOGY AND HYDRAULICS APPENDIX C

### History

The Barren River, a tributary of the Green River, and the Green River, a tributary of the Ohio River, have been used for commercial navigation purposes since the mid 1700's. The first structural improvements to aid navigation were constructed in the 1830's with additional improvements built periodically since that time. Green River Lock and Dam 6 and Barren River Lock and Dam 1, were the most upstream in a series of navigation structures constructed from the mouth of Green River. Each project was constructed to maintain a minimum six foot navigation channel.

- Green River Lock and Dam 1 - Original construction 1835-1840, new lock placed in operation June 18, 1956
- Green River Lock and Dam 2 - Old lock and dam rebuilt 1893-1895, new lock placed in operation May 25, 1956
- Green River Lock and Dam 3 - Original construction 1833-1836
- Green River Lock and Dam 4 - Original construction 1834-1839, dam was breached May 24, 1965 and closed to traffic
- Green River Lock and Dam 5 - Old lock placed in operation January 17, 1900, new lock placed in operation December 22, 1934, deactivated August 31, 1951
- Green River Lock and Dam 6 - Original construction 1904-1905, deactivated August 31, 1951
- Barren River Lock and Dam 1 - Original construction 1841, new lock placed in operation September 17, 1934, closed to navigation with breach of Green River Lock and Dam 4

### General Study Purpose

This report was prepared by the Louisville District, Corps of Engineers (COE) under the authority of Section 216 of the Flood Control Act of 1970. The intent of this analysis was to identify low flow duration and a range of frequency water surface elevations for existing conditions, with Green River Dams 3 through 6 and Barren River Dam 1 removed and various combinations of leave-in-place and removal alternatives.

Portions of the Green River valley subject to flooding by the Green and Barren Rivers are addressed in this appendix. The properties in the Green River and Barren River floodplain, although largely undeveloped at present, are inundated almost annually by floodwaters. These open areas are coming under increasing development pressures as the growth in the Green River valley progresses. However, usage during low flow periods, thereby lower water surface elevations, are also addressed in this appendix and may be more germane to this study.

## Basin Characteristics

The headwaters of the Green River begin in central Kentucky in Lincoln County and generally flow westward for 370 miles to its confluence with the Ohio River at river mile 784. In the headwater area, the stream slope is about four feet per mile and drops to a gradient of about 0.25 feet per mile in the extreme lower reaches of the stream. The overall average stream slope is about two feet per mile.

Major tributaries of the Green River include Rough, Barren, and Nolin Rivers, all located in the south central portion of the state. The total drainage area of the Green River basin is 9,230 square miles.

The headwaters of the Barren River begin in north central Tennessee and generally flow northwestward for approximately 140 miles to its confluence with Green River at river mile 149.5. In the headwater area, the stream slope is about three feet per mile and drops to a gradient of about one foot per mile in the extreme lower reaches of the stream. The overall average stream slope is about 1.6 feet per mile.

Pertinent drainage areas within the study limits are shown in Table 1. A significant amount of karst topography lies within the Green River drainage basin and does not contribute directly to surface runoff.

TABLE 1

**GREEN RIVER BASIN DRAINAGE AREAS**

<b><u>STREAM AND LOCATION</u></b>	<b><u>MILES ABOVE MOUTH</u></b>	<b><u>DRAINAGE AREA</u></b> <b><u>(Square Miles)</u></b>	
Green River at Green River Lake	305.7	682	(0.6)
Green River at Munfordsville	225.9	1,673	(176)
Green River at Mammoth Cave	197.2	1,983	(444)
Green River above Nolin River	183.5	2,031	(463)
Nolin River at Nolin River Lake	7.8	703	(223)
Nolin River at Kyrock	7.4	707	(223)
Nolin River at mouth	0.0	727	(223)
Green River including Nolin River	183.5	2,758	(686)
Green River at Brownsville at Lock and Dam 6	181.7	2,762	(687)
Green River at Naker / Glenmore at Lock and Dam 5	168.1	3,001	(697)
Green River above Barren River	149.5	3,140	(703)
Barren river at Barren River Lake	79.2	942	(77)
Barren River at Bowling Green	37.6	1,849	(487)
Barren River at Greencastle at Lock and Dam 1	15.0	1,968	(568)
Barren River at mouth	0.0	2,264	(656)
Green River including Barren River	149.5	5,404	(1,359)
Green River at Woodbury at Lock and Dam 4	149.1	5,404	(1,359)
Green River at Rochester at Lock and Dam 3	108.5	6,142	(1,380)
Green River above Rough River	71.3	6,431	(1,401)
Rough River at Rough River Lake	89.4	454	(107)
Rough River at mouth	0.0	1,081	(134)
Green River including Rough River	71.3	7,512	(1,534)
Green River at Calhoun at Lock and Dam 2	63.3	7,566	(1,534)
Green River including Pond River	55.1	8,423	(1,568)
Green River at Spottsville at Lock and Dam 1	9.1	9,183	(1,576)
Green River at mouth	0.0	9,230	(1,576)

( ) non-contributing drainage area - karst topography

**Historic Floods**

Generally, the Green River basin flood season extends from early winter through late spring. High water occurs almost annually in the Green River basin and in many years multiple flood events have been observed. Highwater marks were set for a number of floods since 1913 with the January 1937 and the March 1962 events being major floods in the study reach. Plates 1 through 3 show selected Green River highwater profiles of a number of floods in the basin. Plate 4 presents selected Barren River highwater profiles and Plate 5 presents selected Nolin River highwater profiles. (It should be noted that the highwater profiles were last revised in 1972).

### Projects Affecting the Study Area

A system of flood control reservoirs were constructed by the U.S. Army Corps of Engineers on the Green River and three of its main tributaries to reduce flood damage in the basin. These projects, the drainage area they control and the date they were put into operation are as follows:

Rough River Lake, 454 square miles, (December 1960)

Nolin River Lake, 703 square miles, (March 1963)

Barren River Lake, 942 square miles, (May 1964)

Green River Lake, 682 square miles, (February 1969)

It is estimated that Nolin and Green River Lakes would combine to reduce a flood equal to that of January 1937 by about 9 feet at Lock 6, Brownsville, Kentucky, and all four Corps projects would combine for an estimated 2.3 foot reduction at Lock 2, Calhoun, Kentucky. Significant flood reductions will dissipate downstream of Lock 2 at a point where the contributing influence of the Ohio River backwater dominates.

### Gaged Flow Data

Numerous U.S. Geological Survey (USGS) gaging stations have been maintained in the study reach of the Green and Barren Rivers. The USGS gaging stations records provided stage and discharge data. Flood peak data were extracted from the period of record for each gaging station and were the basis for computing the percent chance exceedence flood events presented in this report. Table 2 lists the period of record observed annual peaks for the available gaging stations. These data are actual recorded peak values and not homogeneous as they contain both natural and modified (pre and post Green, Nolin, Barren and Rough River Lakes) values. Funding to keep gaging stations in operation is limited and is reflected in discontinuance at several sites.



**TABLE 2 (Continued)**

**GREEN RIVER AT MUNFORDVILLE, KY. (Continued)**

Drainage Area = 1,673 sq. mi.			Gage Datum = 451.70 (NGVD)		
<u>Date</u>	<u>Discharge in CFS</u>	<u>Stage in Feet</u>	<u>Date</u>	<u>Discharge in CFS</u>	<u>Stage in Feet</u>
4/17/98	22400	28.5	12/1/04	20300	25.27
1/10/99	23200	29.16	9/24/06	21500	27.68
3/21/00	18700	25.01	1/8/07	15500	21.50
12/17/00	17300	23.45	4/5/08	24800	30.50
3/21/02	22200	28.29	1/29/09	27200	32.65
2/17/03	27700	32.99	5/4/10	56900	51.88
2/7/04	22600	28.66	4/13/11	29700	34.68

*Green River Lake placed in operation beginning February 1969*

**GREEN RIVER AT MAMMOTH CAVE, KY.**

Drainage Area = 1,983 sq. mi.			Gage Datum = 420.52 (NGVD)		
<u>Date</u>	<u>Discharge in CFS</u>	<u>Stage in Feet</u>	<u>Date</u>	<u>Discharge in CFS</u>	<u>Stage in Feet</u>
1913	----	50.5	1/2/43	41,700	38.1
1935	51,600	42.6	4/14/44	21,600	24.5
3/28/36	23,400	26.5	1/4/45	35,700	34.6
1/24/37	75,000	52.0	2/16/46	20,200	23.4
3/7/38	15,300	19.8	5/23/47	20,100	23.3
2/6/39	29,800	31.7	4/16/48	45,200	40.1
4/4/40	20,000	23.5	2/18/49	51,400	43.0
7/21/41	15,200	19.2	1/9/50	49,200	42.0
4/12/42	21,300	24.3		Discontinued	

*Green River Lake placed in operation beginning February 1969*

**TABLE 2 (Continued)**

**NOLIN RIVER AT KYROCK, KY.**

Drainage Area = 703 sq. mi.

Gage Datum = 400.0(NGVD)

<u>Date</u>	<u>Discharge in CFS</u>	<u>Stage in Feet</u>	<u>Date</u>	<u>Discharge in CFS</u>	<u>Stage in Feet</u>
4/27/31	3,390		3/6/77	5,680	
1/30/32	22,700		12/27/77	7,860	
3/3/40	10,500		12/26/78	11,200	
7/19/41	4,540		10/18/79	7,160	
4/9/42	7,360		5/26/81	4,380	
3/20/43	8,800		9/9/82	7,180	
4/11/44	6,820		5/27/83	10,300	
3/1/45	10,600		5/21/84	8,480	
2/15/46	8,850		1/21/85	10,000	
1/2/47	8,940		12/2/85	4,650	
2/13/48	14,700		12/12/86	4,950	
2/17/49	11,700		1/8/88	4,970	
12/13/49	13,600		3/17/89	10,100	
5/9/61	12,600	43.95	2/27/90	8,710	
2/27/62	12,600	59.27	1/26/91	7660	37.23
3/23/63	9,120	38.27	7/8/92	5,860	34.82
3/26/64	9,620	40.06	2/27/93	5,020	33.89
12/1/64	13,100	42.70	3/5/94	6030	42.93
2/25/66	5,640	32.91	6/1/95	7290	43.05
5/23/67	6,980	39.17	6/18/96	4260	32.37
6/5/68	5,520	41.19	3/27/97	6910	49.52
2/5/69	4,790	33.70	1/13/98	4010	32.22
5/7/70	8,220	39.58	2/5/99	4230	29.21
3/24/71	9,540	38.37	2/26/00	3660	29.05
3/13/72	9,990	41.40	2/22/01	5440	28.87
7/24/73	6,200	36.60	5/1/02	5480	29.05
12/6/73	10,100		5/12/03	6200	34.94
4/7/75	8,420		6/9/04	7560	37.2
3/3/76	6,790				

Discontinued

*Nolin River Lake placed in operation beginning March 1963*

**TABLE 2 (Continued)**

**GREEN RIVER AT LOCK 6, BROWNSVILLE, KY.**

Drainage Area = 2,762 sq. mi.			Gage Datum = 413.03 (NGVD)		
<u>Date</u>	<u>Discharge in CFS</u>	<u>Stage in Feet</u>	<u>Date</u>	<u>Discharge in CFS</u>	<u>Stage in Feet</u>
1/20/07	34,000	25.3	1/9/50	55,900	33.40
2/16/08	28,000	20.0	3/25/52	66,900	37.15
2/26/09	45,900	31.2	5/20/53	32,500	22.85
6/13/10	31,000	22.0	4/19/54	20,400	16.57
5/2/11	49,400	32.6	3/26/55	38,100	27.82
4/4/12	34,800	26.0	2/3/56	44,000	30.10
1/10/13	103,000	42.8	2/2/57	38,000	27.52
5/7/14	30,600	21.8	11/21/57	55,300	34.15
2/3/15	33,200	24.4	1/24/59	33,700	23.48
12/19/15	51,300	33.0	1/16/60	19,000	16.05
1/7/17	38,600	27.1	3/8/61	32,900	23.07
1/31/18	29,800	21.1	3/2/62	90,200	41.85
1/4/19	61,000	35.6	3/8/63	27,200	19.84
1/11/20	52,900	33.2	3/12/64	46,300	30.6
4/2/21	19,100	16.1	3/31/65	32,700	22.96
2/23/22	33,200	23.6	2/14/66	18,900	16.02
2/5/23	42,100	29.0	3/9/67	35,700	25.04
1/5/24	36,800	26.2	4/7/68	39,300	26.95
12/11/24	39,000	27.4	4/20/69	16,200	15.12
1/24/26	34,000	24.0	4/4/70	27,200	19.82
1/24/27	55,700	34.3	12/24/70	21,700	17.20
6/11/28	32,900	23.4	2/27/72	30,500	21.77
2/28/29	32,600	23.1	12/11/72	30,200	22.63
2/6/30	23,200	17.6	1/13/74	48,500	31.50
3/30/31	12,000	14.2	3/15/75	53,000	33.12
2/1/32	47,700	30.8	3/31/76	26,100	20.12
1/24/33	35,900	25.6	3/14/77	20,600	17.05
3/6/34	32,900	23.1	1/27/78	25,500	19.66
1/23/35	55,000	33.7	12/11/78	70,100	37.26
4/9/36	29,300	20.8	12/15/79	26,500	20.37
1/24/37	120,000	44.94	6/9/81	26,000	20.00
3/16/38	19,400	16.20	9/4/82	24,800	19.24
2/3/39	35,600	26.10	5/19/83	37,000	26.44
4/22/40	25,100	18.48	5/9/84	73,000	
7/20/41	17,700	15.83	11/20/84	20,900	17.16
4/11/42	26,400	19.55	2/19/86	18,400	
3/22/43	45,500	29.13	3/2/87	28,800	21.81
4/13/44	25,900	19.16	1/21/88	23,000	18.32
3/8/45	39,800	26.00	2/17/89	59,500	34.03
2/16/46	28,700	20.28	2/6/90	31,100	21.92
1/5/47	25,600	18.75	2/20/91	31,100	21.96
4/16/48	47,800	30.65		Discontinued	
2/18/49	57,000	33.74			

*Green River Lake placed in operation beginning February 1969 and Nolin River Lake placed in operation beginning March 1963.*

**TABLE 2 (Continued)**

**BARREN RIVER NEAR FINNEY, KY.**

Drainage Area = 940 sq. mi.

Gage Datum = 400.00 (NGVD)

<u>Date</u>	<u>Discharge in CFS</u>	<u>Stage in Feet</u>	<u>Date</u>	<u>Discharge in CFS</u>	<u>Stage in Feet</u>
4/10/42	16,400	96.50	2/4/74	4,980	87.98
12/31/42	23,500	99.50	4/6/75	6,360	90.24
3/1/44	20,500	98.33	2/4/76	5,080	88.11
1/1/45	49,400		3/2/77	8,160	88.20
1/8/46	43,800		12/14/77	4,590	88.01
5/22/47	17,900	97.18	1/30/79	7,150	91.00
2/14/48	51,800		2/7/80	5,220	87.75
6/17/49	42,800		6/19/81	3,250	87.10
1/6/50	38,700		3/9/82	3,950	92.95
6/16/61	14,100	95.75	5/24/83	4,380	86.98
2/27/62	78,000		12/11/83	5,000	87.86
3/14/63	8,460	91.84	11/18/84	4,030	86.77
3/10/64	7,410	90.68	2/27/86	3,560	85.61
12/7/64	5,440	88.20	12/11/86	4,540	87.21
1/10/66	4,590	86.98	1/27/88	3,990	86.50
3/23/67	6,080	89.20	4/12/89	5,130	87.75
12/2/67	3,420	85.69	2/10/90	4,890	87.20
2/14/69	3,690	85.70	3/22/91	5,340	87.83
5/8/70	4,140	86.97	1/7/92	4,170	86.18
3/6/71	4,300	87.11	2/23/93	3,290	84.86
2/28/72	6,060	89.18	4/11/94	7,470	90.66
5/10/73	4,860	87.85			

Discontinued

*Barren River Lake placed in operation beginning March 1964*

**TABLE 2 (Continued)**

**BARREN RIVER AT BOWLING GREEN, KY.**

Drainage Area = 1,848 sq. mi.

Gage Datum = 409.83 (NGVD)

<u>Date</u>	<u>Discharge in CFS</u>	<u>Stage in Feet</u>	<u>Date</u>	<u>Discharge in CFS</u>	<u>Stage in Feet</u>
1/8/13		52.20	2/14/66	12,700	21.82
1937		46.00	3/7/67	22,700	29.61
8/2/38	22,500	28.80	4/5/68	29,000	33.65
2/5/39	27,600	32.00	6/24/69	59,000	41.67
4/2/40	20,600	27.37	12/30/69	23,300	29.37
7/5/41	11,900	20.40	8/4/71	11,400	20.56
4/11/42	23,000	29.10	1/29/72	19,400	26.24
3/21/43	32,300	34.70	12/10/72	19,600	29.37
3/1/44	26,100	31.10	1/11/74	29,900	29.37
1/2/45	51,100	39.40	3/13/75	62,400	29.37
1/10/46	38,800	36.30	3/30/76	22,500	28.76
5/23/47	20,000	27.01	3/5/77	18,400	25.73
2/15/48	53,000	39.82	12/6/77	17,500	25.50
6/18/49	35,000	35.10	12/9/78	48,900	39.47
1/7/50	51,600	39.65	12/14/79	19,400	26.57
2/14/51	21,800	28.52	6/7/81	21,400	27.76
3/24/52	77,400	44.63	2/10/82	14,000	23.69
5/20/53	19,500	26.93	5/20/83	42,000	37.04
4/19/54	19,200	26.50	5/8/84	41,400	37.15
3/23/55	55,100	40.46	11/19/84	16,300	24.38
2/19/56	38,000	36.73	2/18/86		20.91
1/30/57	66,100	42.07	3/1/87	20,400	28.12
11/20/57	30,700	34.32	1/20/88	17,600	26.14
1/23/59	21,300	28.06	2/22/89	35,400	34.02
6/29/60	19,400	26.35	2/4/90	28,000	31.34
6/16/61	19,200	26.65	12/23/90	23,900	30.86
2/28/62	85,000	49.55	12/3/91	24,200	29.64
3/6/63	18,300	25.96	2/22/93	8,290	16.12
3/11/64	24,000	30.04	4/12/94	32,300	33.24
2/12/65	20,200	26.88		Discontinued	

*Barren River Lake placed in operation beginning March 1964*

**TABLE 2 (Continued)**

**GREEN RIVER AT LOCK 4, WOODBURY, KY.**

Drainage Area = 5,403 sq. mi.

Gage Datum = 389.17 (NGVD)

<u>Date</u>	<u>Discharge in CFS</u>	<u>Stage in Feet</u>	<u>Date</u>	<u>Discharge in CFS</u>	<u>Stage in Feet</u>
1/11/13		38.50	3/31/65	54,000	25.69
1/25/37	205,000	43.10	3/14/66	38,700	17.88
8/2/38	39,900	20.20	3/7/67	55,300	24.54
2/6/39	66,200	29.30	4/7/68	60,400	26.49
4/22/40	44,600	21.60	6/25/69	56,500	24.60
7/19/41	22,500	13.12	4/3/70	48,900	22.22
4/12/42	48,700	23.05	12/23/70	37,500	18.17
3/23/43	73,700	30.16	1/29/72	45,400	21.71
3/3/44	46,800	21.54	12/11/72	50,600	23.88
1/4/45	74,100	29.30	1/13/74	72,300	29.72
1/12/46	53,000	24.79	3/15/75	86,100	42.15
1/5/47	45,800	21.88	3/31/76	49,500	22.46
2/17/48	87,400	31.30	3/6/77	43,800	19.82
2/18/49	72,700	30.65	1/27/78	45,000	
1/8/50	84,900	33.07	12/11/78	102,000	34.07
1/17/51	58,600	27.02	12/15/79	45,300	21.19
3/26/52	106,000	34.20	6/8/81	44,800	20.71
5/21/53	51,700	24.90	1/24/82	40,900	19.00
4/19/54	34,900	19.35	5/21/83	70,700	29.62
3/25/55	72,000	31.25	5/9/84	101,000	34.15
2/21/56	65,800	30.55	11/20/84	39,000	27.74
2/1/57	77,400	30.88	2/19/86	36,000	25.68
11/21/57	80,500	31.81	3/2/87	51,700	33.38
1/24/59	48,700	23.66	1/22/88	49,500	30.25
7/1/60	36,800	19.87	2/17/89	92,300	42.95
3/9/61	52,600	25.68	2/5/90	53,400	33.72
2/2/62	161,000	37.94	12/20/90	51,900	34.66
3/7/63	41,300	21.35	12/4/91	45,600	31.20
3/11/64	69,800	30.15		Discontinued	

*Green River Lake placed in operation beginning February 1969, Nolin River Lake placed in operation beginning March 1963 and Barren River Lake placed in operation beginning March 1964.*

**TABLE 2 (Continued)**

**GREEN RIVER AT PARADISE, KY.**

Drainage Area = 6,182 sq. mi.

Gage Datum = 363.19 (NGVD)

<u>Date</u>	<u>Discharge in CFS</u>	<u>Stage in Feet</u>	<u>Date</u>	<u>Discharge in CFS</u>	<u>Stage in Feet</u>
4/22/40	42,500		4/2/76	46,000	26.16
1/27/41	20,800		3/7/77	38,200	23.86
4/14/42	45,600		1/29/78	44,000	24.96
3/25/43	63,300		12/13/78	75,700	36.01
3/4/44	40,100		12/16/79	39,700	25.94
3/7/45	63,200		6/9/81	40,100	23.62
1/13/46	46,000		12/6/91	39,700	22.81
1/7/47	40,900		3/5/93	25,500	17.02
2/20/48	60,400		3/14/94	46,800	28.14
2/23/49	72,200		5/23/95	48,800	30.15
1/14/50	89,300		3/9/96	31,600	20.86
3/11/61	52,400	31.55	3/7/97	86,300	37.63
3/5/62	107,000	40.46	6/12/98	39000	22.46
3/8/63	43,500	27.73	1/26/99	51200	26.92
3/12/64	65,400	55.67	2/19/00	29400	17.85
4/1/65	58,100	30.18	2/18/01	34200	19.62
2/15/66	38,900	24.23	3/23/02	44600	25.04
3/11/67	52,700	28.59	2/21/03	42700	
4/9/68	56,700	30.27	2/9/04	41400	22.25
6/27/69	53,400	28.11	9/1/05	40800	21.11
4/5/70	43,400	26.38	1/26/06	35600	19.85
2/24/71	41,100	25.88	1/9/07	33500	18.6
2/27/72	46,300	27.73	4/7/08	50100	27.78
12/12/72	46,200	28.30	2/1/09	47800	24.21
1/14/74	59,300	31.88	5/8/2010	61600	35.01
3/17/75	65,700	33.66	4/30/2011	54800	31.12

*Green River Lake placed in operation beginning February 1969, Nolin River Lake placed in operation beginning March 1963 and Barren River Lake placed in operation beginning March 1964.*

**TABLE 2 (Continued)**

**ROUGH RIVER AT FALLS OF ROUGH, KY.**

Drainage Area = 504 sq. mi.

Gage Datum = 420.94 (NGVD)

<u>Date</u>	<u>Discharge in CFS</u>	<u>Stage in Feet</u>	<u>Date</u>	<u>Discharge in CFS</u>	<u>Stage in Feet</u>
1/12/13		28.96	2/22/71	4,750	21.84
3/29/05		28.93	2/24/72	4,770	21.87
03/00/35		29.31	12/8/72	4,100	20.48
1/25/37		34.06	1/11/74	3,480	18.42
2/16/49	11,400	28.20	3/29/75	4,020	20.20
1/14/50	12,400	28.87	1/26/76	3,080	16.84
1/16/51	10,900	27.85	3/4/77	3,280	17.62
3/23/52	11,600	28.32	12/5/77	5,400	22.76
3/5/53	8,060	25.95	12/4/78	5,440	22.82
4/16/54	3,000	17.06	1/30/80	3,740	19.24
3/23/55	7,140	25.08	5/19/81	3,770	19.34
2/4/56	8,840	26.49	2/9/82	3,360	17.91
5/24/57	10,500	27.59	5/3/83	6,000	23.01
11/19/57	4,900	24.38	5/7/84	5,850	23.47
1/21/59	6,620	24.52	12/21/84	4,040	20.19
1/15/60	4,130	20.38	2/2/86	3,100	16.92
5/8/61	5,130	21.44	2/28/87	2,840	15.90
2/27/62	3,230	16.78	1/20/88	5,250	22.52
3/5/63	4,170	19.67	2/14/89	6,150	23.92
3/9/64	8,320	26.13	2/16/90	7,890	25.64
12/11/64	2,730	15.59	12/18/90	5,030	21.47
2/10/66	3,660	18.20	3/19/92	3,470	17.42
5/14/67	5,620	22.69	5/4/93	3,310	17.03
4/4/68	4,160	18.84	2/4/94	2,800	15.00
4/18/69	3,910	18.35		Discontinued	
4/2/70	4,020	20.45			

*Rough River Lake placed in operation beginning October 1959.*

**TABLE 2 (Continued)**

**GREEN RIVER AT LOCK 2, CALHOUN, KY.**

Drainage Area = 7,564 sq. mi.			Gage Datum = 353.95 (NGVD)		
<u>Date</u>	<u>Discharge in CFS</u>	<u>Stage in Feet</u>	<u>Date</u>	<u>Discharge in CFS</u>	<u>Stage in Feet</u>
1913		36.8	2/24/71	41,000	26.30
4/27/31	28,100	15.4	3/1/72	45,000	27.87
2/6/32	80,000	32.2	12/14/72	45,700	28.30
1/30/33	59,100	29.4	1/18/74	54,500	30.01
3/10/34	51,100	27.1	3/20/75	58,700	31.14
4/7/35	73,300	32.9	4/2/76	46,300	27.57
4/15/36	53,000	30.1	3/7/77	40,800	22.97
1/27/37	208,000	43.7	1/30/78	42,600	25.37
8/4/38	44,500	25.1	12/15/78	73,800	32.47
2/11/39	72,900	32.9	12/17/79	43,800	26.36
4/25/40	49,300	29.2	6/11/81	40,000	23.05
1/27/41	23,600	14.1	1/26/82	40,000	23.55
4/15/42	46,400	27.3	5/5/83	62,000	31.48
3/27/43	67,600	32.3	5/14/84	78,200	32.40
4/17/44	40,100	25.6	12/22/84	43,600	
3/8/45	70,900	33.6	2/21/86	32,800	20.01
2/19/46	51,700	29.2	3/4/87	44,300	23.99
1/8/47	41,200	24.3	1/24/88	48,000	22.87
2/22/48	57,000	30.3	2/21/89	80,000	33.37
2/24/49	71,300	32.3	2/15/90	51,500	29.42
1/16/50	86,300	36.3	12/26/90	50,900	29.84
1/21/51	63,400	32.0	12/6/91	40,500	20.56
3/31/52	72,000	32.5	3/5/93	32,000	19.31
5/26/53	48,000	28.5	3/15/94	45,300	27.54
4/21/54	36,900	20.4	5/23/95	53,400	29.66
3/29/55	66,800	32.2	3/9/96	38,500	24.00
2/25/56	67,000	32.6	3/7/97	86,000	34.37
2/8/57	54,600	30.7	4/21/98	44200	23.91
11/27/57	59,600	31.1	1/27/99	49300	27.47
1/27/59	42,200	28.2	2/21/00	31900	21.83
7/3/60	41,400	22.65	2/19/01	38000	19.43
3/12/61	52,700	30.52	3/23/02	47800	27.01
2/8/62	106,000	33.97	2/24/03	48500	27.93
3/18/63	42,600	28.93	2/9/04	40700	22.16
3/13/64	80,300	33.96	12/11/04	41100	20.91
4/3/65	47,800	28.87	1/26/06	37200	20.43
2/15/66	39,700	25.23	1/10/07	35100	22.19
3/13/67	44,900	28.81	4/8/08	53000	28.56
4/11/68	50,000	28.25	2/2/09	45700	24.51
6/27/69	46,900	24.09	5/9/10	70400	31.46
4/6/70	42,100	26.63	5/4/11	76900	34.04

*Green River Lake placed in operation beginning February 1969, Nolin River Lake placed in operation beginning March 1963, Barren River Lake placed in operation beginning March 1964 and Rough River Lake placed in operation beginning October 1959.*

## Climate Data

The National Oceanic and Atmospheric Administration Weather Service (NOAA) maintains year round surveillance of weather conditions for the study area at its various climate collection stations. Flood warning and anticipated weather conditions are issued to city / county officials, radio / television stations and the local press for further dissemination to the residents of the area.

Similar to the USGS stream gaging program, funding is limited and some climate stations have been discontinued in recent years. However, new technology such as NEXRAD radar provides rainfall information for the predicting of anticipated flooding, but the historic preservation of this information is still in the developmental stage.

The NOAA climate stations at Bowling Green, Ky. and Henderson, Ky. are near the study extremes and were selected as being representative of the study reach. The following temperature and precipitation data was extracted from the Midwestern Climate Center Internet web site.

### a. Recorded Temperature Data

The climate within the study area varies with moderately warm summers and cool winters with an average temperature of about 36 degrees Fahrenheit in the winter and 76 degrees Fahrenheit in the summer.

Bowling Green, Kentucky			(Averages: 1961-1990 Extremes: 1893-1996)								
Averages			Daily Extremes				Mean Extremes				
	<u>Max</u>	<u>Min</u>	<u>Mean</u>	<u>High</u>	<u>Date</u>	<u>Low</u>	<u>Date</u>	<u>High</u>	<u>Year</u>	<u>Low</u>	<u>Year</u>
Annual	67.5	46.0	56.8	113	7/28/30	-21	1/23/63	62.7	1921	55.0	1958
Winter	45.4	26.4	36.0	83	2/28/18	-21	1/23/63	47.7	1932	28.3	1978
Spring	68.0	45.4	56.7	100	5/28/11	-6	3/5/60	62.9	1921	51.5	1960
Summer	87.1	65.1	76.1	113	7/28/30	39	6/13/03	82.4	1936	73.0	1967
Fall	69.6	47.0	58.3	105	9/7/25	-7	11/25/50	66.7	1931	52.9	1976

Henderson, Kentucky			(Averages: 1961-1990 Extremes: 1896-1996)								
Averages			Daily Extremes				Mean Extremes				
	<u>Max</u>	<u>Min</u>	<u>Mean</u>	<u>High</u>	<u>Date</u>	<u>Low</u>	<u>Date</u>	<u>High</u>	<u>Year</u>	<u>Low</u>	<u>Year</u>
Annual	67.3	46.4	56.9	113	7/13/36	-20	1/19/94	67.0	1931	55.0	1947
Winter	44.1	26.3	35.2	80	2/13/62	-20	1/19/94	45.4	1932	26.7	1936
Spring	68.0	46.2	57.1	97	5/31/34	-4	3/6/60	61.7	1977	51.7	1960
Summer	87.2	65.1	76.2	113	7/13/36	41	6/2/56	84.1	1936	72.7	1946
Fall	69.9	48.0	59.0	104	9/8/39	-5	11/25/50	65.3	1931	53.5	1976

b. Recorded Precipitation Data

The rainfall within the study area is generally evenly distributed throughout the year with extremes, maximum or minimums, occurring during any season of any given year.

		Bowling Green, Kentucky (Averages: 1961-1990 Extremes: 1893-1996)						Snow		
		Total Precipitation								
	<u>Mean</u>	<u>High</u>	<u>Year</u>	<u>Low</u>	<u>Year</u>	<u>1-Day Max</u>	<u>Date</u>	<u>Mean</u>	<u>High</u>	<u>Year</u>
Annual	50.93	76.56	1979	30.50	1930	11.02	4/29/37	12.8	49.8	1960
Winter	12.98	30.12	1950	5.45	1963	6.15	12/7/24	11.0	34.7	1978
Spring	14.36	25.58	1983	5.87	1900	11.02	4/29/37	1.4	32.0	1960
Summer	12.42	19.56	1938	5.22	1952	5.69	6/23/69	0.0	0.0	-
Fall	11.17	22.39	1921	2.82	1963	6.02	9/13/79	0.4	8.0	1966

		Henderson, Kentucky (Averages: 1961-1990 Extremes: 1896-1996)						Snow		
		Total Precipitation								
	<u>Mean</u>	<u>High</u>	<u>Year</u>	<u>Low</u>	<u>Year</u>	<u>1-Day Max</u>	<u>Date</u>	<u>Mean</u>	<u>High</u>	<u>Year</u>
Annual	44.80	71.01	1950	28.25	1963	6.33	3/11/35	15.9	39.5	1978
Winter	9.80	28.22	1950	3.68	1977	4.28	12/30/32	12.4	35.5	1985
Spring	13.62	27.27	1983	4.61	1941	6.33	3/11/35	2.8	21.5	1960
Summer	11.05	19.00	1950	2.13	1936	5.02	7/10/65	0.0	0.0	-
Fall	10.33	22.43	1984	2.47	1963	4.72	9/24/84	0.7	8.5	1958

Hydrologic and Hydraulic Analysis

This report will provide current modified (indicating the benefits of the upstream COE lake operation) flood frequency and flow duration profiles for the Green River and Barren River study reach from which water surface elevations could be used as the basis of further analysis. To develop water surface profiles two main elements are required. Frequency or duration discharge values must be developed and the stream physical geometry must be established to which the flow values will be applied.

a. Development of Flood Frequency Discharges.

Natural peak discharge-frequency values for the Green River and Barren River were developed from period of record data for gaged locations on the respective streams. Data modified by operational periods for Green, Nolin, Barren, and Rough River Lakes were returned to natural conditions and included in the natural data analyses.

Final existing condition (modified) discharge-frequency curves were developed through paper operation, October, 1939 through September, 1980 for the four lake projects. Resultant lake holdouts (developed from 12-hour storage differences in each lake) were routed through each gage location to determine the modified peak discharge events. The final modified discharge-frequency values for the Green River and Barren River study reach were based on the “paper operation” period and actual lake operation period. Pertinent discharge values were selected from the relationship developed using these gages. Determination of the final frequency-

discharge relationships were made using Bulletin No. 17B criterion and considered omission of low and high outliers, weighting with a generalized skew, and historically adjusting the data where possible.

The flood frequency discharges for the USGS gages located at Paradise, Munfordville, Calhoun, and Kyrock, Kentucky were updated from the original report to include the latest available annual peak flow data from USGS. As all of the other gages in the study area were discontinued prior to 1997, they did not require an update. While the inclusion of these extra data points did alter the flood frequency discharges at all four gages, none were changed by more than 5%. Because of this, it was determined that an update of the hydraulic analysis using these discharges was not necessary, as significant changes to water surface elevations would not be expected. By the same logic, stage frequency curves would not be expected to change drastically and were not updated. The natural and modified discharge and stage frequency curves, and the record upon which they were based, are shown on Plates 6 through 21 for the USGS gaging stations within the study reach.

#### b. Surveyed Cross-Sections and Mapping

Surveyed natural cross-sections were obtained at uniform intervals from top of bank to top of bank; bridge geometry was field surveyed. Overbank areas were added to the surveyed data and additional cross-sections estimated using the best available mapping.

The best available mapping for the study area is USGS quadrangle sheets having a scale of 1"=2000' with 10-foot or 20-foot contour intervals. This large scale and contour interval together with estimated stream geometry below the map water surface, in some locations, limits the degree of accuracy presented as the final product.

#### c. Hydraulic Analyses

Analyses of the hydraulic characteristics for the streams studied were carried out to provide estimates of the water surface elevations of selected recurrence intervals.

Roughness coefficients (Manning's  $n$ ) were developed from field inspection and known roughness values for comparable streams in adjacent watersheds. In addition, 1950, 1962, and 1974 flood highwater marks were reproduced in order to verify the roughness values for the Green River. Similarly, the 1957 flood highwater marks were used for Barren River. The present study used roughness coefficients ranging from 0.030-0.065 for the channel and 0.055-0.085 for overbanks (Green River) and 0.035-0.048 for the channel and 0.050-0.075 for overbanks (Barren River).

Water surface profiles of selected discharge magnitude, existing conditions and with various dams removed, were computed using the HEC-2 step-backwater computer program. The starting water surface elevations were computed by the slope/area method. Profiles were drawn showing the computed water surface elevations of the selected discharge values and are presented on Plates 22 through 30. The hydraulic analyses for this study are based on unobstructed flow. The water surface elevations shown on the profiles are thus considered valid

only if hydraulic structures remain unobstructed, operate properly, and do not fail. All elevations are referenced to the National Geodetic Vertical Datum of 1929 (NGVD).

During floods, debris collecting on bridges could decrease their carrying capacity and cause greater water depths (backwater effect) upstream of these structures. Since the occurrence and amount of debris are indeterminate factors, only the physical characteristics of the structures were considered in preparing selected water surface profiles. Similarly, the maps of flooded areas show the backwater effect of obstructive bridges and culverts, but do not reflect increased water surface elevation that could be caused by debris collection against the structures, or by deposition of silt in the stream channel under structures. None of the bridges in the study area are significantly restrictive to flows of the flows studied. However, the approaches to most of these bridges are at a low elevation and subject to flooding and therefore impassable. The Green River or the Barren River lock and dam structures have little or no effect on larger flood water surface profiles.

Water velocities during floods depend largely on the size and shape of the cross sections, conditions of the stream, and the bed slope, all of which vary on different streams and at different locations on the same stream.

d. Discharge / Elevation Duration

Flow duration is a measure of the range and variability of stream flows. Usually presented as a graph of volume flow rate (discharge in cubic feet per second) versus percent of time that flows are greater than, or equal to, a selected flow during the period of record studied.

Duration curves were developed for the USGS gaging stations Green River at Munfordville, Brownsville at Lock 6, Woodbury at Lock 4, Calhoun at Lock 4, Nolin River at Kyrock and Barren River at Bowling Green. The period of record, modified by Green River, Barren River, Nolin River and Rough River Lakes, for each site was analyzed. Each mean daily discharge value was placed in ascending order, individual number of occurrences tabulated, then the percent of occurrence versus total days in the period of record was computed. Flow duration values for Green River Lock 6 were translated upstream to the Mammoth Cave gaging station and downstream from Bowling Green to the Barren River Lock 1 site by the drainage-area relationship method. Table 3 presents annual discharge duration values for the published USGS gaging stations within the study area.

**TABLE 3**

**DISCHARGE DURATION**  
(IN CUBIC FEET PER SECOND)

ANNUAL

<u>Gaging Station</u>	<u>Period of Record</u>	<u>Drainage Area (sq. mi.)</u>	<u>100 %</u>	<u>90 %</u>	<u>70 %</u>	<u>50 %</u>	<u>25 %</u>	<u>10 %</u>	<u>5 %</u>	<u>1 %</u>
Munfordville	1970-1990	1,673	157	300	695	1,550	4,430	7,120	9,010	18,500
Kyrock	1964-1990	707	0*	43*	233	470	1,170	2,660	4,540	7,770
Brownsville	1964-1990	2,762	190	589	1,240	2,290	6,400	12,400	15,500	25,300
Bowling Green	1965-1990	1,849	75	288	719	1,990	4,310	6,040	7,100	12,500
Woodbury	1964-1990	5,404	356	1,130	2,580	5,200	12,800	22,600	29,200	48,200
Calhoun	1962-1990	7,566	455	1,390	3,250	6,490	16,700	31,100	39,400	52,500

**TABLE 3 (Continued)****AUGUST**

<u>Gaging Station</u>	<u>Period of Record</u>	<u>Drainage Area (sq. mi.)</u>	<u>99 %</u>	<u>90 %</u>	<u>70 %</u>	<u>50 %</u>	<u>25 %</u>	<u>10 %</u>	<u>5 %</u>	<u>1 %</u>
Munfordville	1970-1990	1,673	167	235	299	421	729	3,070	4,590	7,190
Kyrock	1964-1990	707	0*	12*	95	181	317	596	863	2,690
Brownsville	1964-1990	2,762	195	389	545	726	1,350	3,340	6,140	12,500
Bowling Green	1965-1990	1,849	93	163	242	410	978	3,110	3,800	5,550
Woodbury	1964-1990	5,404	360	719	1,040	1,500	3,070	6,320	8,980	21,600
Calhoun	1962-1990	7,566	449	850	1,200	1,880	3,810	6,880	10,900	21,500

(\*) Minimum design outflow from Nolin River Lake is 50 cfs. However, special maintenance operations have required short periods of zero outflow and are reflected in these discharge duration computations.

Best-fit discharge versus water surface elevation rating curves were developed from USGS rating curves and/or the HEC-2 computer model for the Green River Lock 6, Mammoth Cave (at mile 197) and Nolin River at Kyrock sites. Estimated, existing condition and with Dam 6 removed, discharge versus water surface elevation rating curves are presented on Plates 31 through 33. Estimated flow duration water surface elevation profiles, existing condition and with various lock and dams in place and/or removed, are presented on Plates 23 through 30.

Annual elevation duration curves, (percent of time a selected water surface elevation is equaled or exceeded versus the selected water surface elevation) for the Green River Lock 6, Mammoth Cave (at mile 197) and Nolin River at Kyrock sites, are presented on Plates 34 through 36. Existing condition curves and with Green River dam 6 removed curves are shown on each Plate. In addition, discharge duration curves based on annual and August flows, are furnished for each published gaging station within the study reach on Plates 37 through 42.

Table 4 presents representative elevation duration values that can be derived from the Green River at Mammoth Cave duration curve.

**TABLE 4**

**GREEN RIVER AT MAMMOTH CAVE - MILE 197**  
**ELEVATION DURATION DATA**

**Estimated Water Surface Elevation in Feet (NGVD)**

<u>Percent of Time an Elevation is Equaled or Exceeded</u>	<u>Existing Condition</u>	<u>Dam 6 Removed</u>
100 %	421.4	417.1
90 %	422.3	418.9
80 %	423.0	420.2
70 %	423.9	421.6
60 %	425.1	423.1
50 %	426.7	425.2
40 %	429.1	427.9
30 %	432.8	432.0
20 %	436.3	435.7
10 %	440.4	440.1

e. Elevation Hydrographs


Elevation hydrographs, water surface elevation versus time, were developed from observed mean daily discharge values applied to the adopted elevation versus discharge rating curves (Plates 31 and 33). The selected presentation includes data from the Green River at Brownsville and Nolin River at Kyrock USGS gages. These data include existing conditions and the Dam 6 removed scenario. Brownsville data is shown on Plates 43 through 48 and Kyrock data on Plates 49 through 55.

Nolin River Lake Tailwater

Examination of elevation hydrographs, Plates 49 through 55, for the Nolin River Lake tailwater (Nolin River at Kyrock) revealed that there were possibly nine occurrences in 25 years (1969 through 1993) when the increase in tailwater velocities, at the beginning of a Nolin Lake release, would be more severe with Dam 6 removed than under existing conditions. During these occurrences, the tailwater elevation may increase by 13 feet in one day, compared to 7 feet under existing lake operation and river conditions. This change in tailwater fluctuations would cause a temporary increase in velocities, increasing the tendency for stream bank failures in the stream reach immediately downstream of Nolin Dam. This tendency could be reduced by a lengthened time that Nolin Lake releases are increased from minimum release to bank-full.

No modification of the stilling basin would be required because it was designed to meet maximum release requirements when backwater from Lock and Dam 6 was not a factor. Since the tailwater area has already been protected with grouted rip-rap, significant bank caving is unlikely.

Examination of elevation hydrographs for Green River at Brownsville (Lock and Dam 6), Plates 43 through 48 revealed that there were possibly three occurrences in 23 years (1969 through 1991) when drawdown after a flood release from Nolin River Lake would be more severe with Dam 6 removed. However, these occurrences could also be alleviated by avoiding sudden reductions in Nolin River Lake releases. Possible bank caving would be too rare to estimate cost of repair on an annual basis.

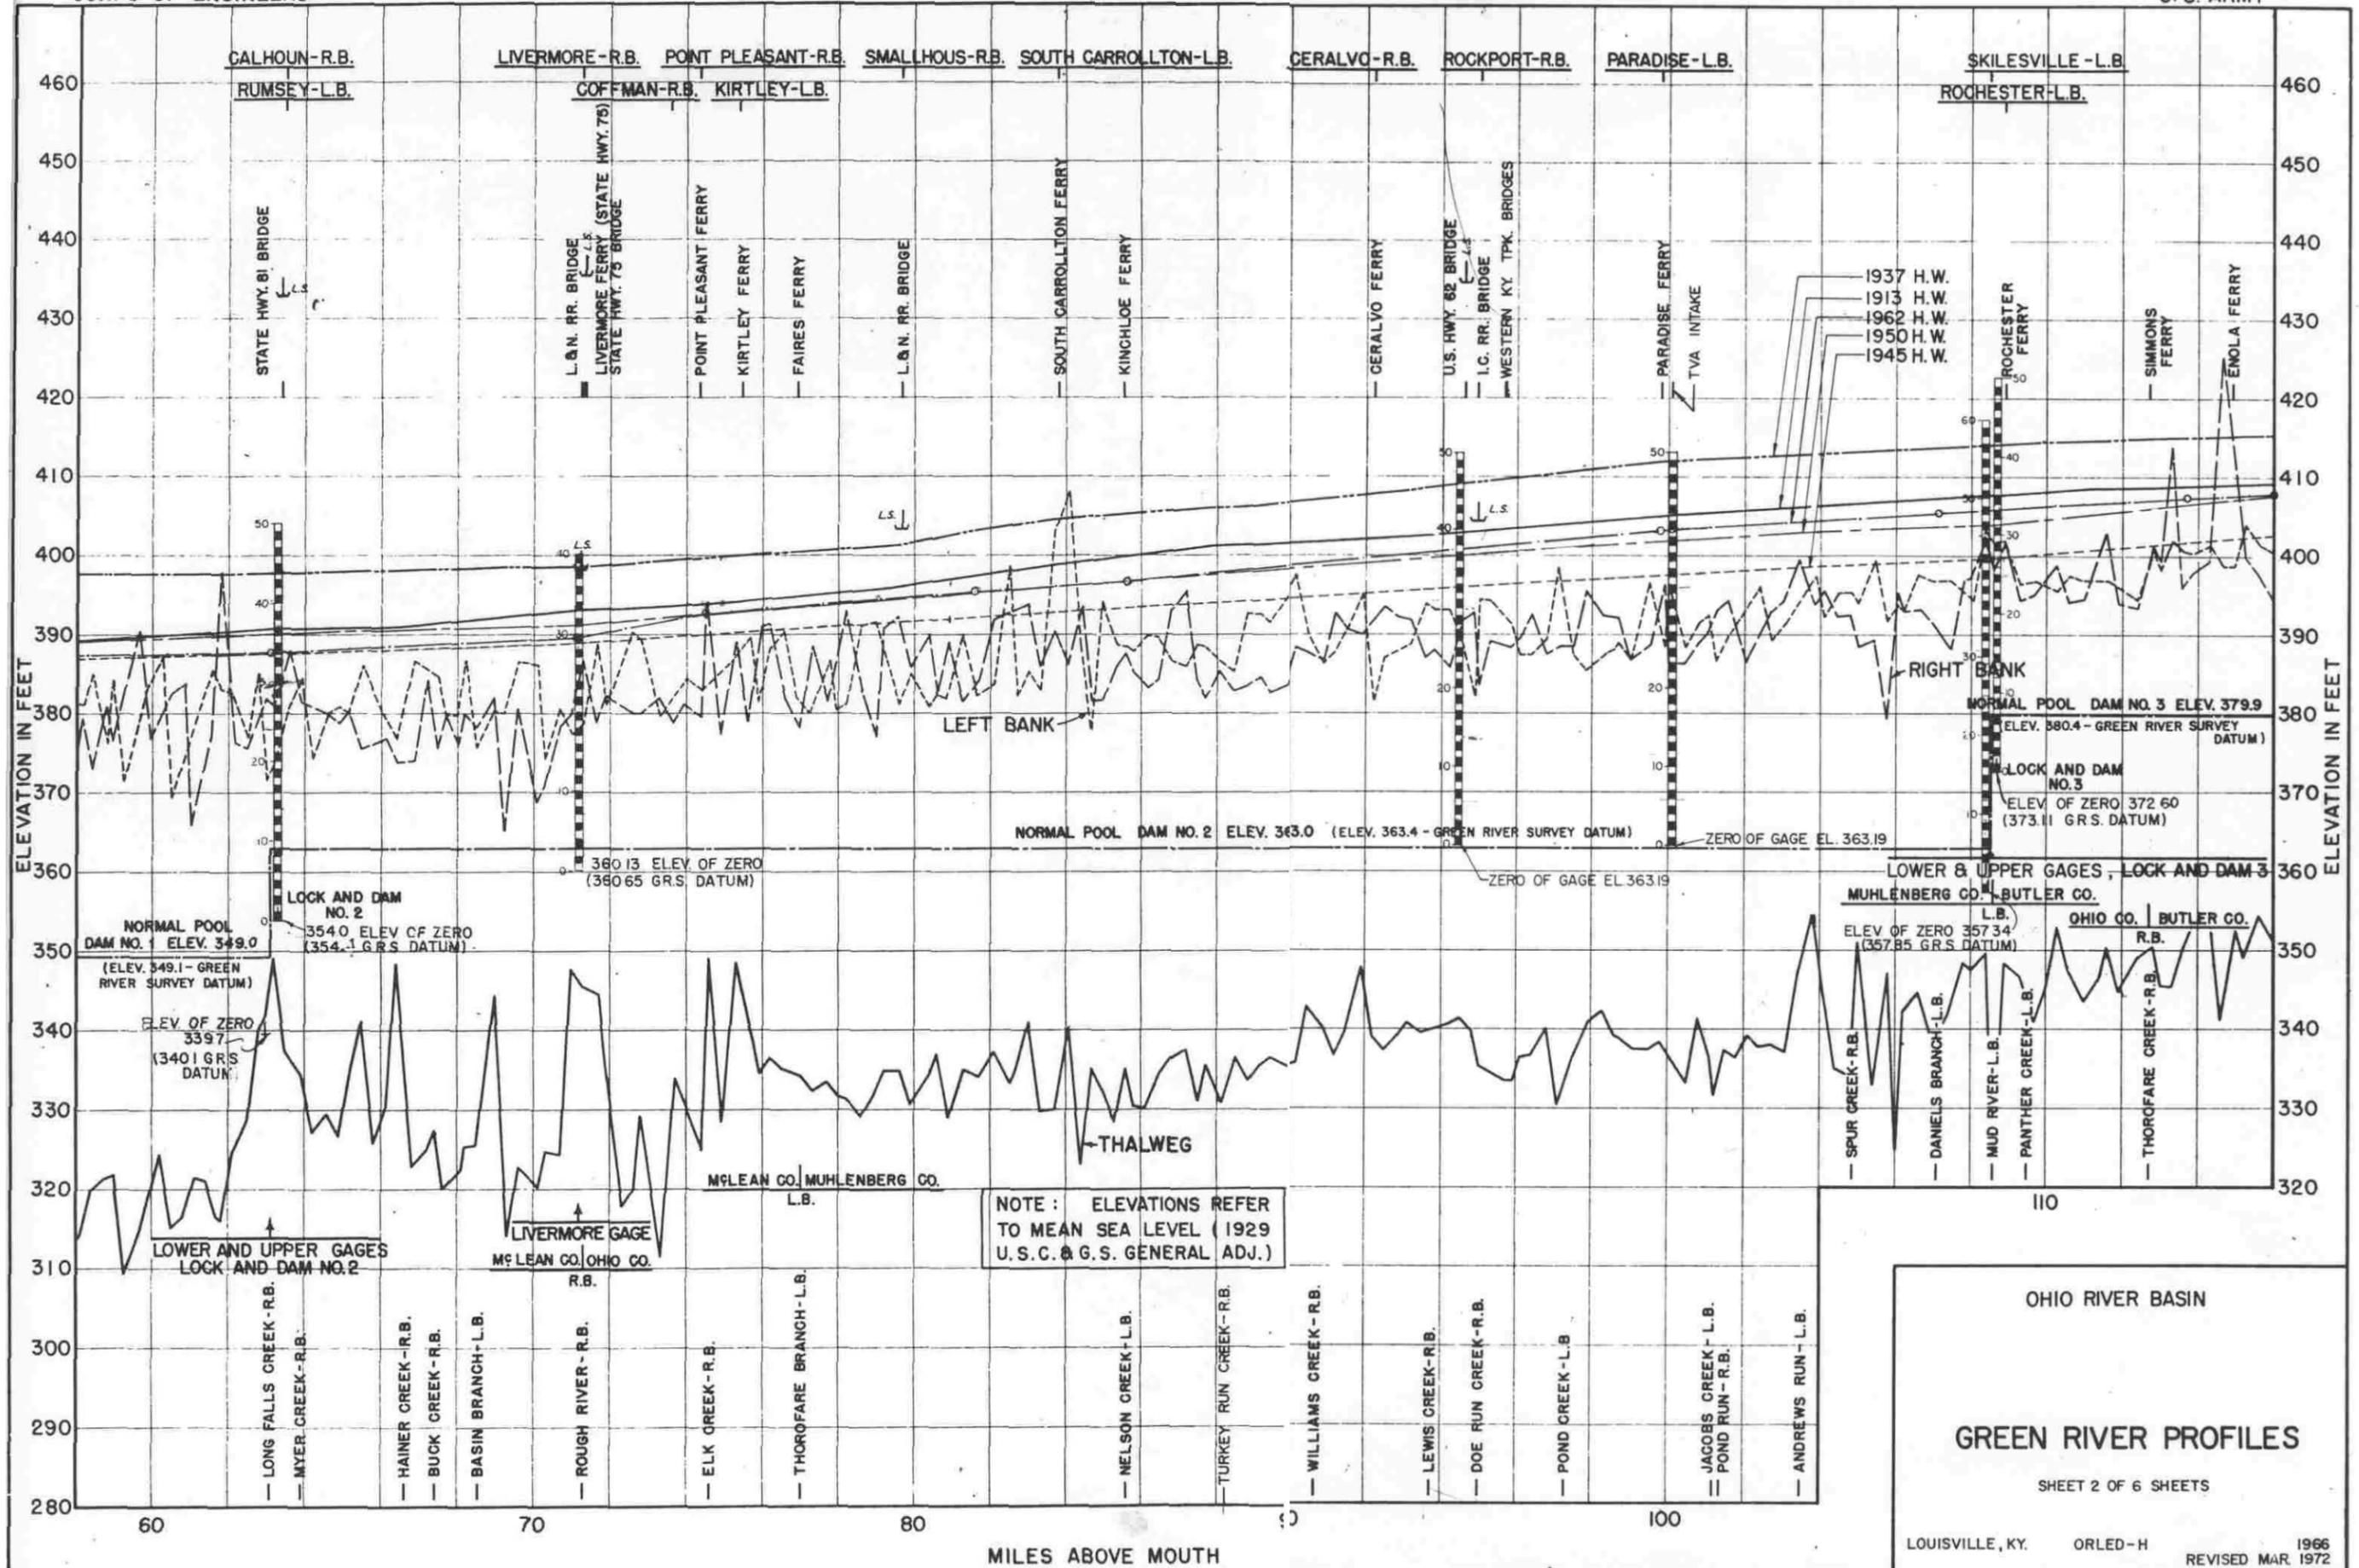


OHIO RIVER BASIN

**GREEN RIVER PROFILES**

SHEET 2 OF 6 SHEETS

LOUISVILLE, KY. ORLED-H 1966  
REVISED MAR. 1972

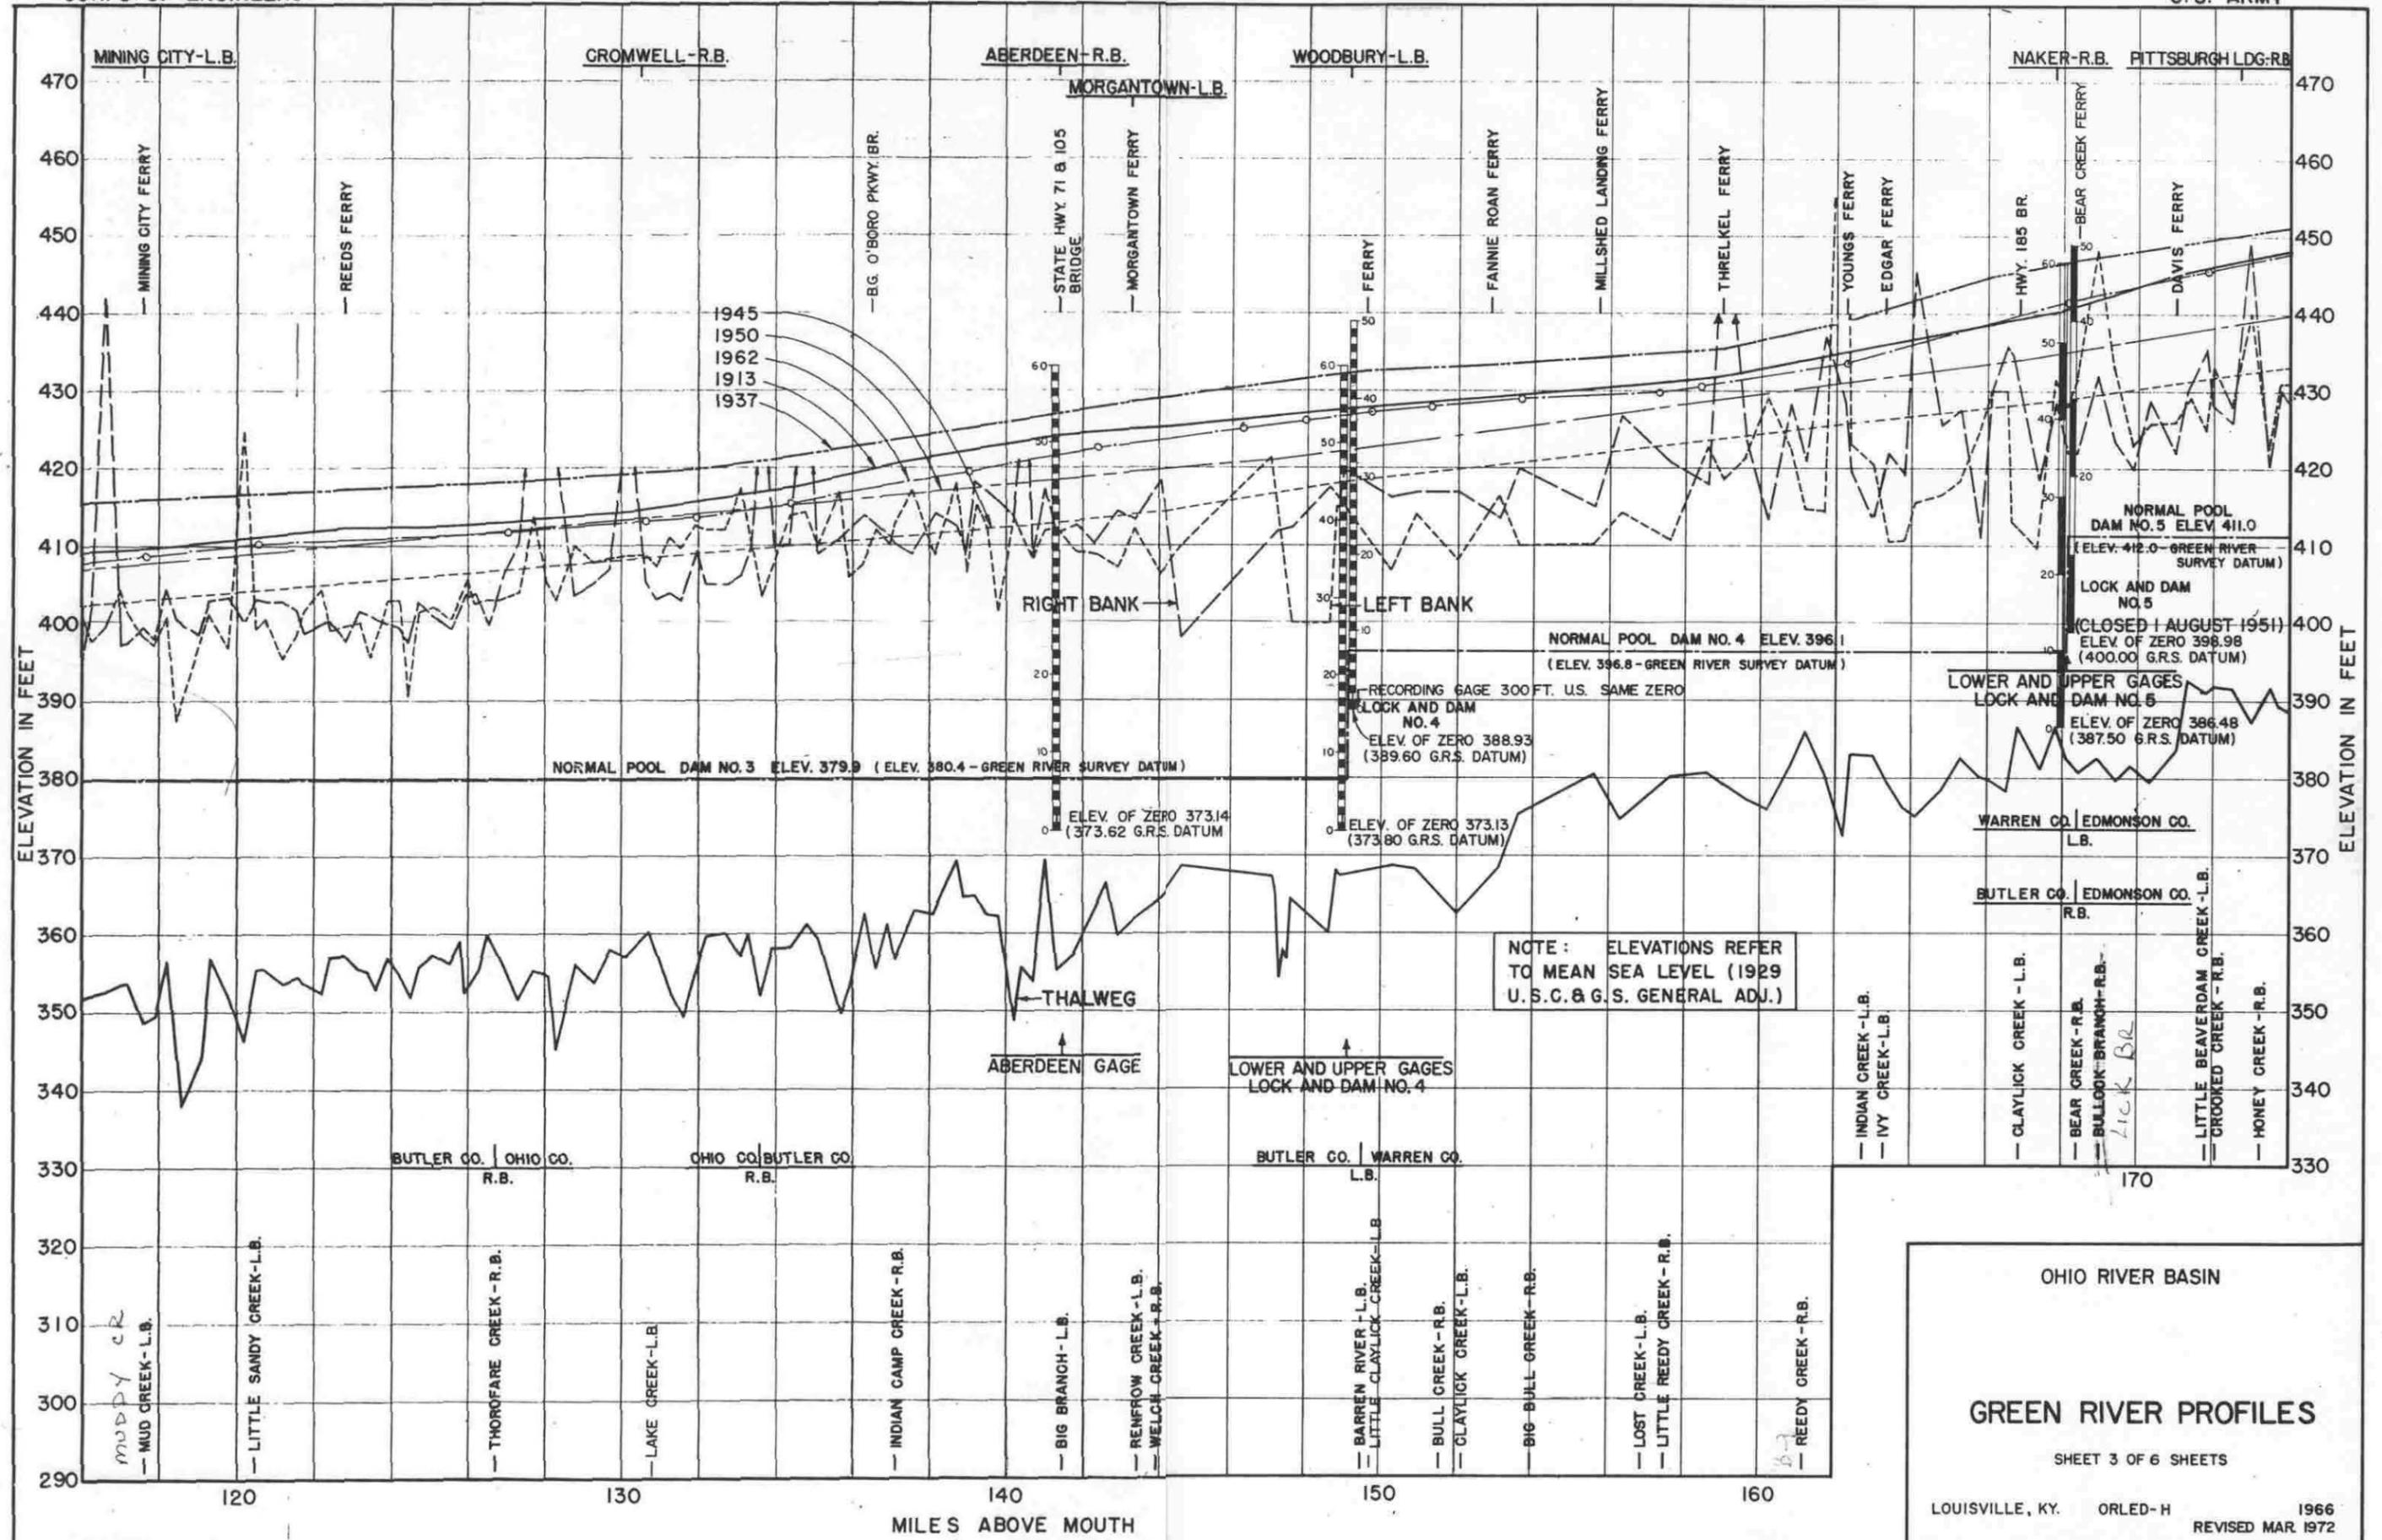


OHIO RIVER BASIN

## GREEN RIVER PROFILES

SHEET 3 OF 6 SHEETS

LOUISVILLE, KY. ORLED-H 1966  
REVISED MAR 1972

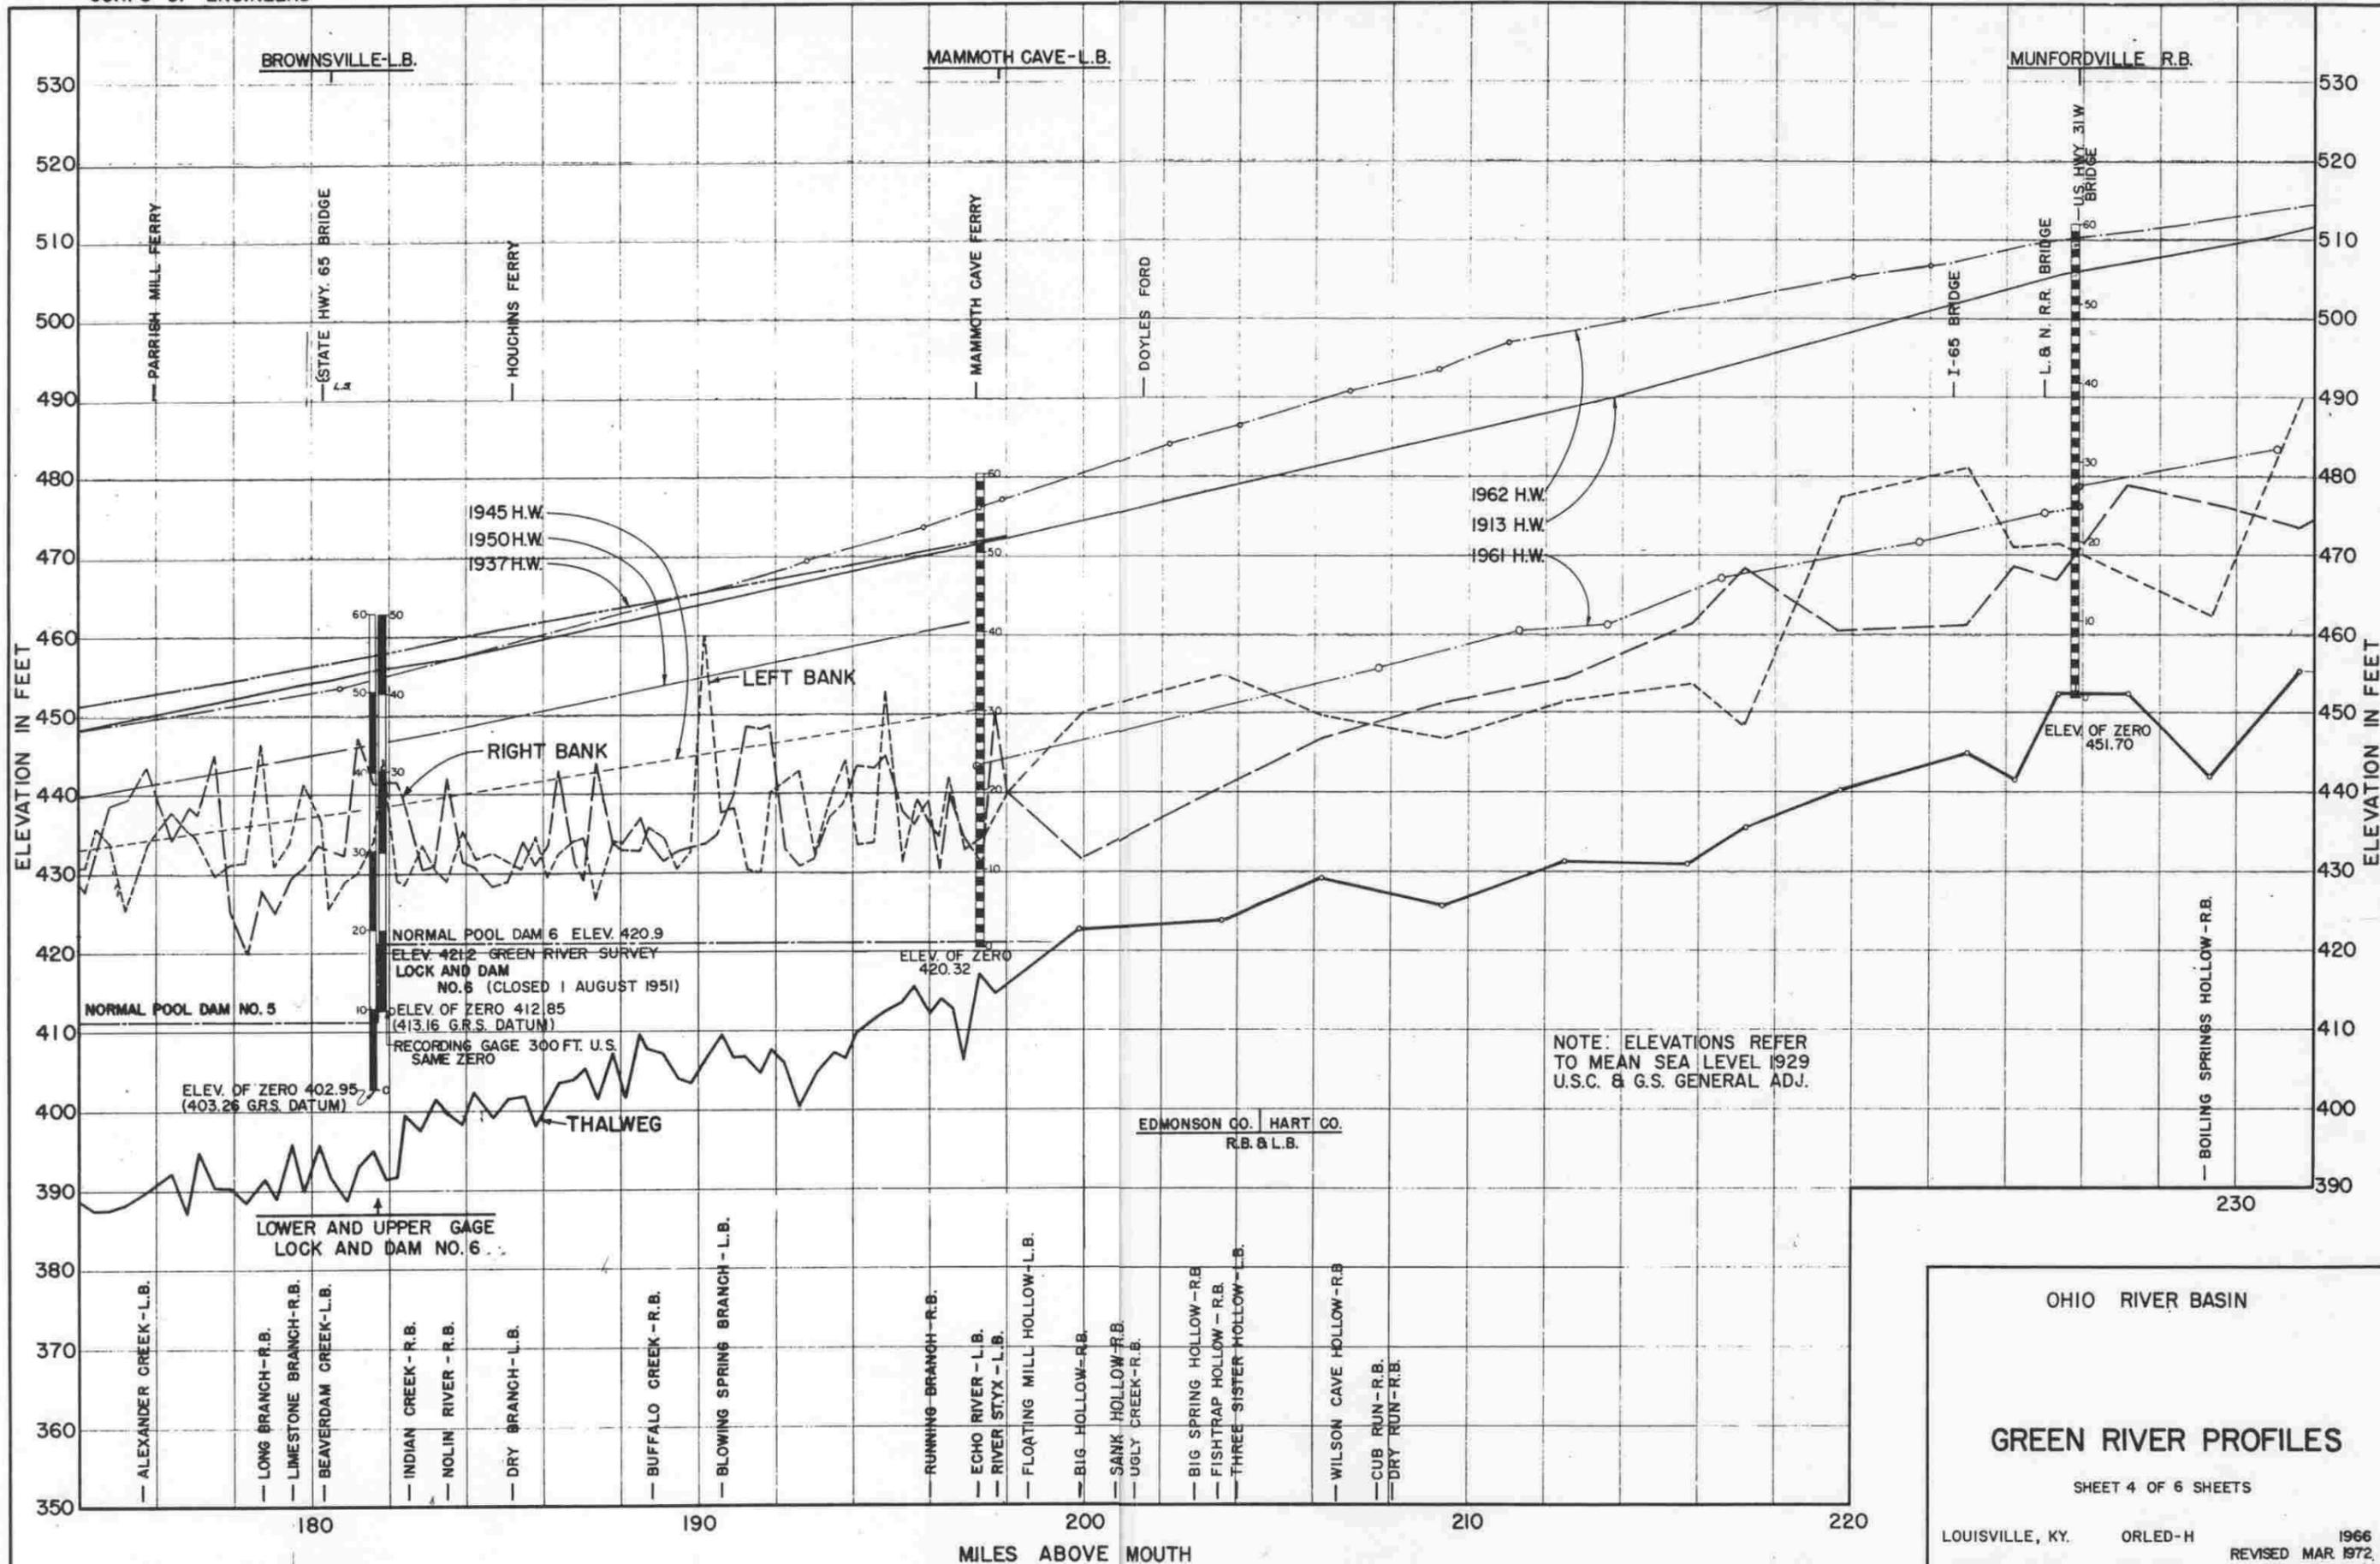


OHIO RIVER BASIN

## GREEN RIVER PROFILES


SHEET 4 OF 6 SHEETS

LOUISVILLE, KY.    ORLED-H    1966  
 REVISED MAR 1972

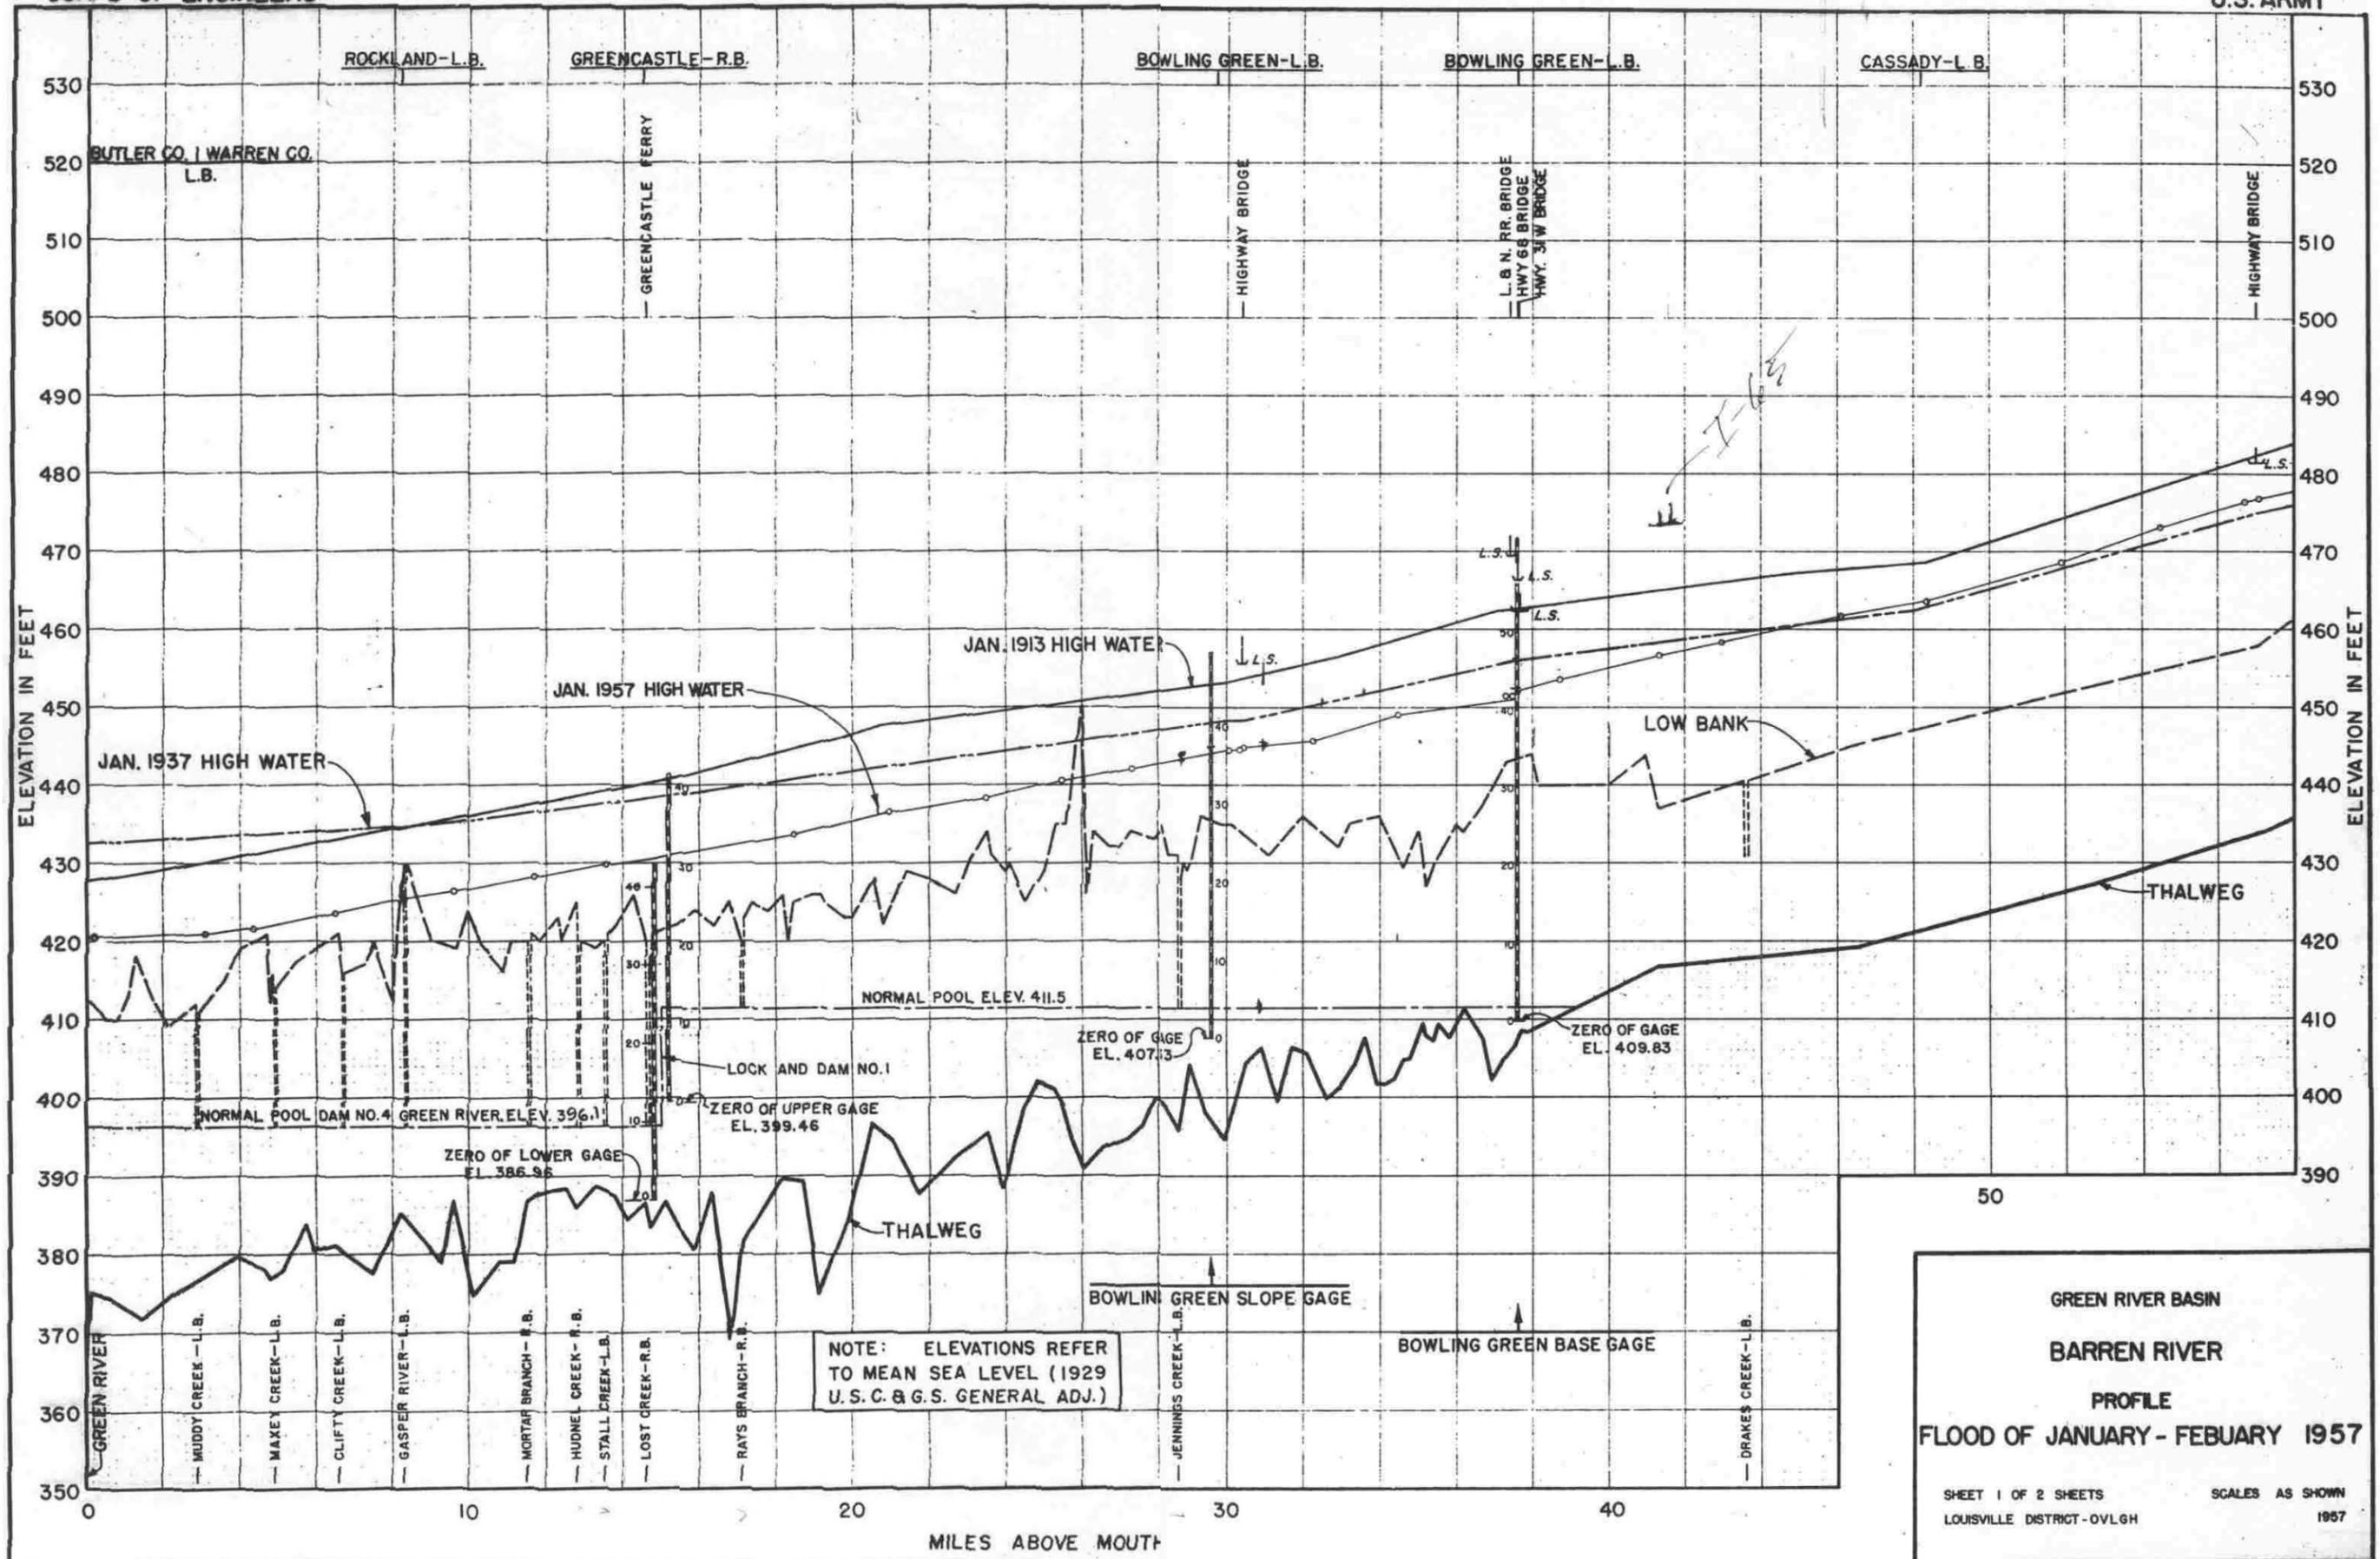

**GREEN RIVER BASIN**  
**BARREN RIVER**  
**PROFILE**  
**FLOOD OF JANUARY - FEBRUARY 1957**


SHEET 1 OF 2 SHEETS      SCALES AS SHOWN  
 LOUISVILLE DISTRICT-OVLGH      1957

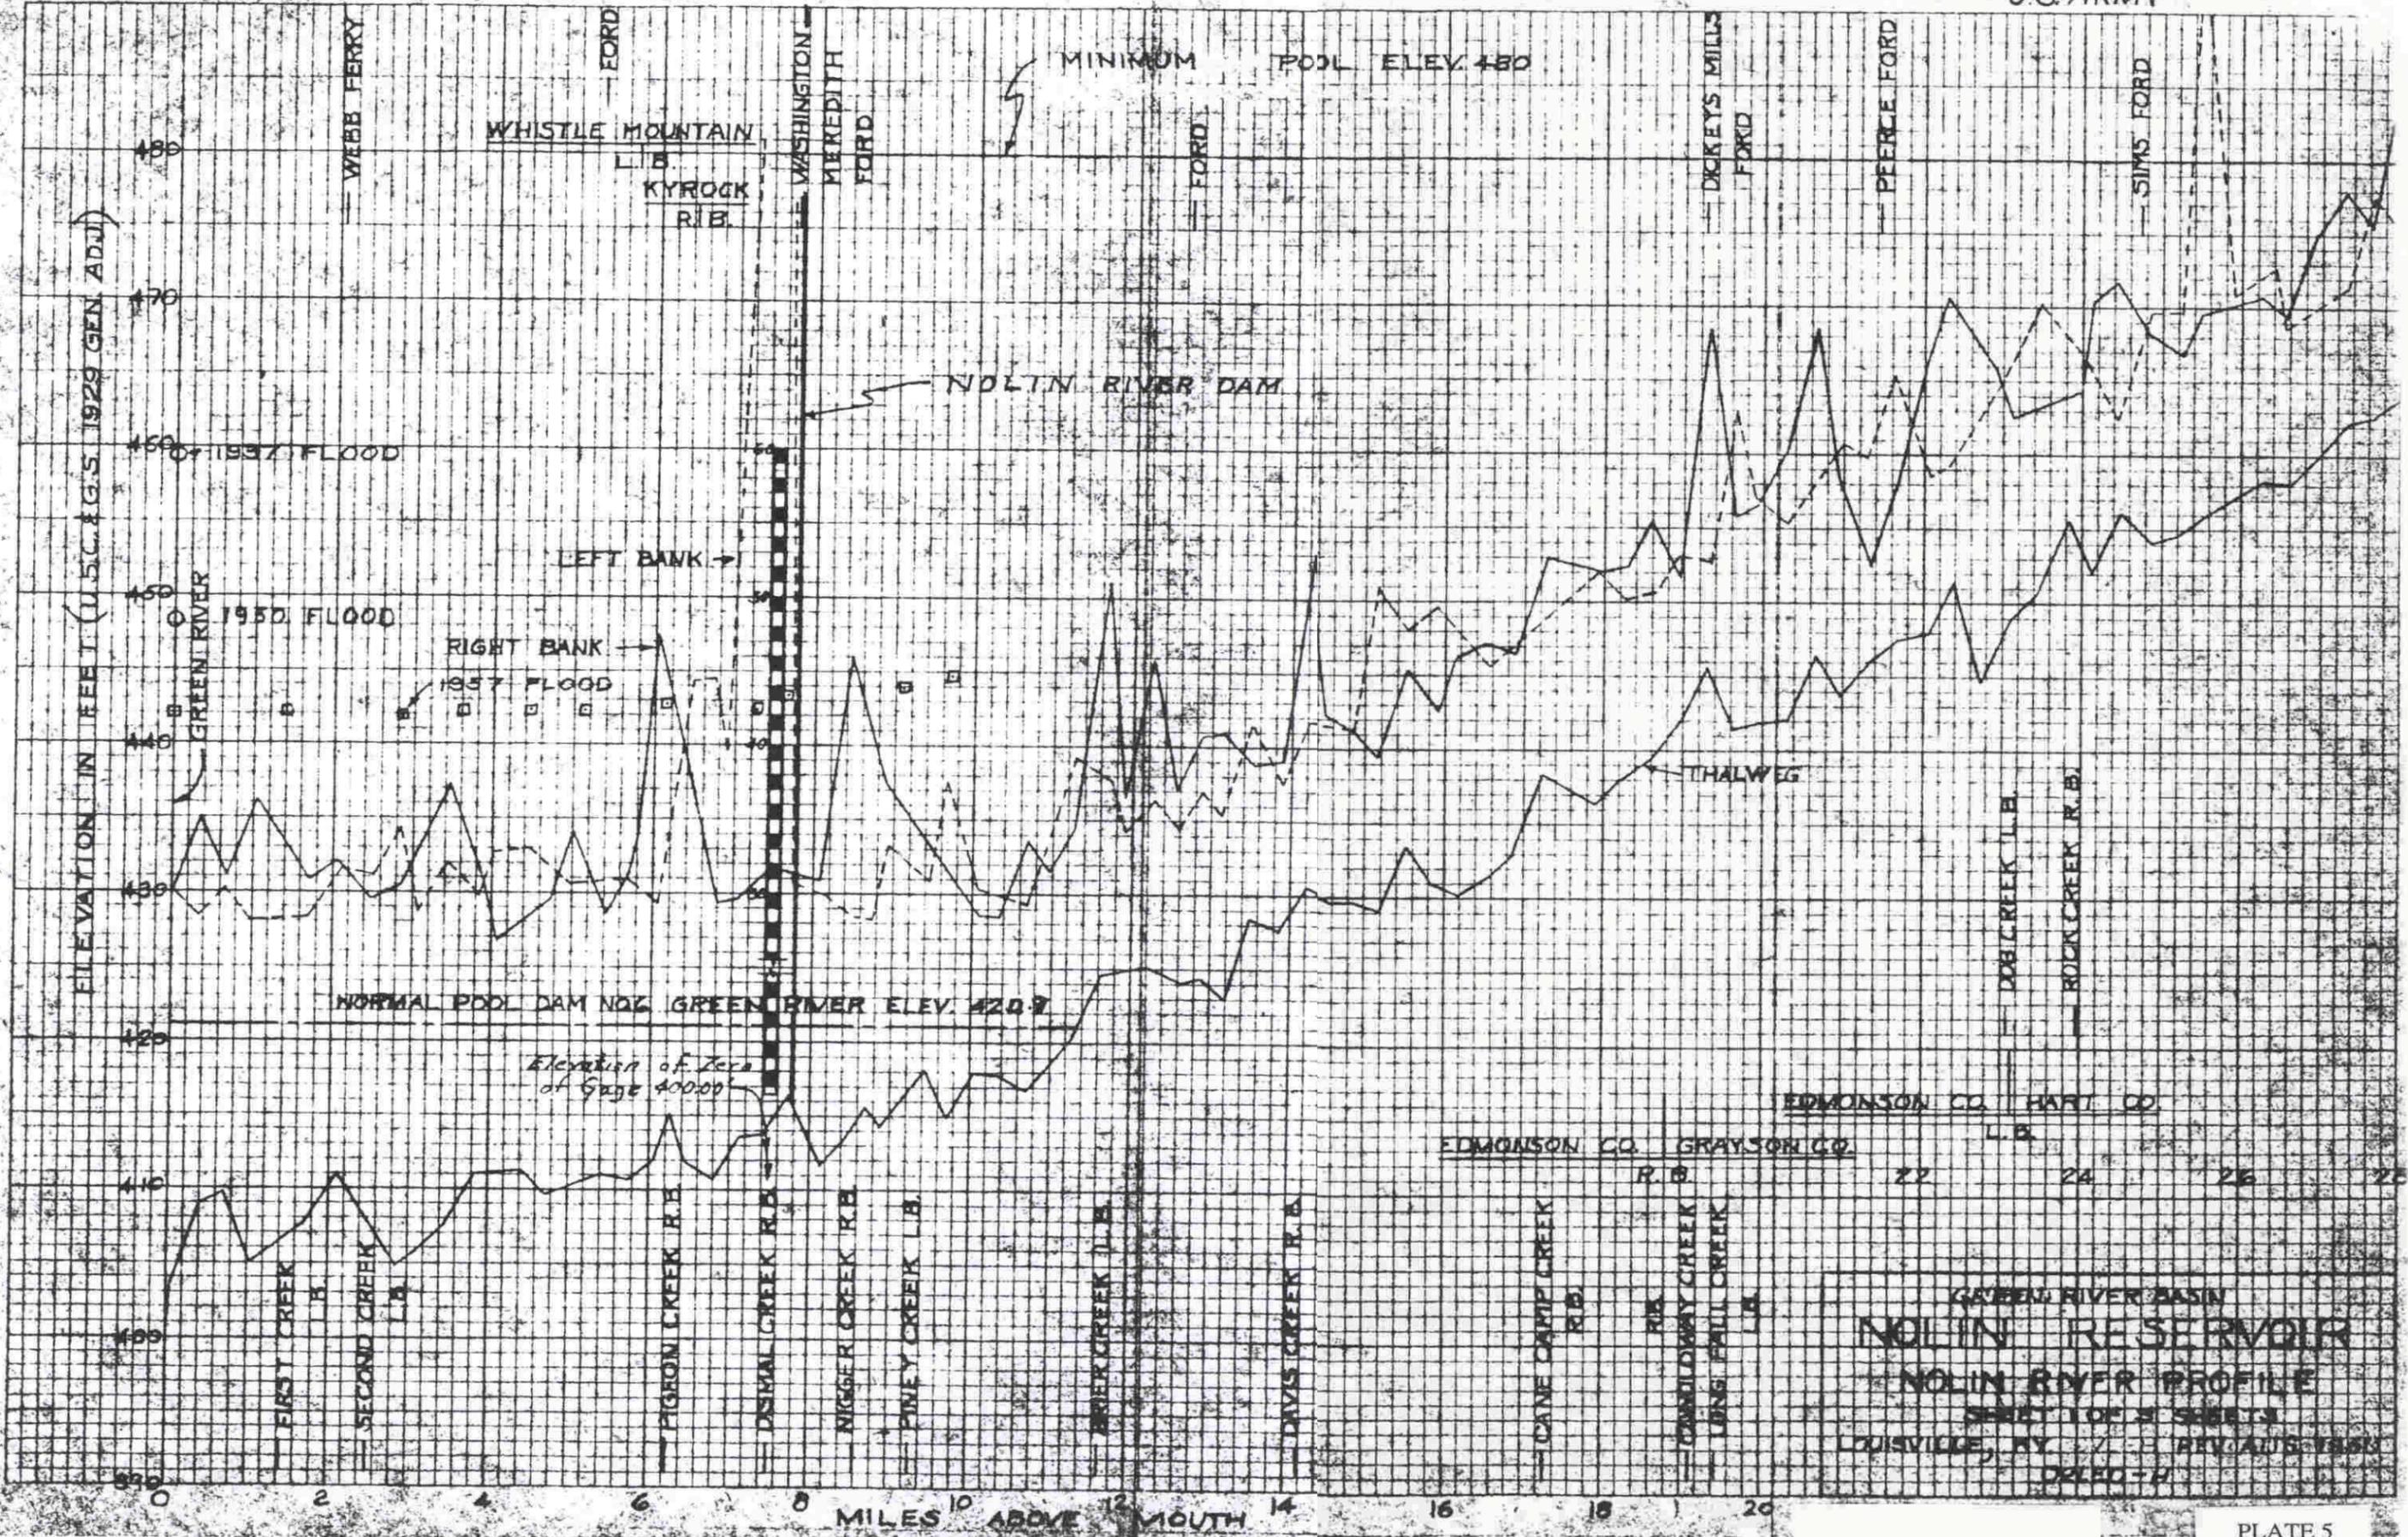






# NOLIN RIVER AT KYROCK, KY.

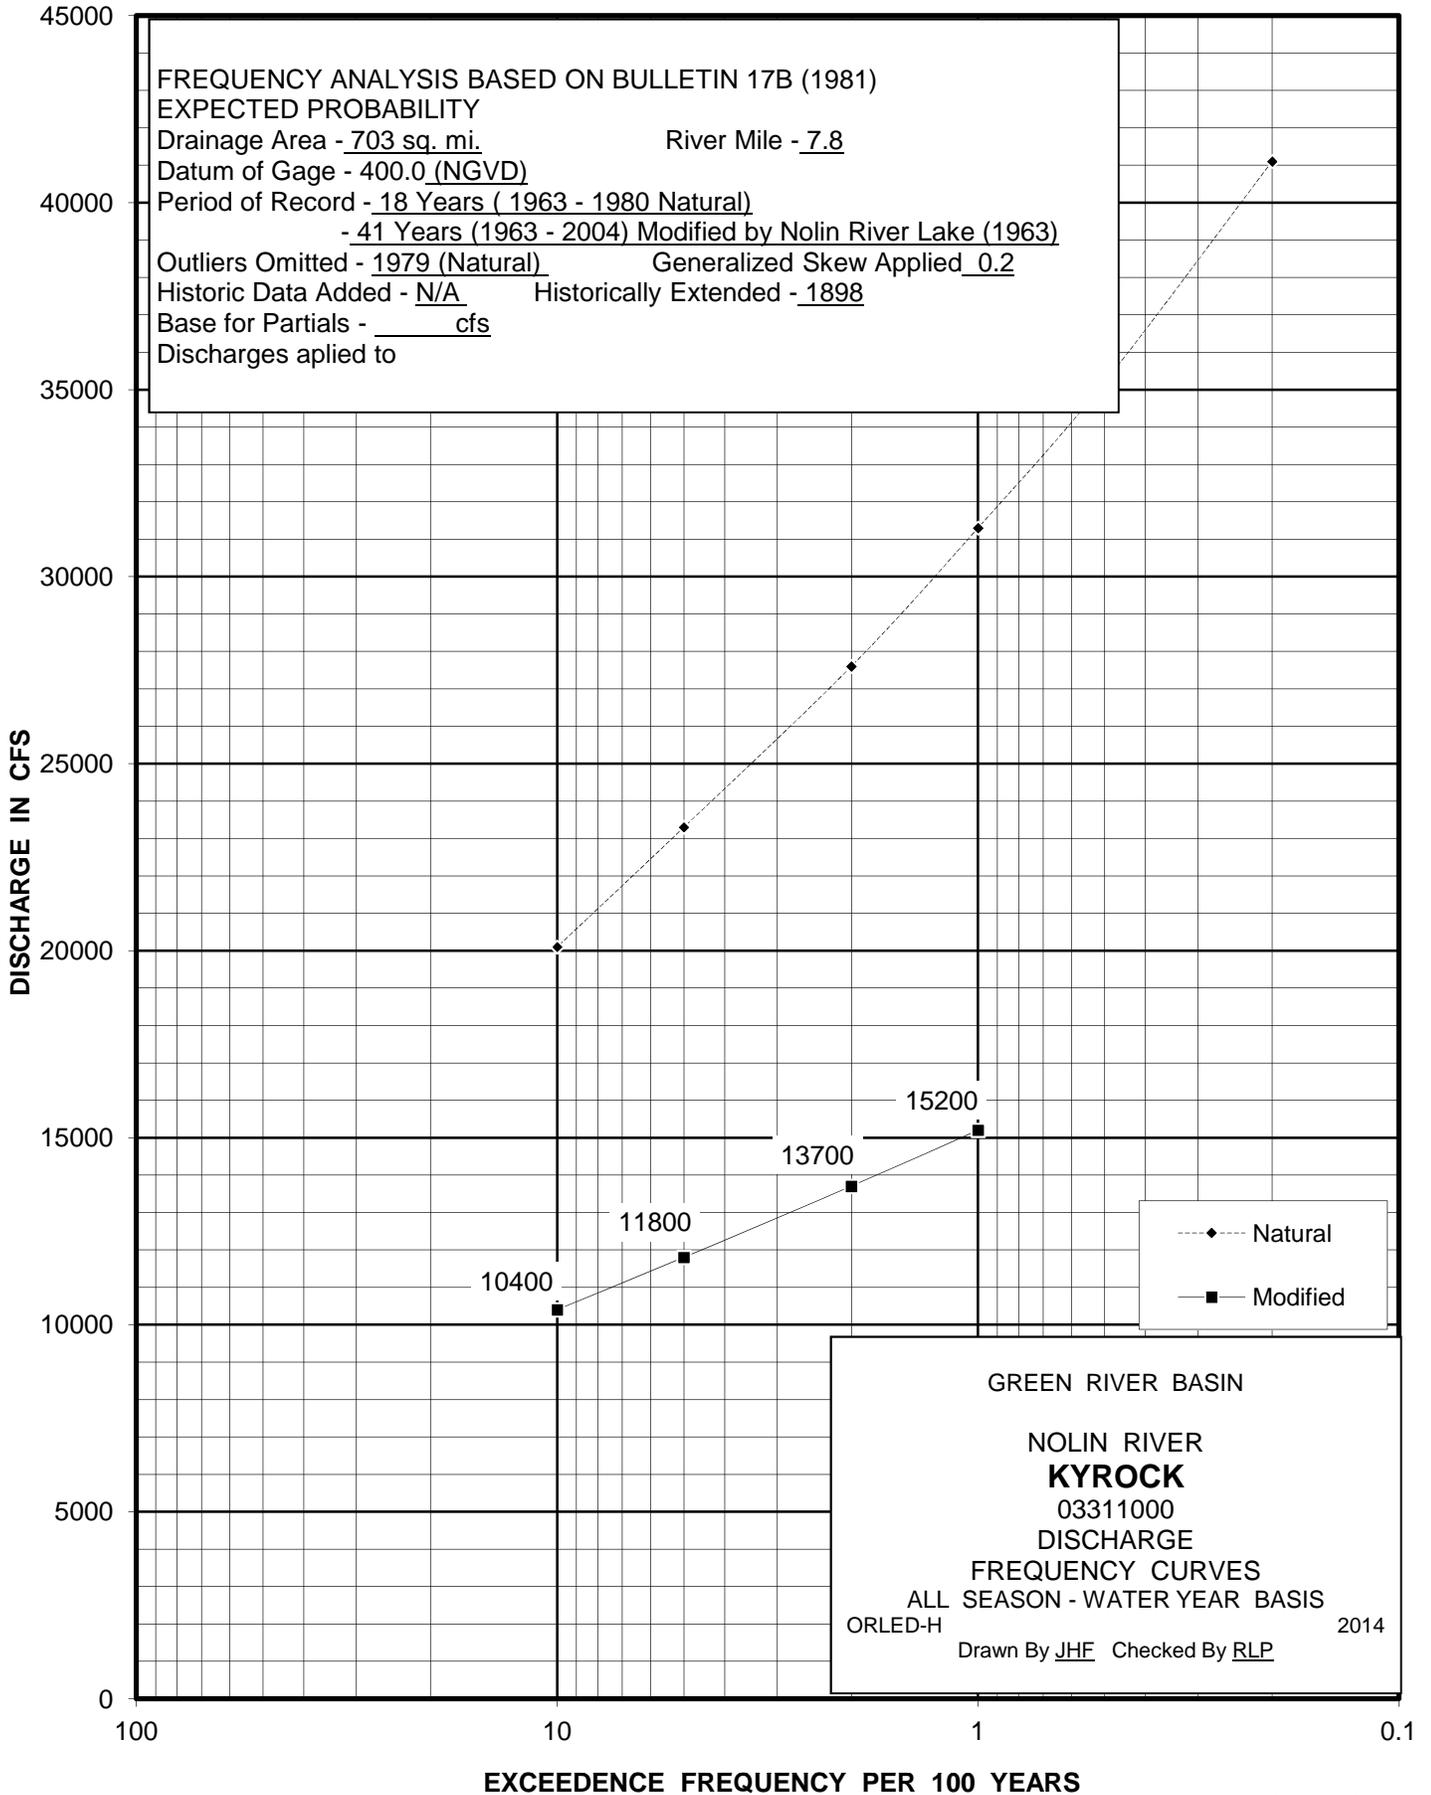




# GREEN RIVER AT BROWNSVILLE ( LOCK 6 ), KY.

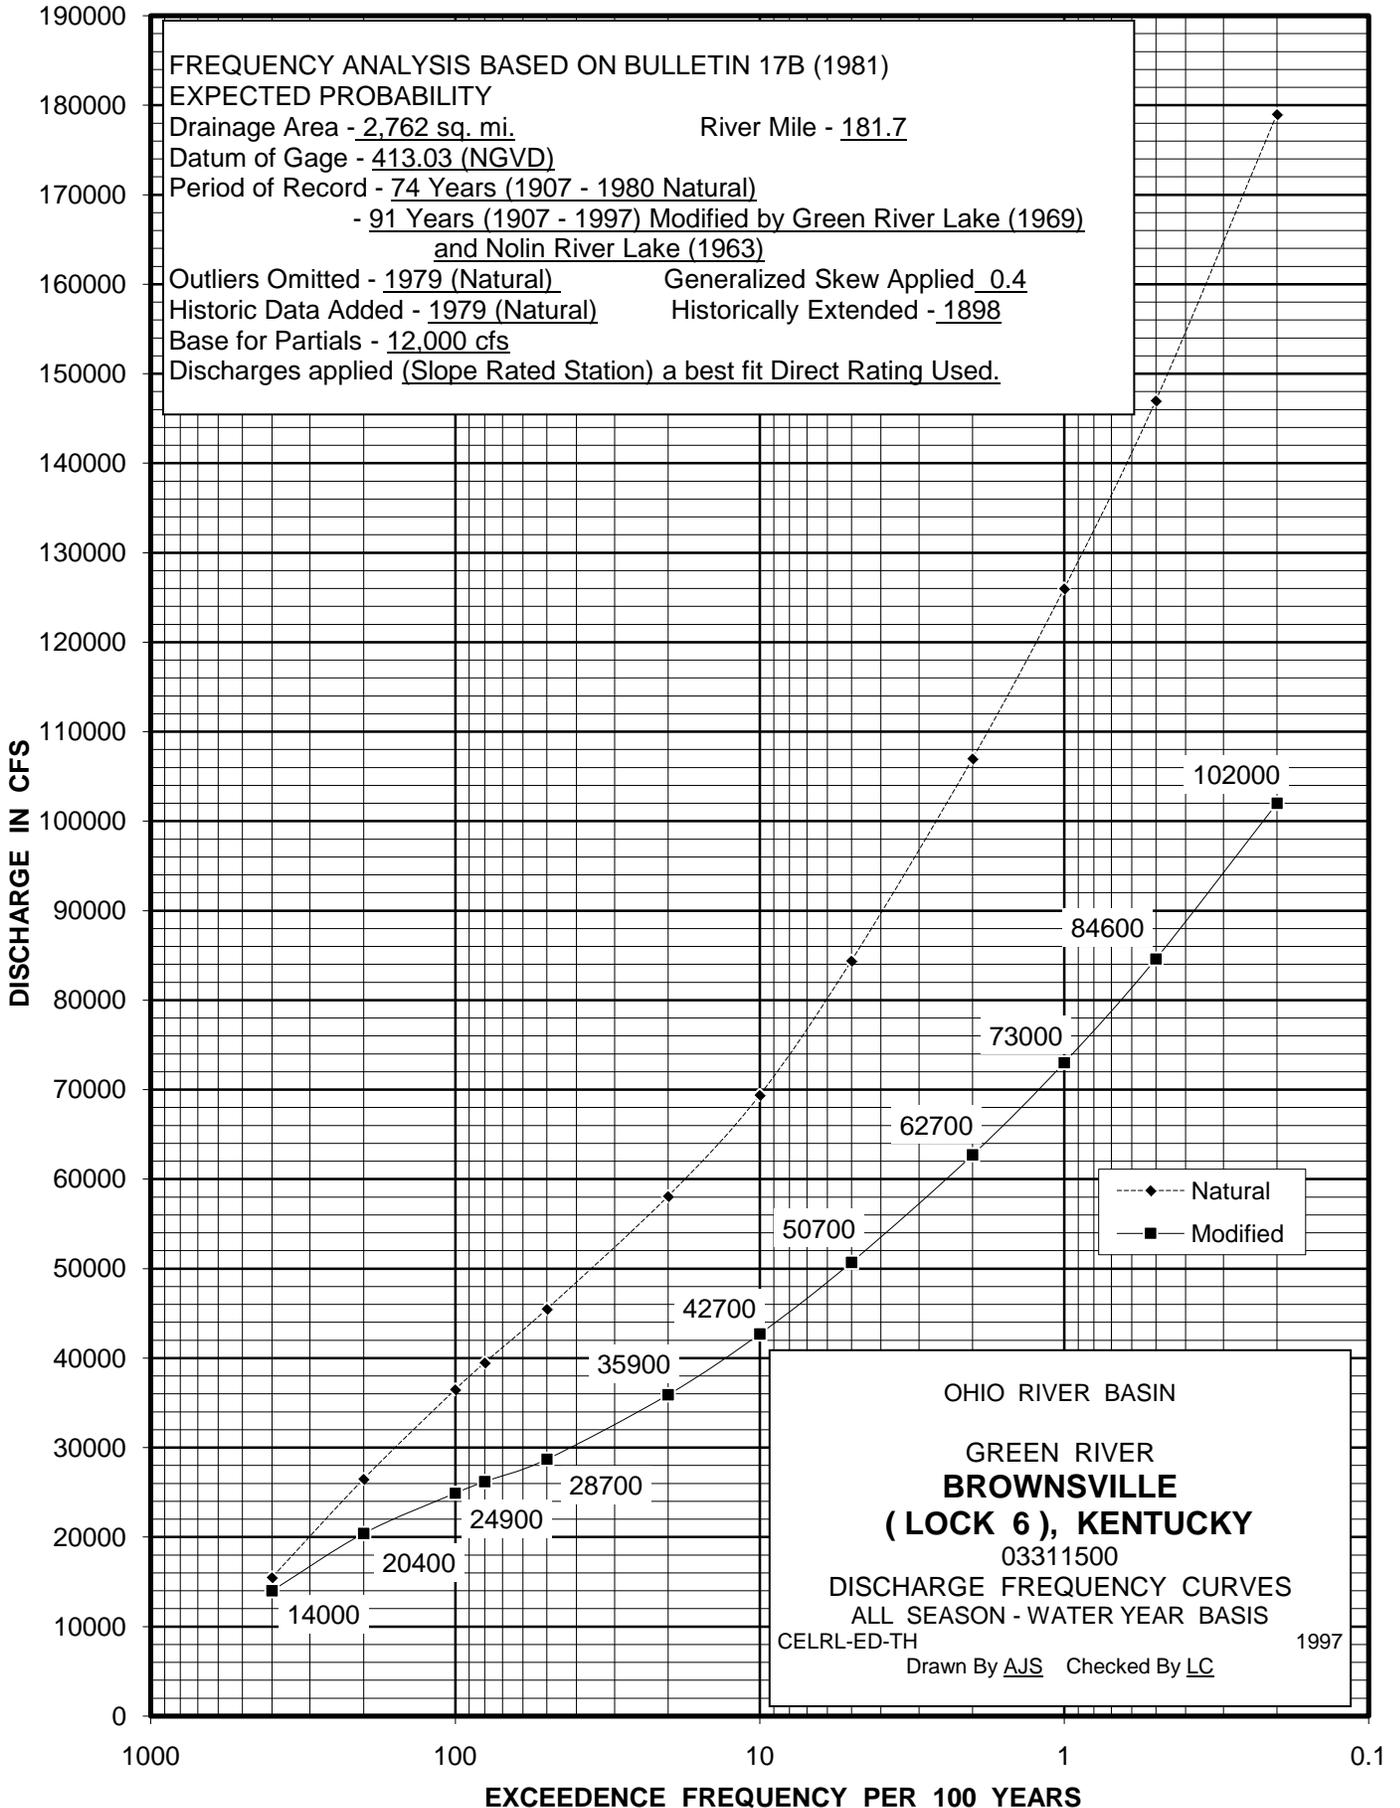

# GREEN RIVER AT BROWNSVILLE ( LOCK 6 ), KY.

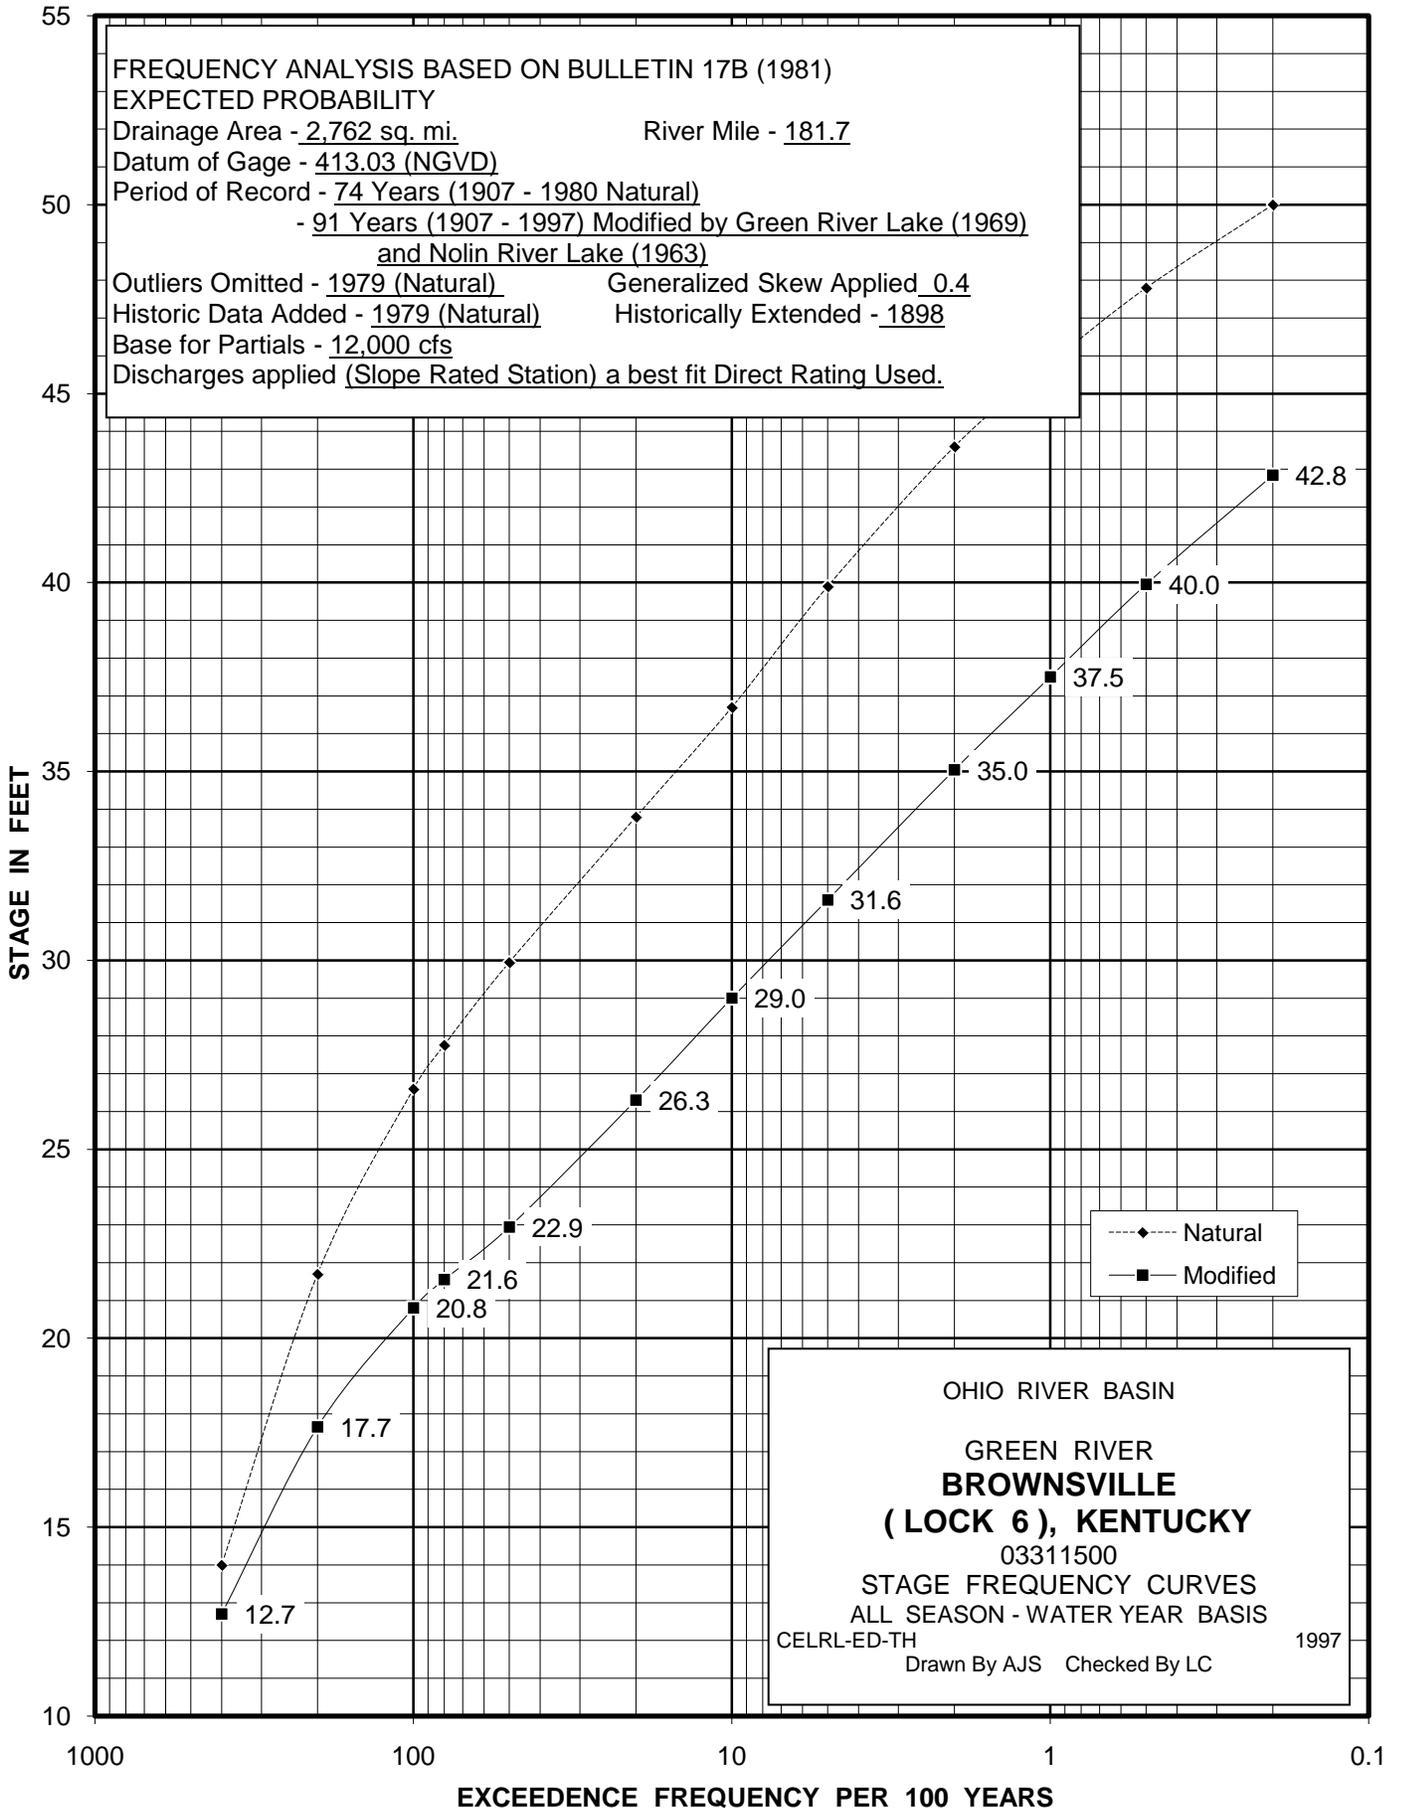










# GREEN RIVER AT PARADISE, KY.

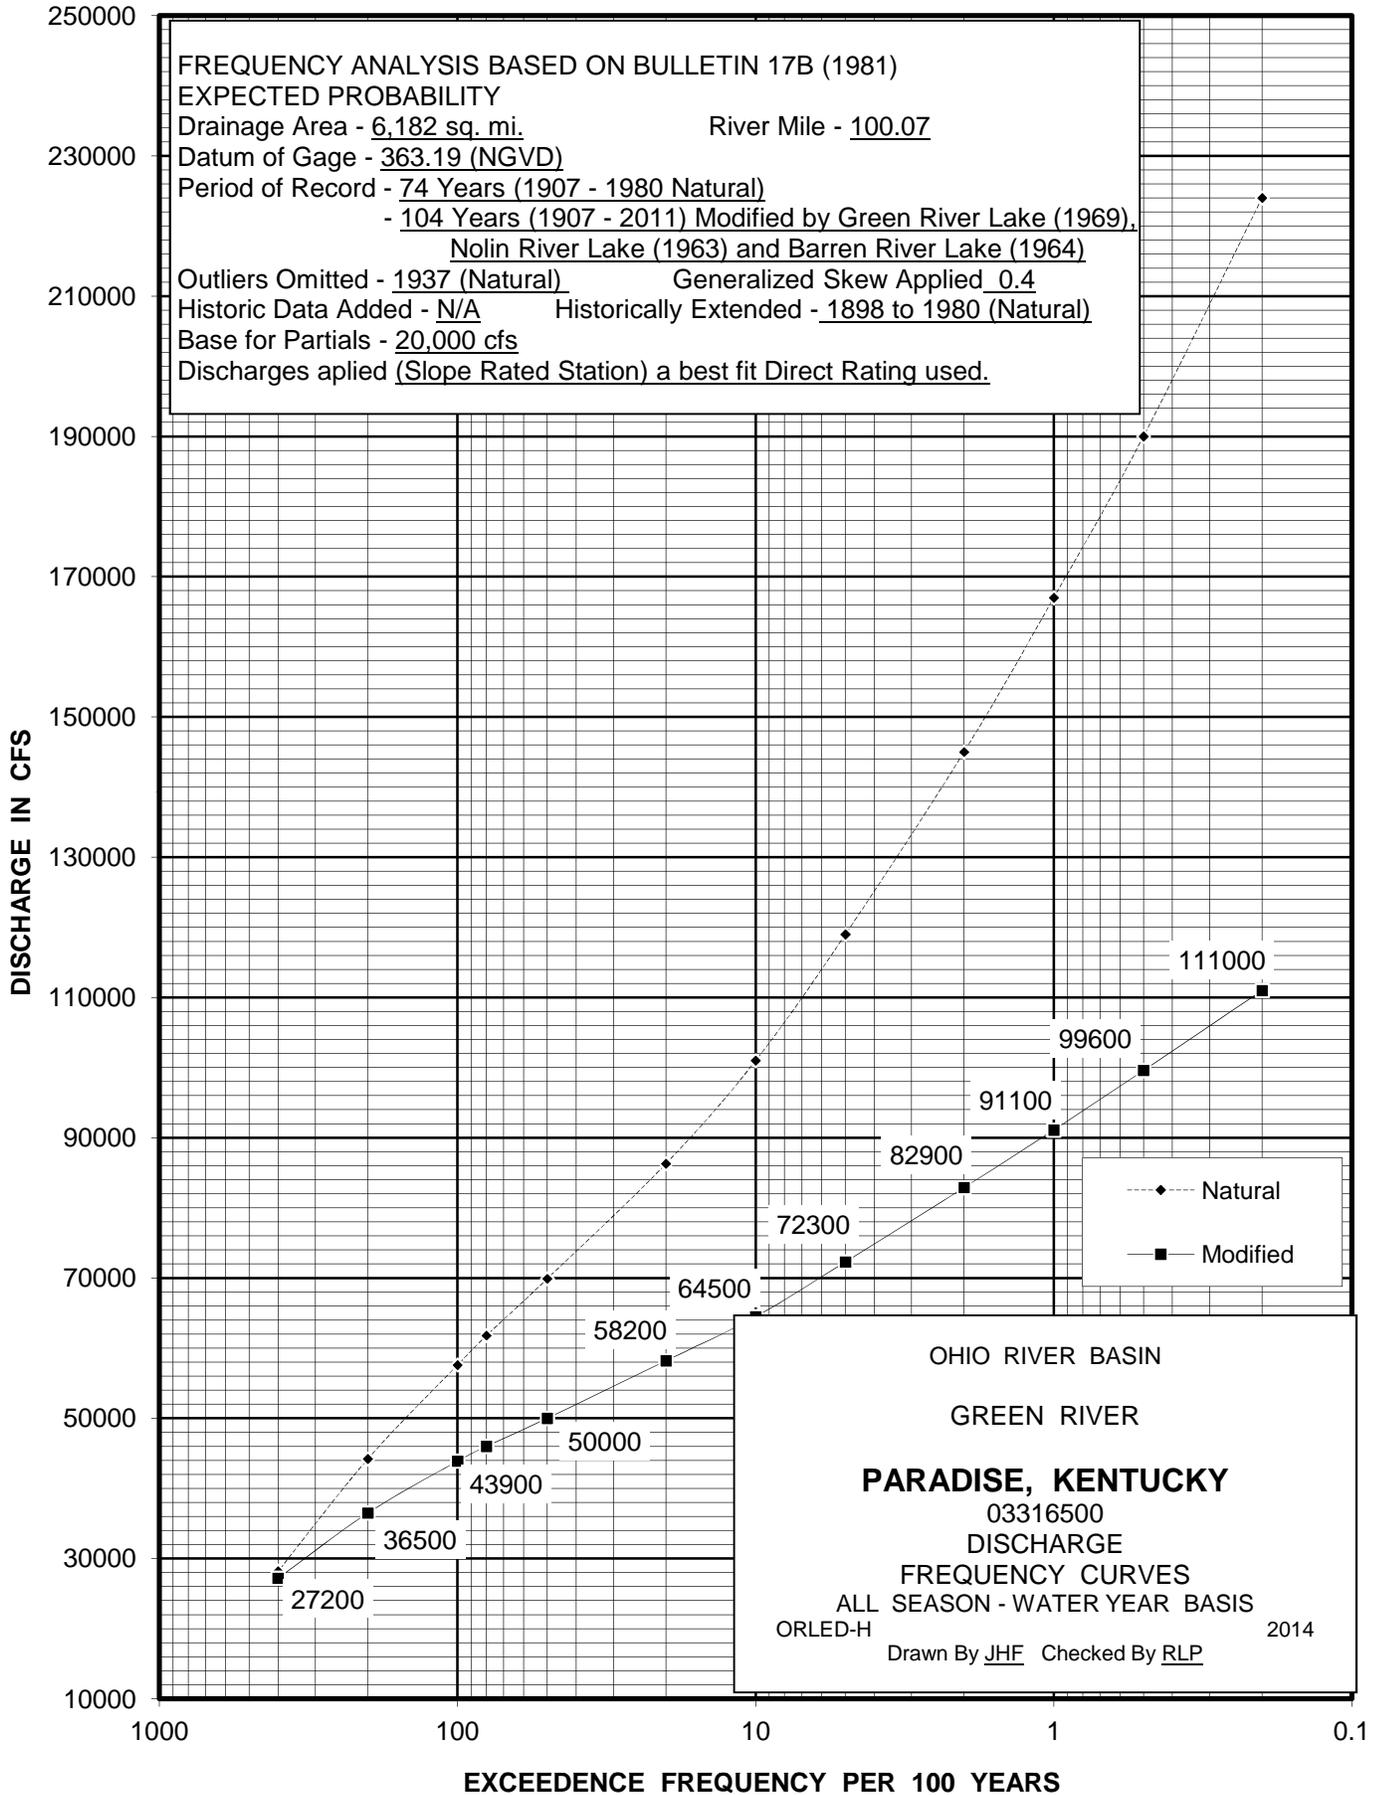











# GREEN RIVER AT CALHOUN ( LOCK 2 ), KY.

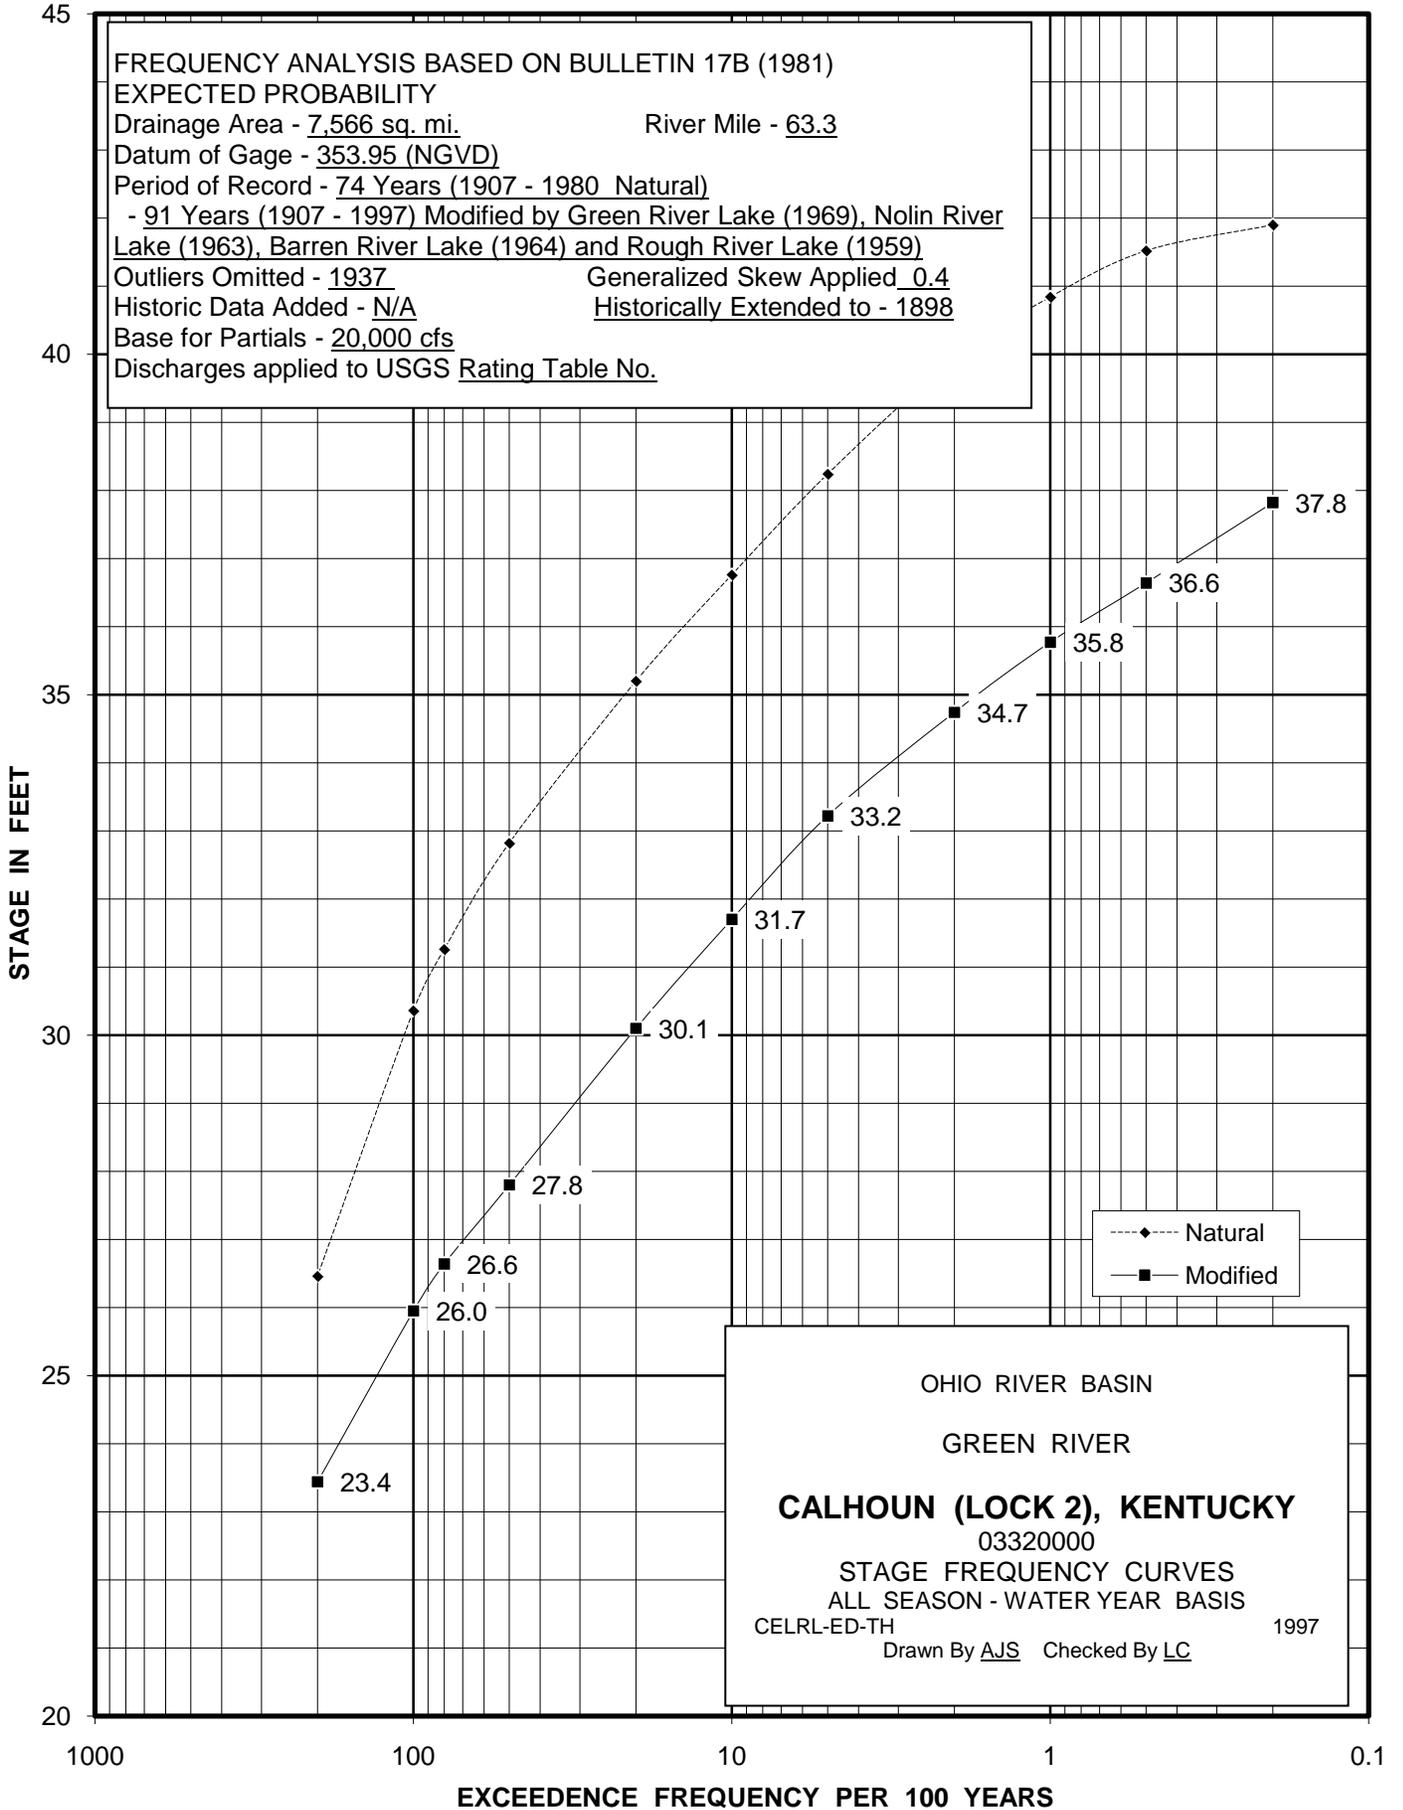


# GREEN RIVER - KENTUCKY

## EXISTING CONDITION -- PERCENT CHANCE EXCEEDENCE FLOODS

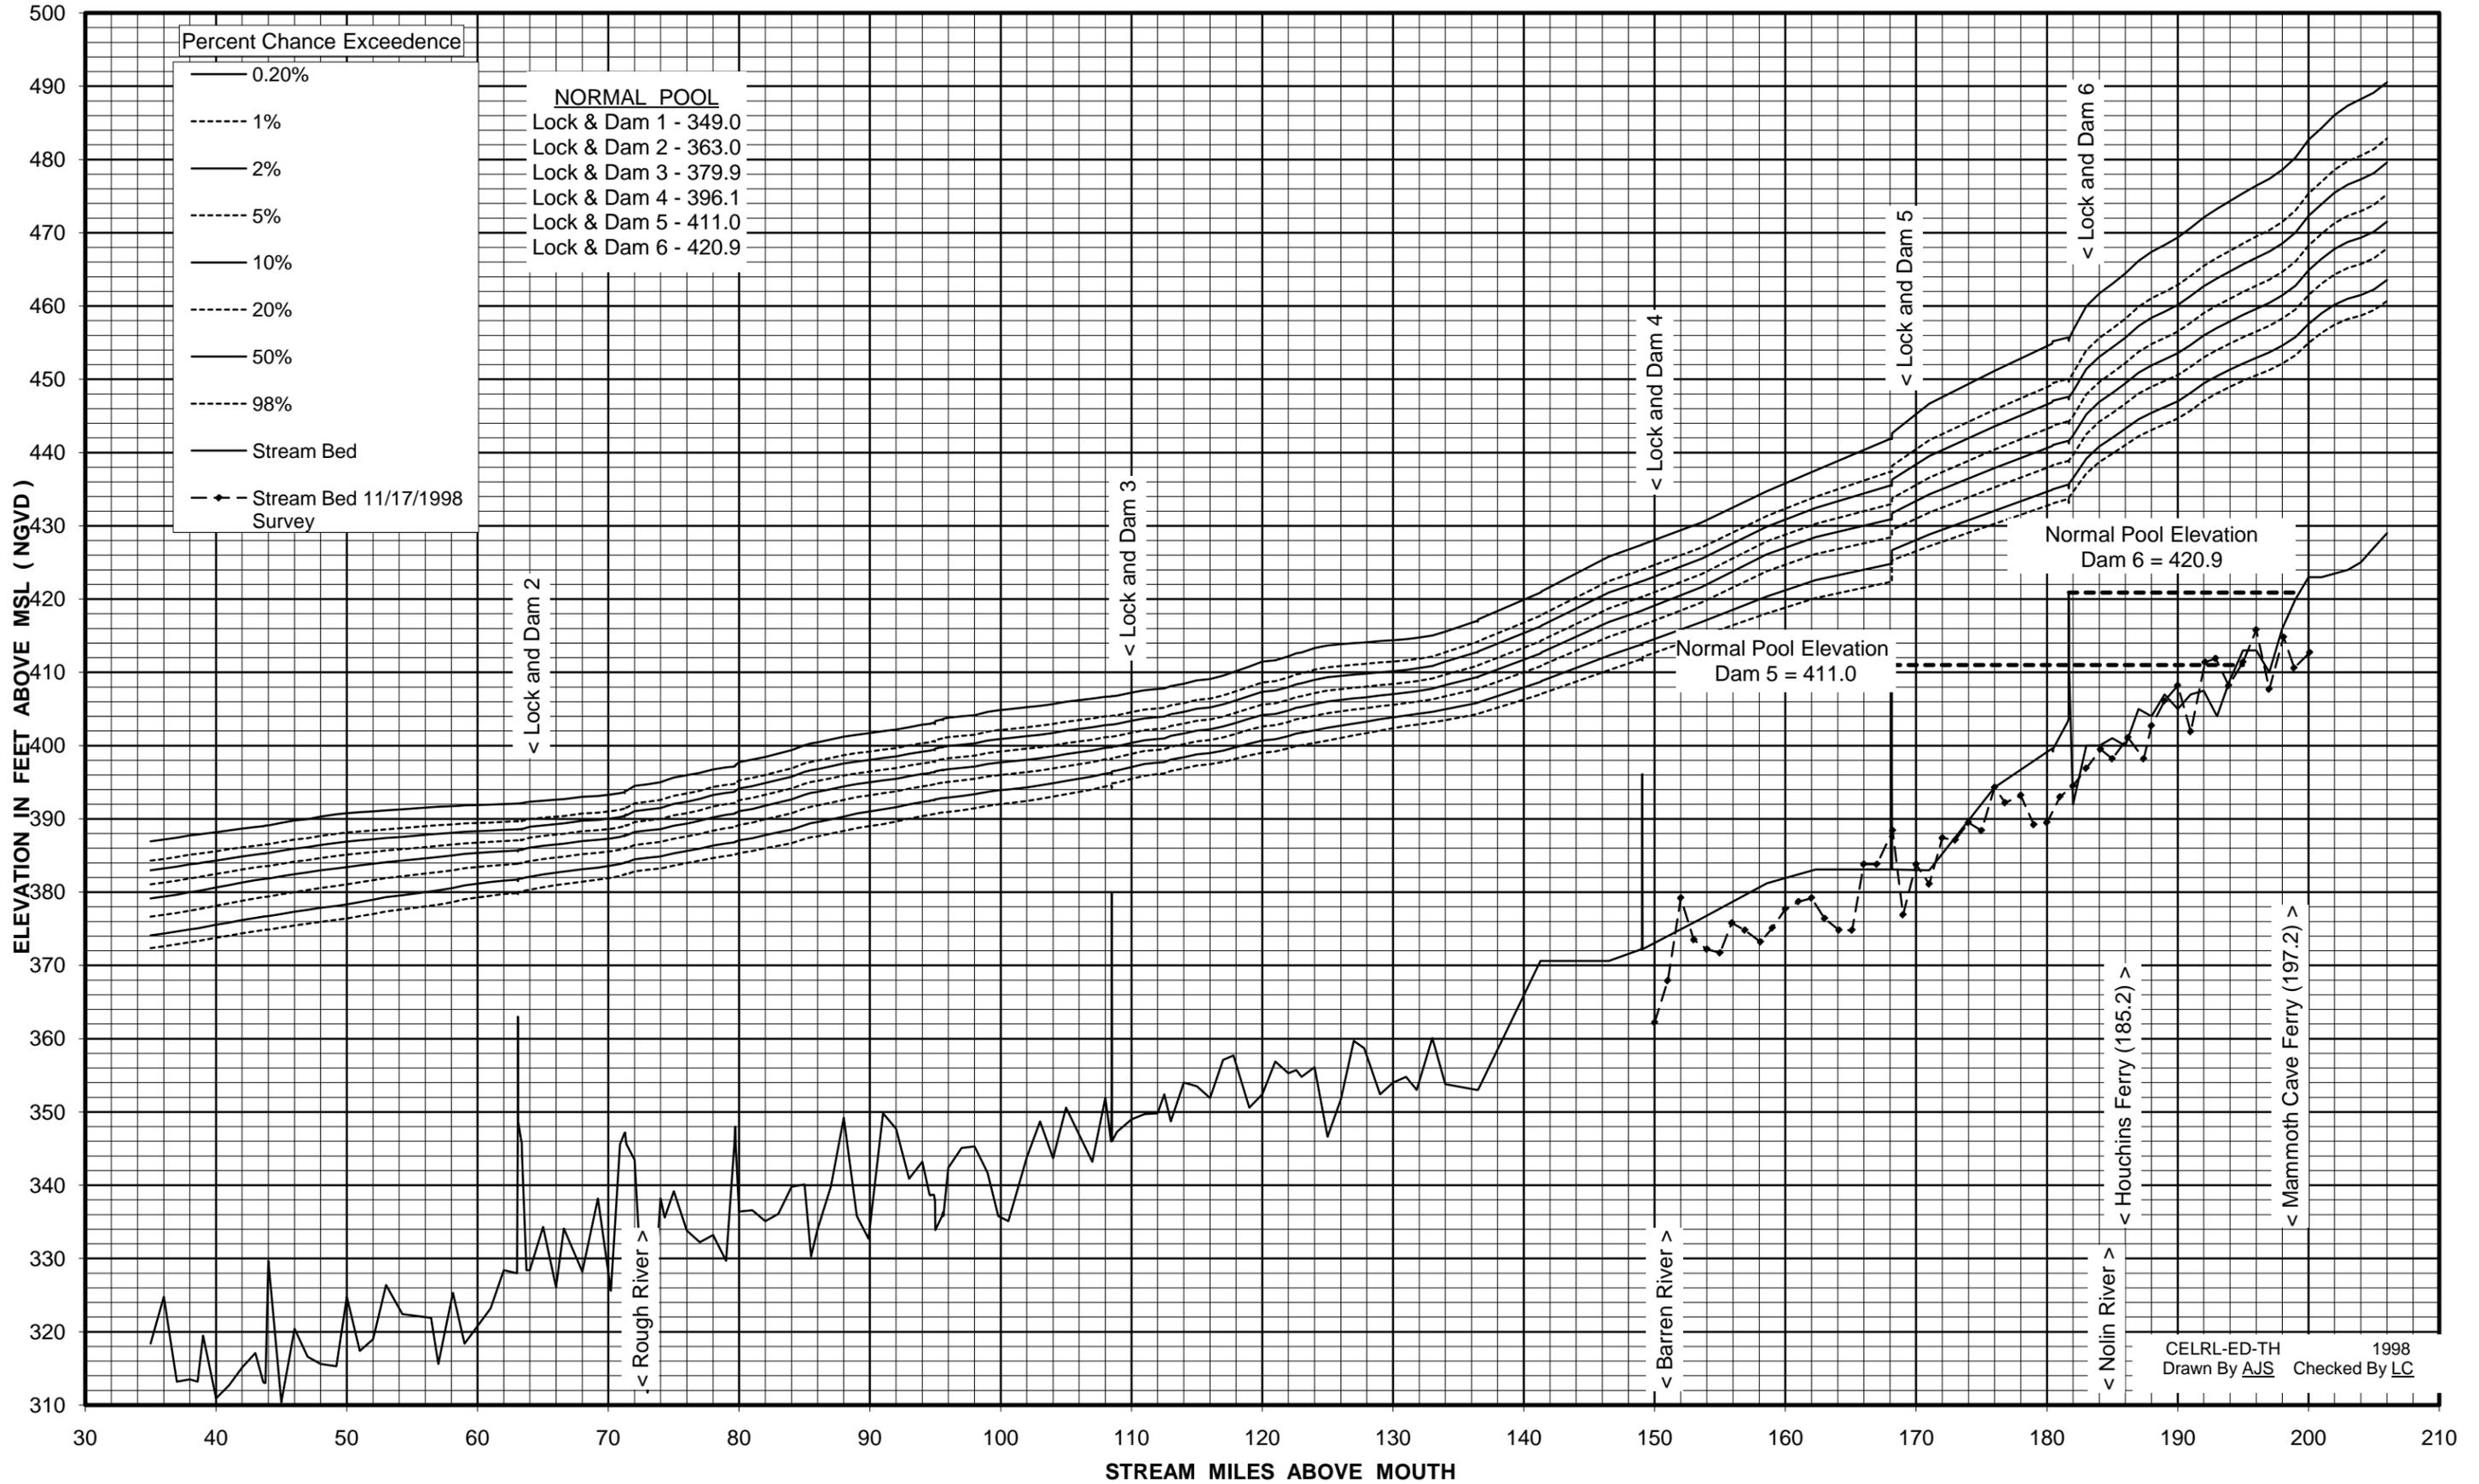


CELRL-ED-TH 1998  
 Drawn By AJS Checked By LC

**BARREN RIVER - KENTUCKY**  
**EXISTING CONDITIONS - PERCENT CHANCE EXCEEDENCE FLOODS**

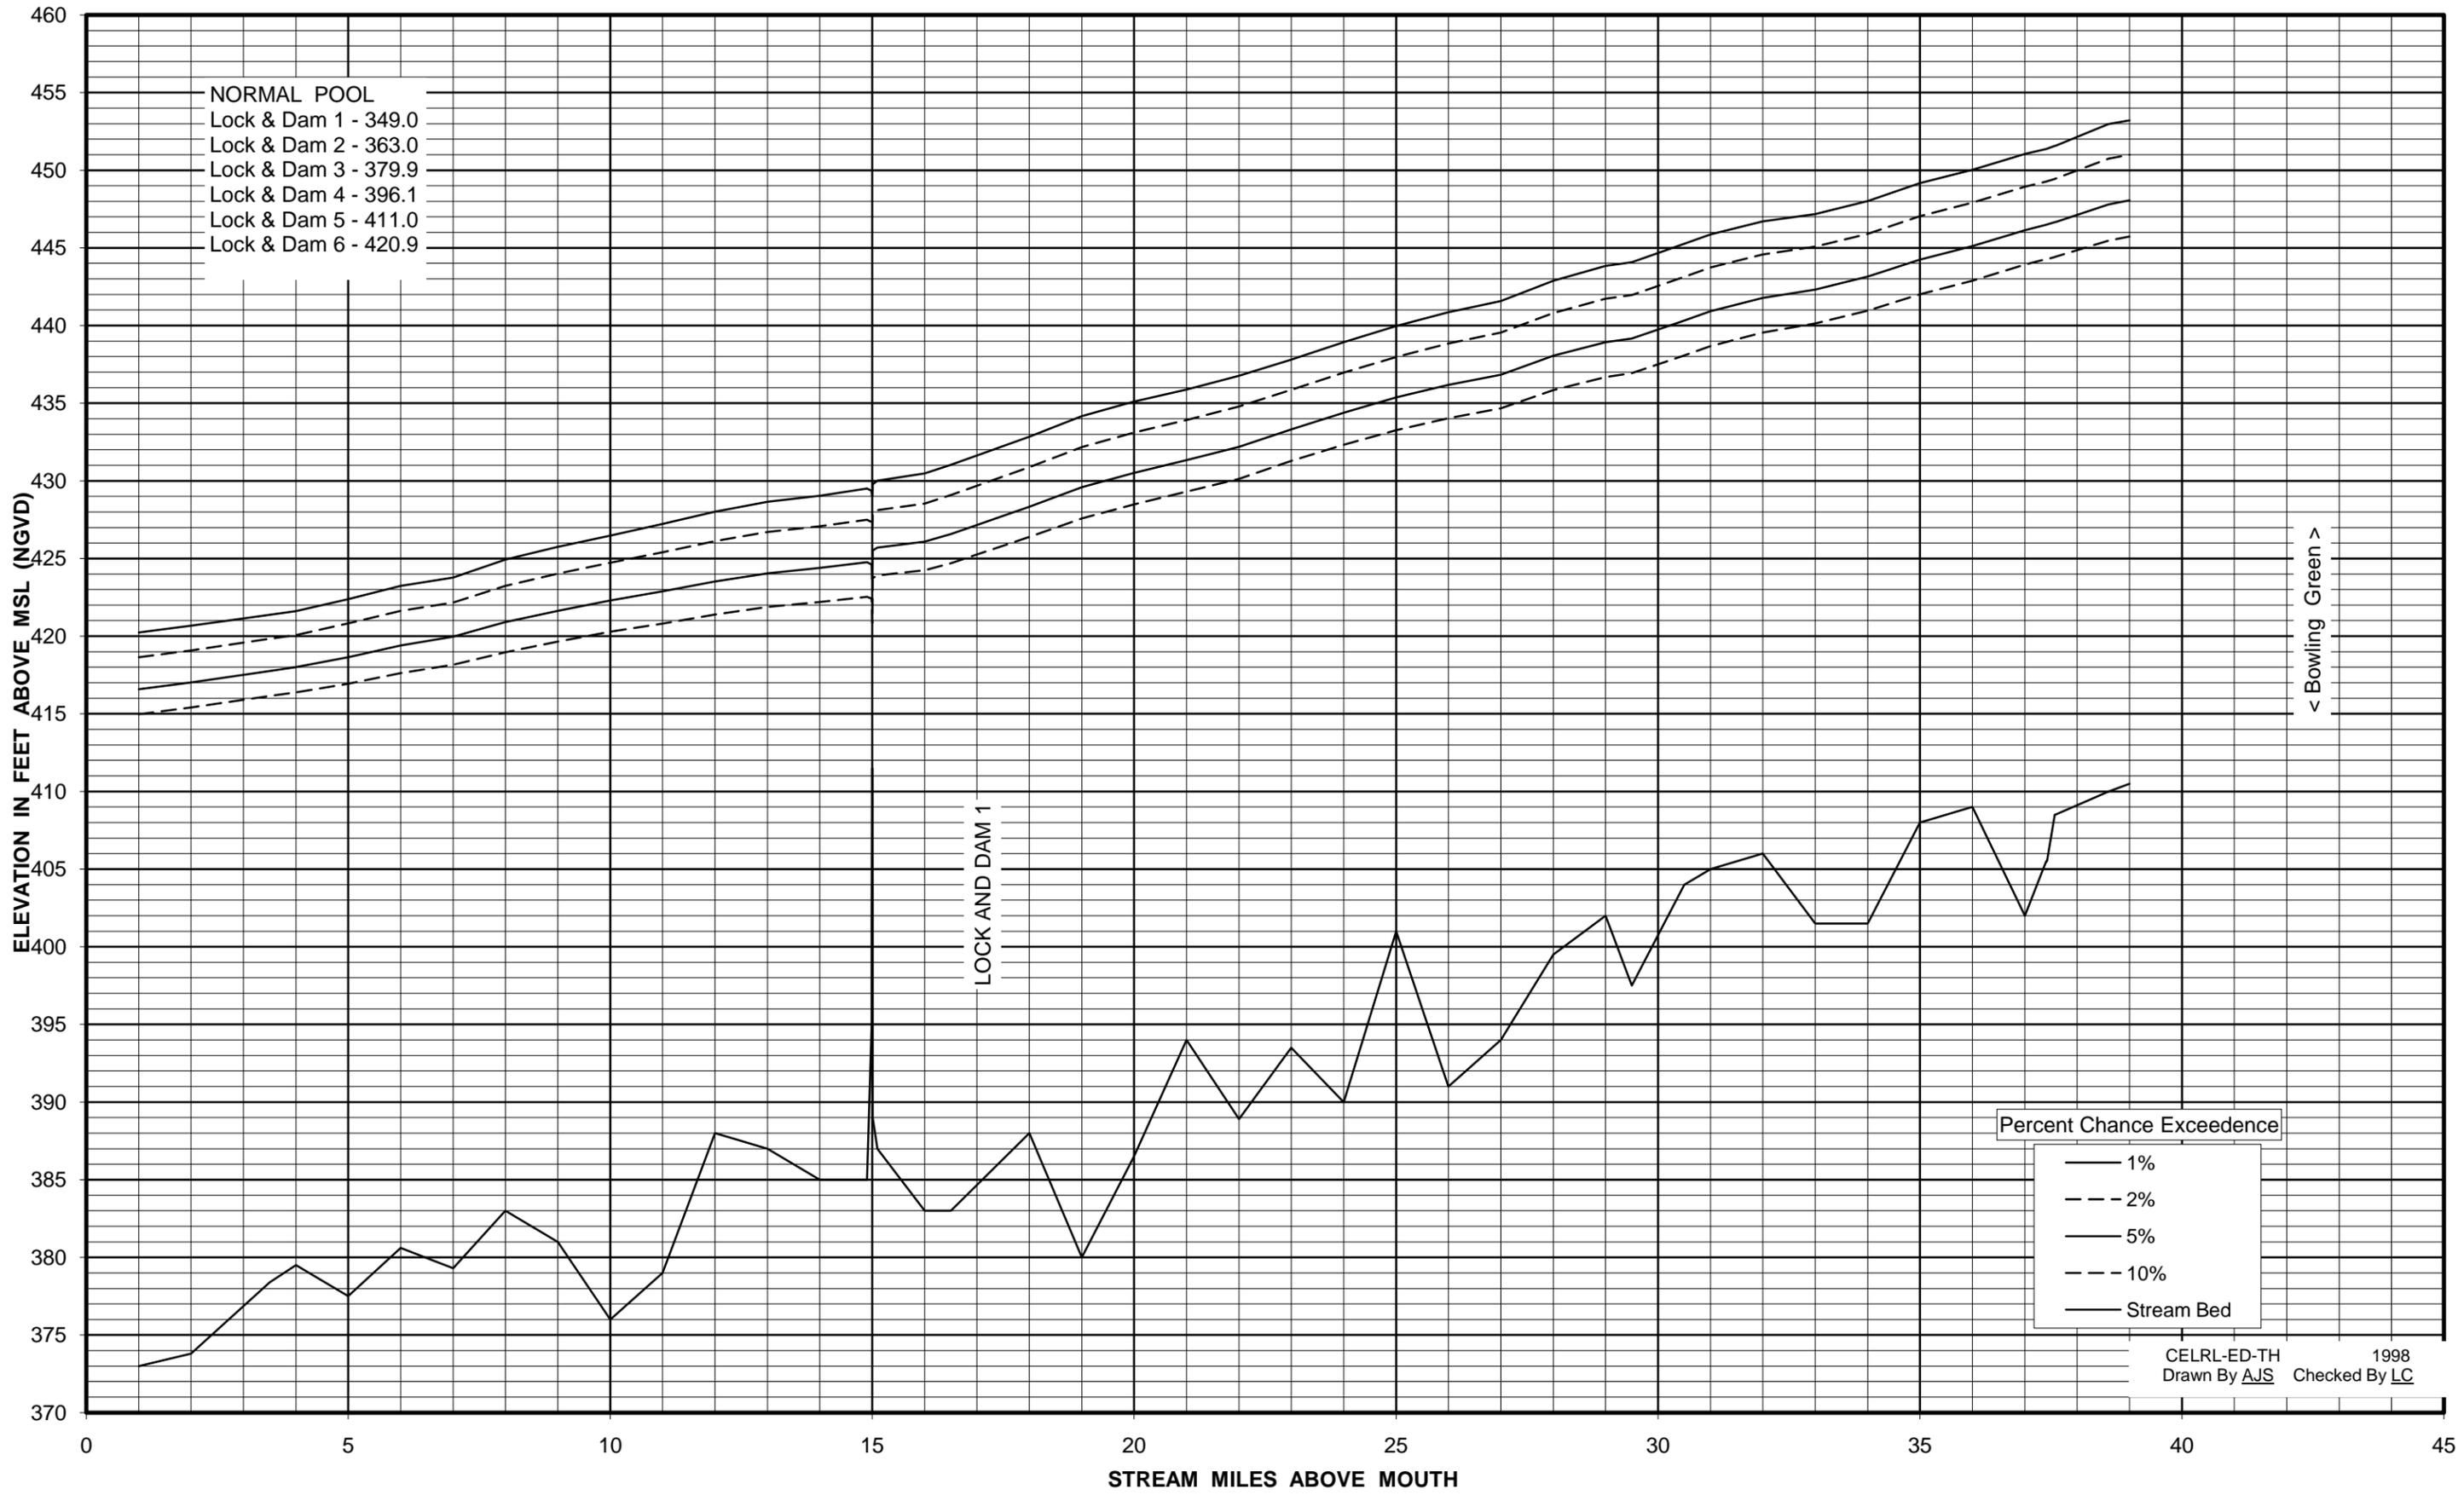


CELRL-ED-TH 1998  
 Drawn By AJS Checked By LC

**GREEN RIVER - KENTUCKY**  
**DESIGN CONDITIONS - ALL LOCKS AND DAMS IN PLACE**

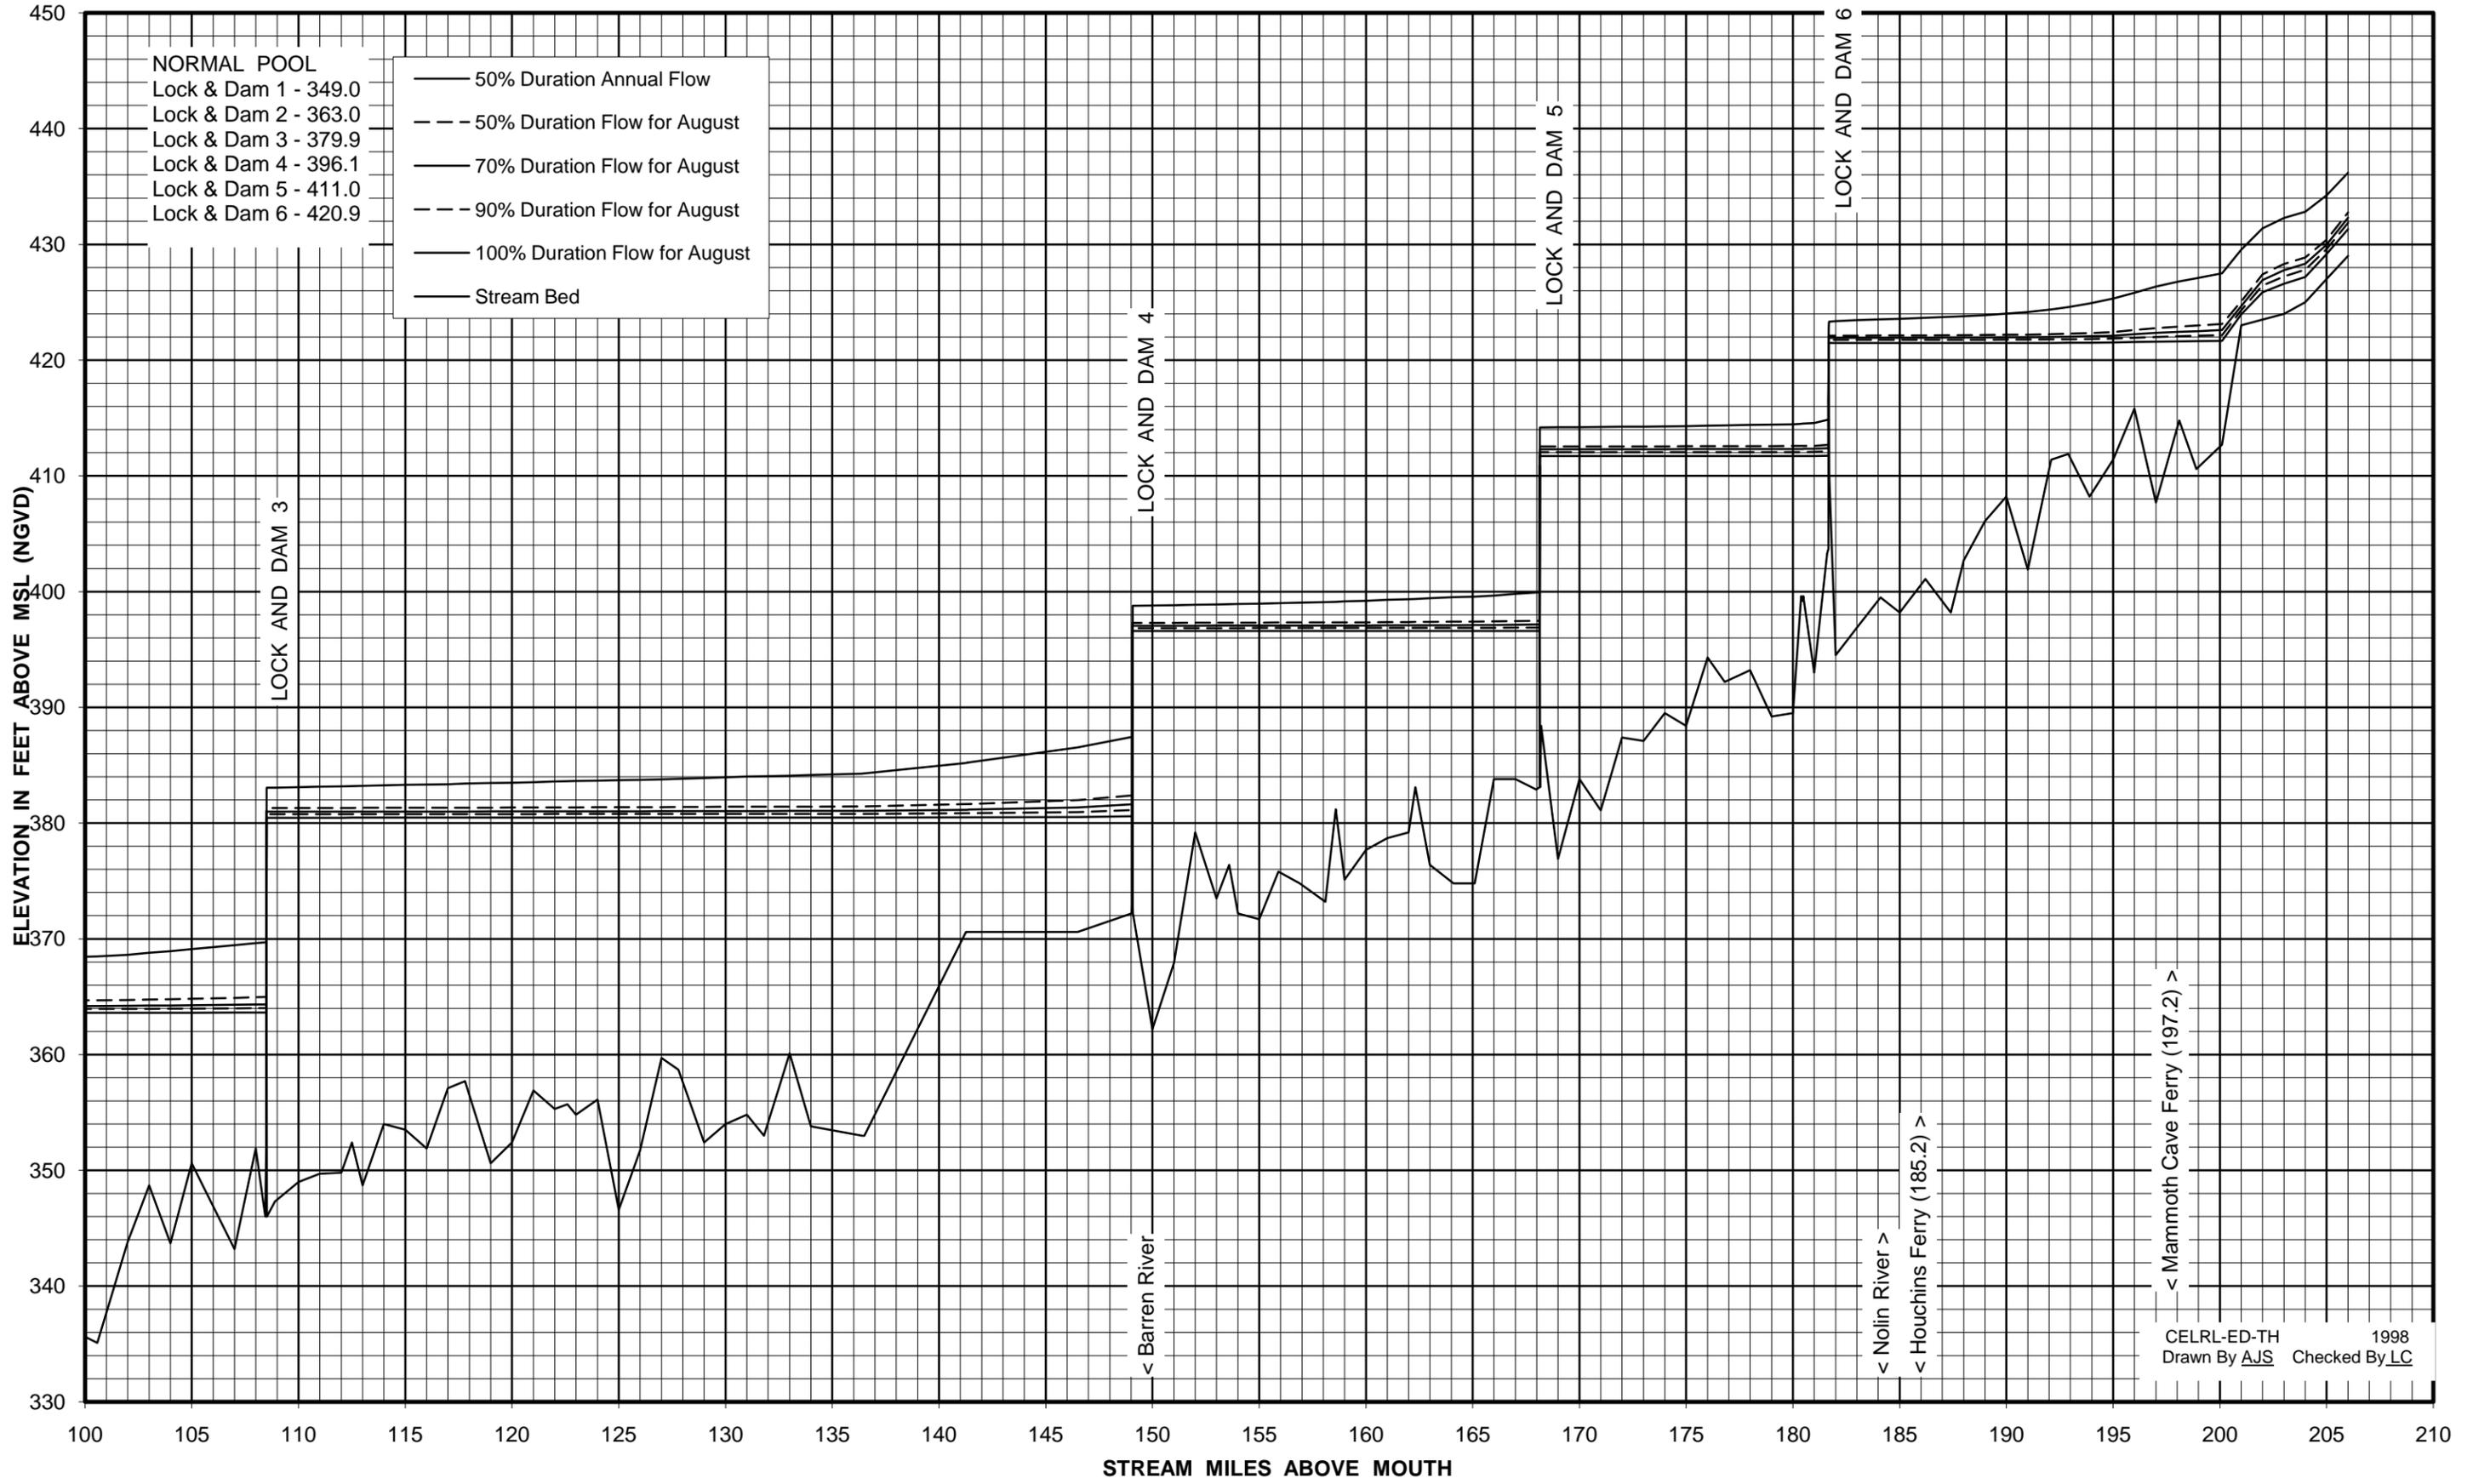


CELRL-ED-TH 1998  
 Drawn By AJS Checked By LC

**GREEN RIVER - KENTUCKY**  
**ESTIMATED EXISTING CONDITIONS (DAM 4 DETERIORATED)**

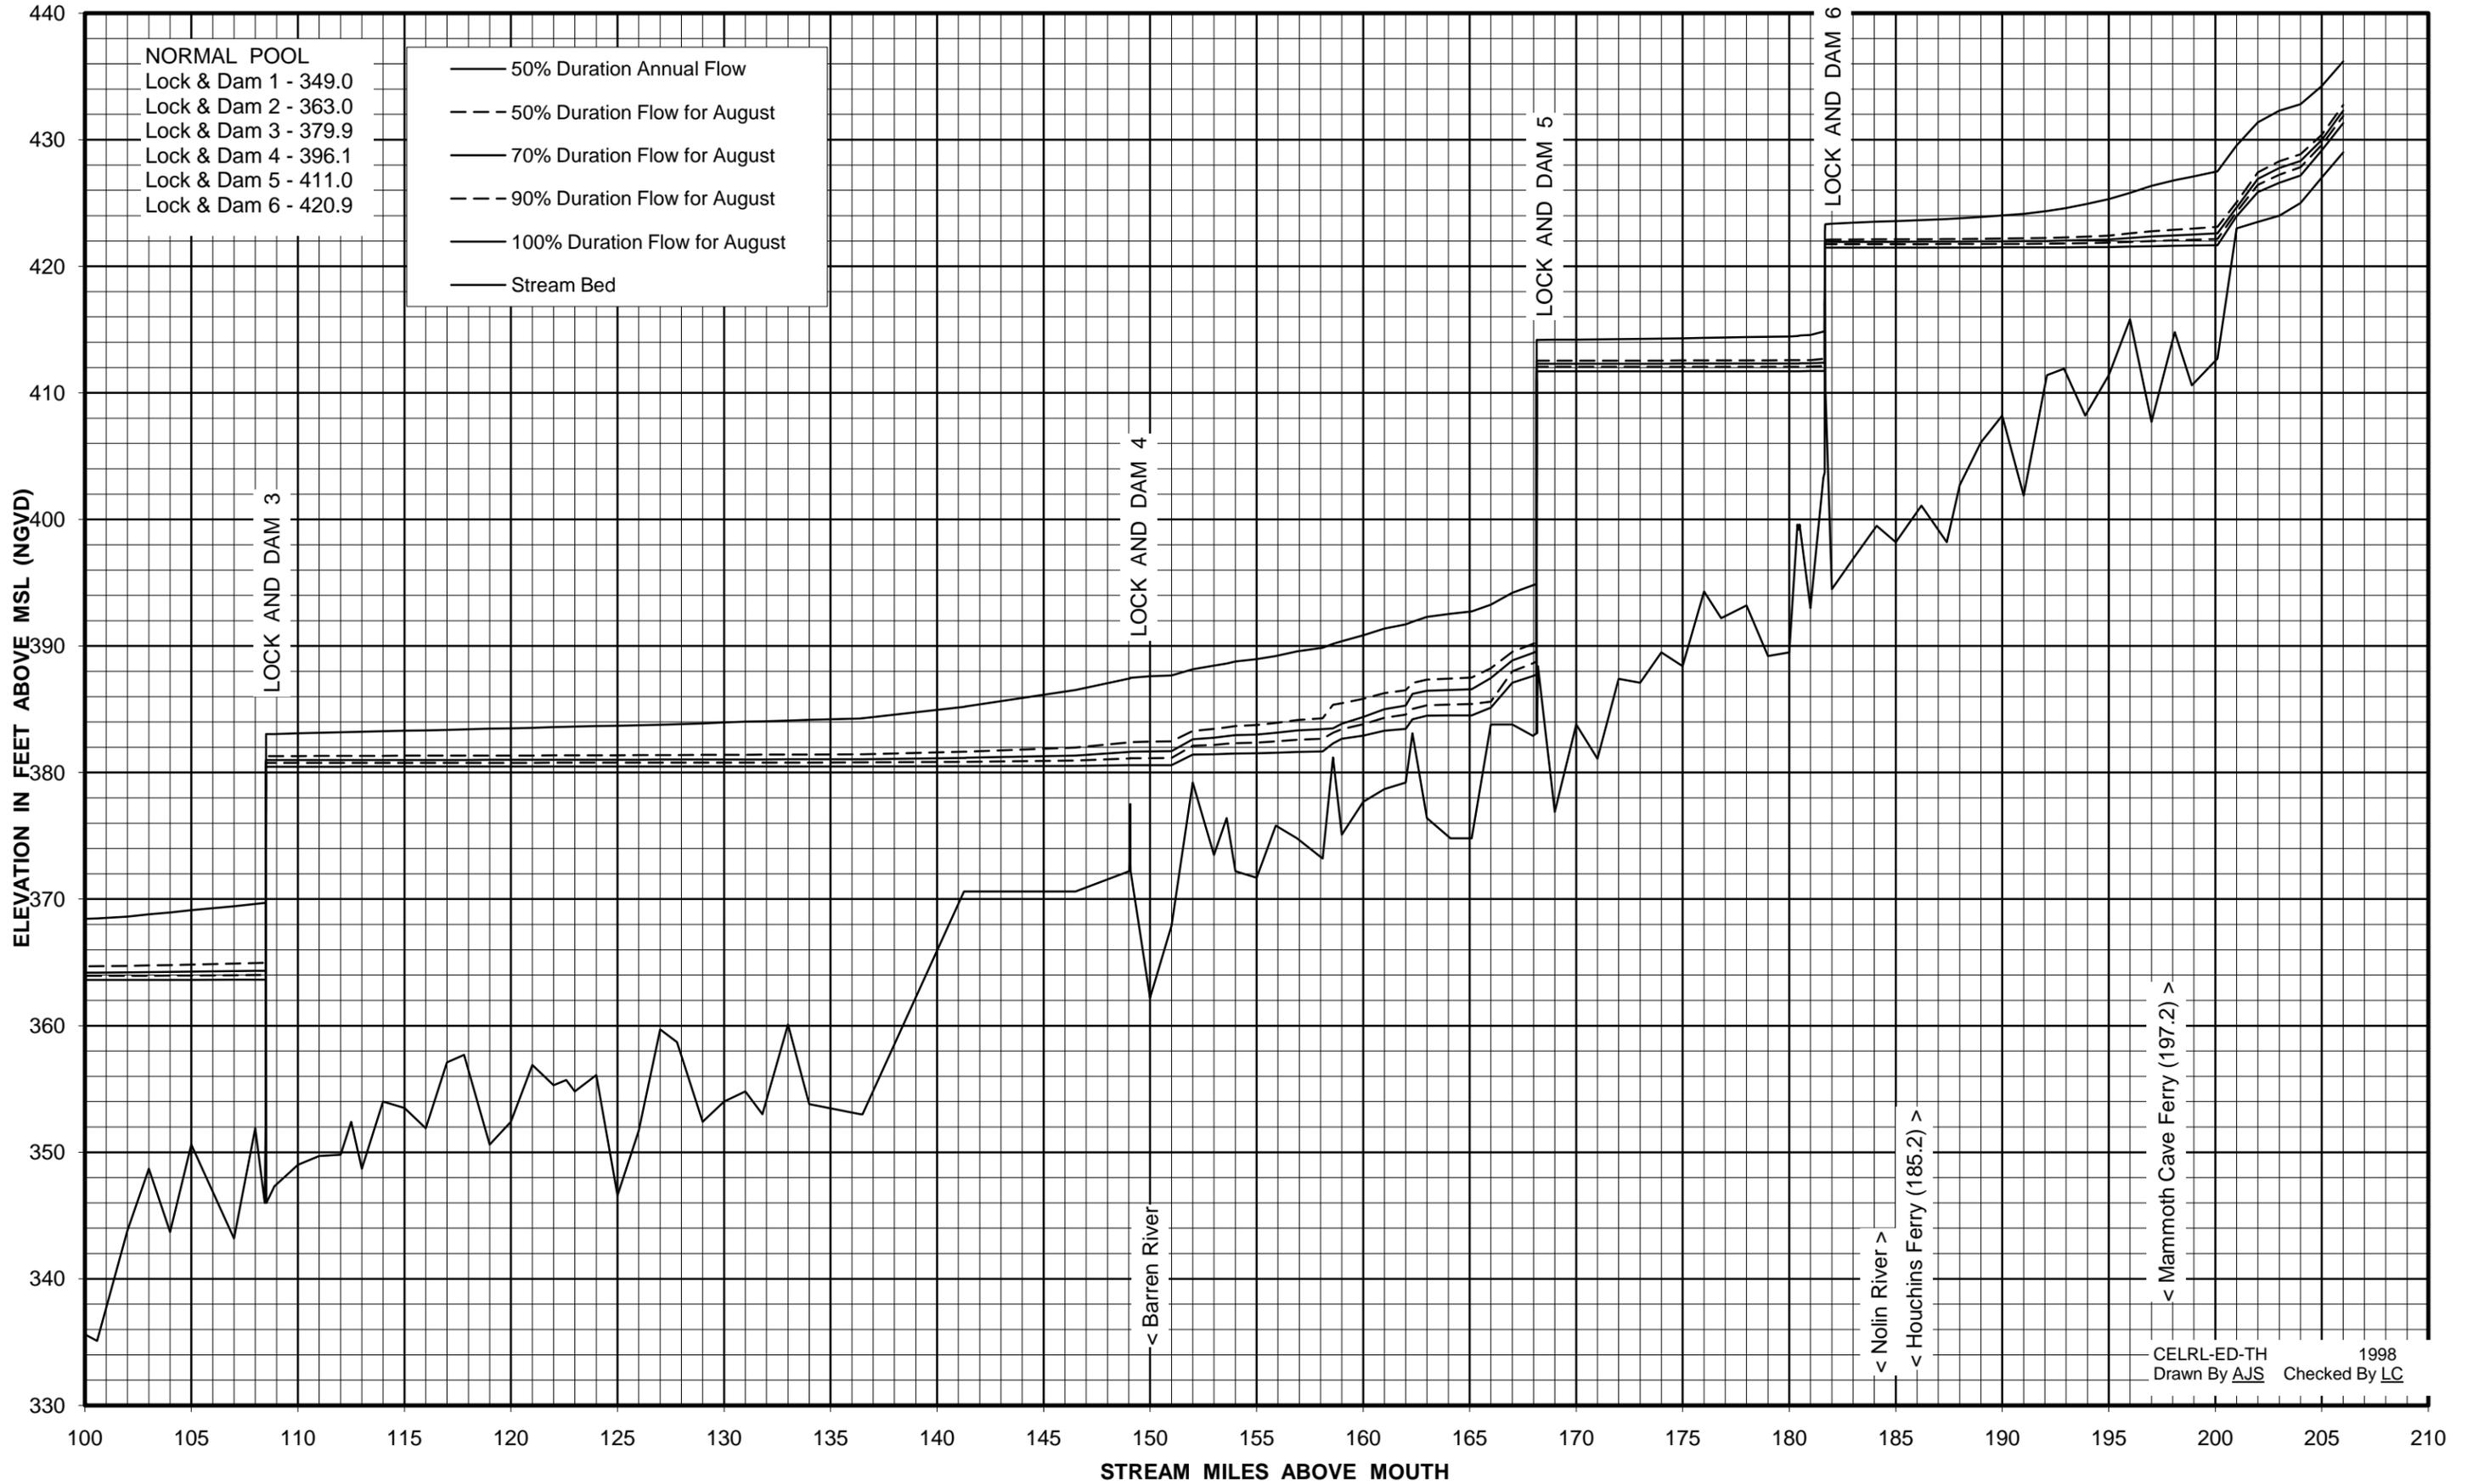


CELRL-ED-TH 1998  
 Drawn By AJS Checked By LC

**GREEN RIVER - KENTUCKY  
DAM 4 DETERIORATED AND DAM 6 REMOVED**

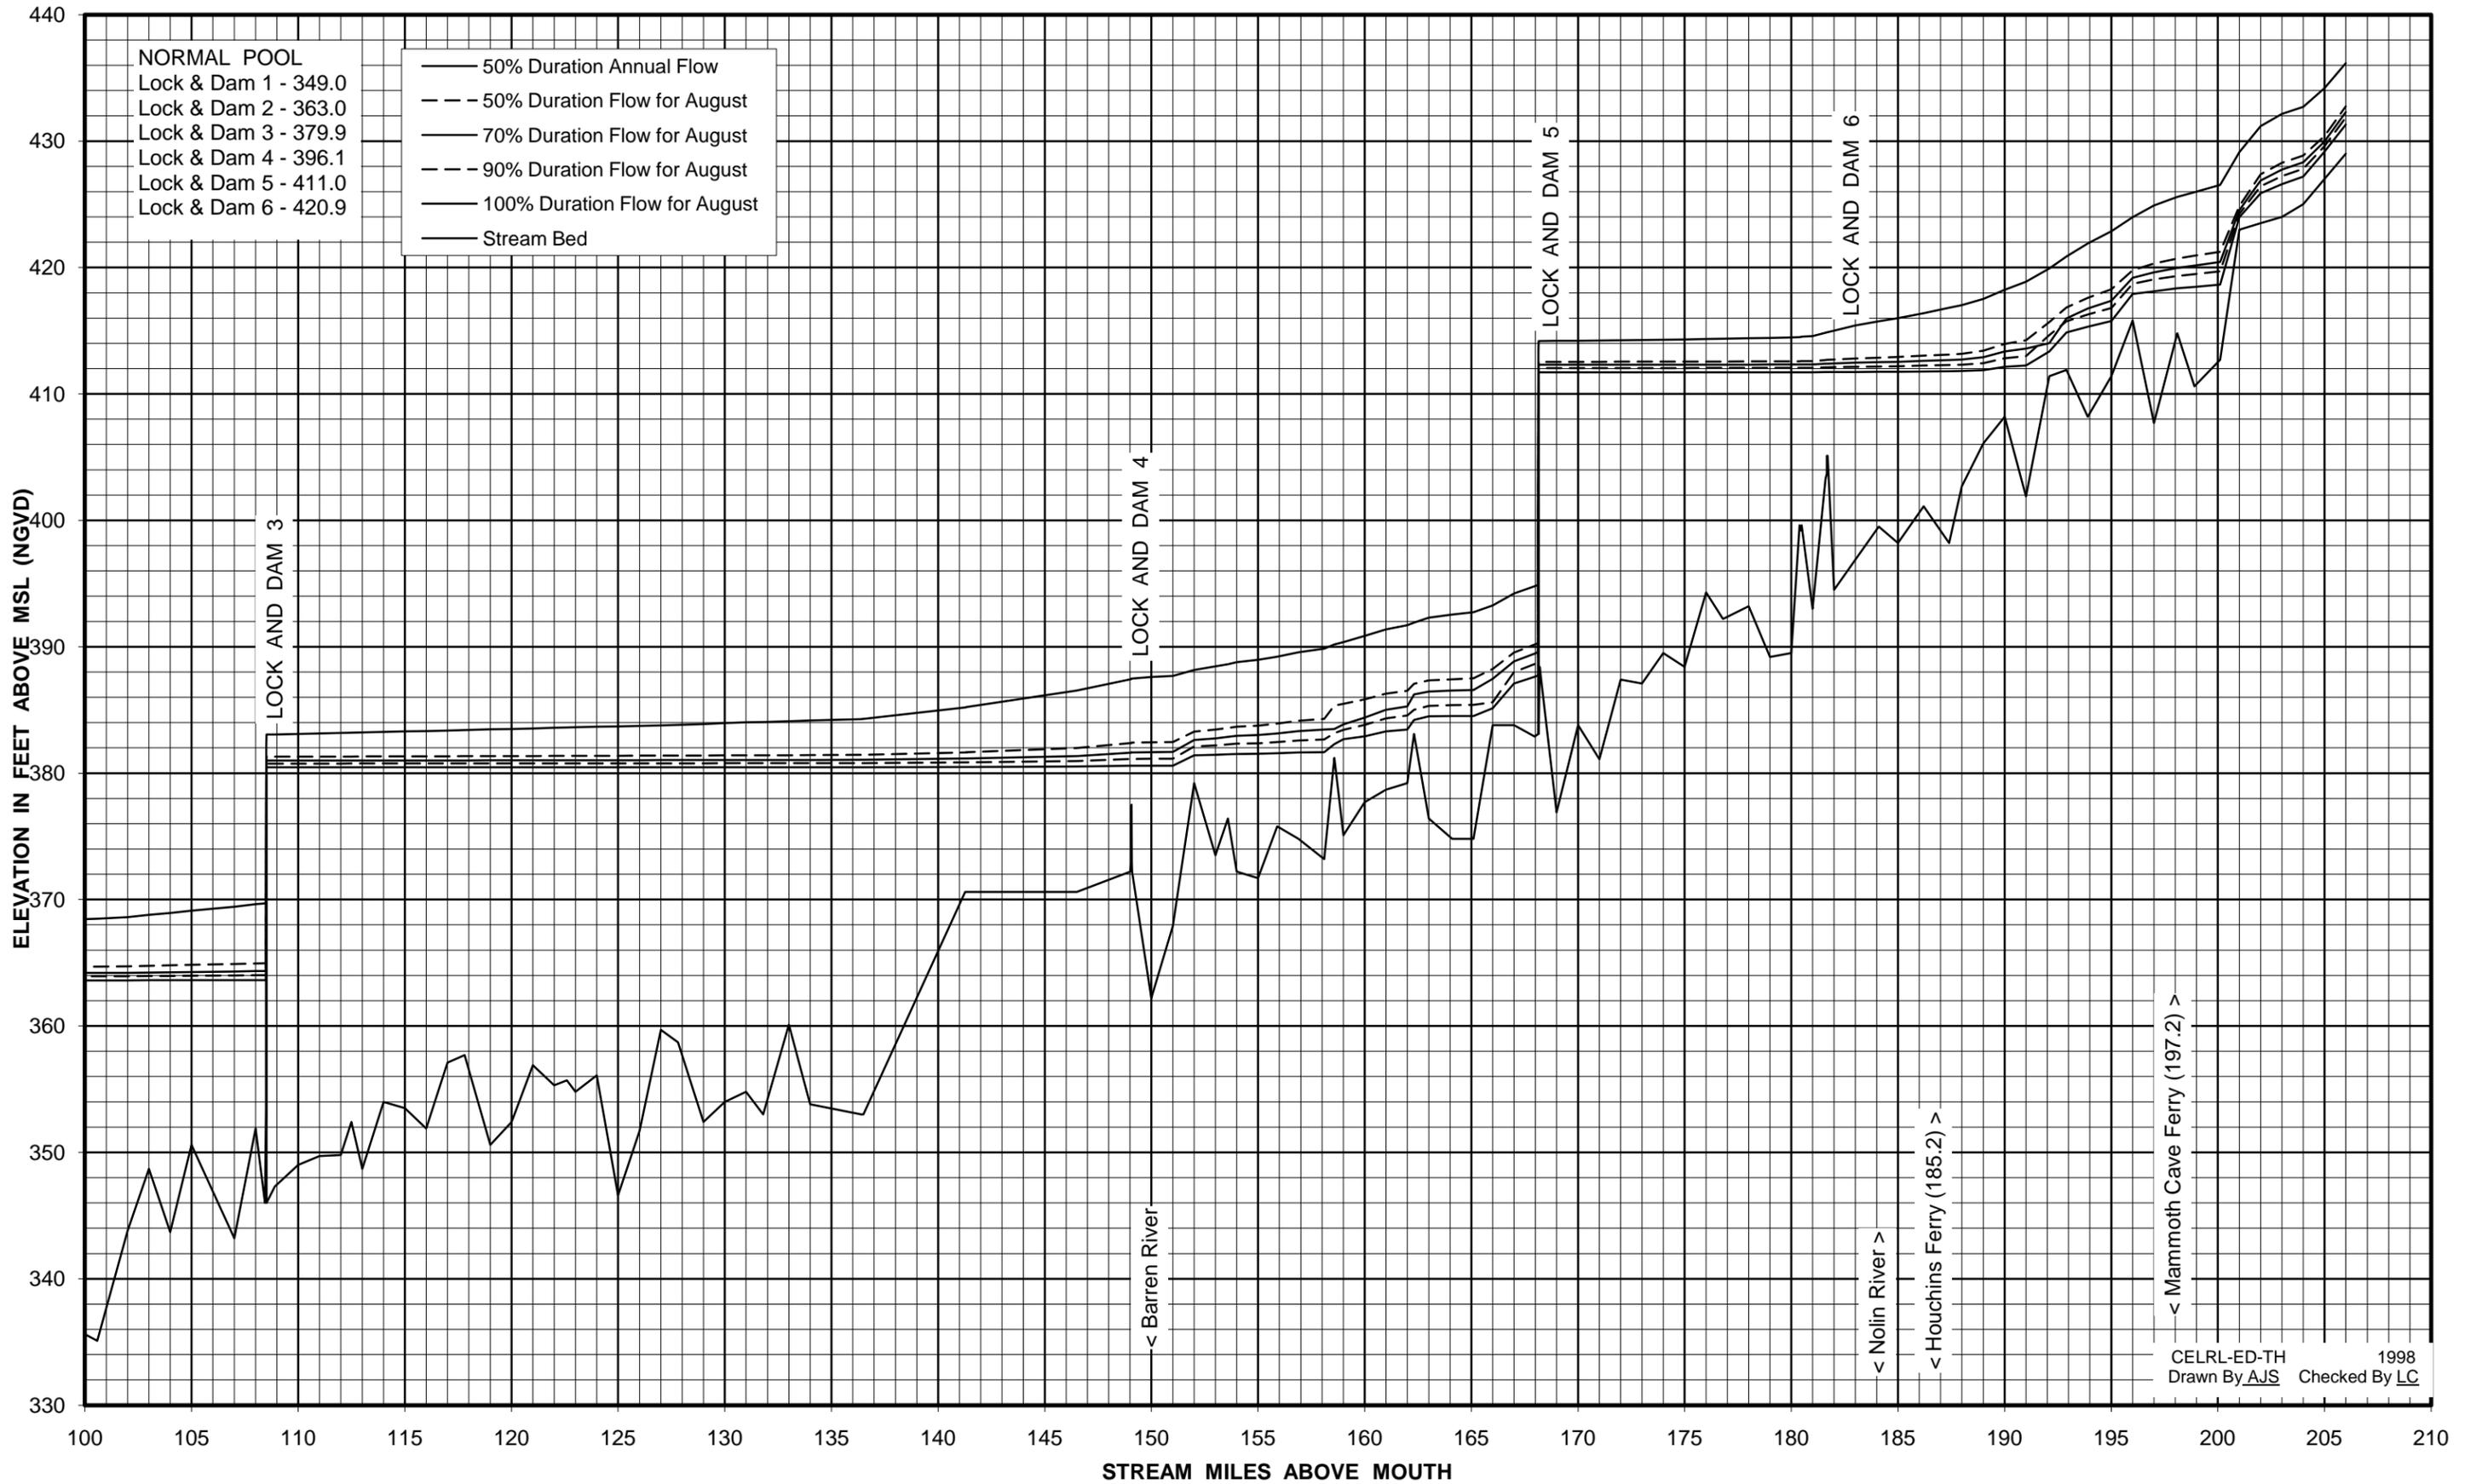


CELRL-ED-TH 1998  
 Drawn By AJS Checked By LC

**GREEN RIVER - KENTUCKY**  
**DAM 4 DETERIORATED, DAM 5 AND 6 REMOVED**

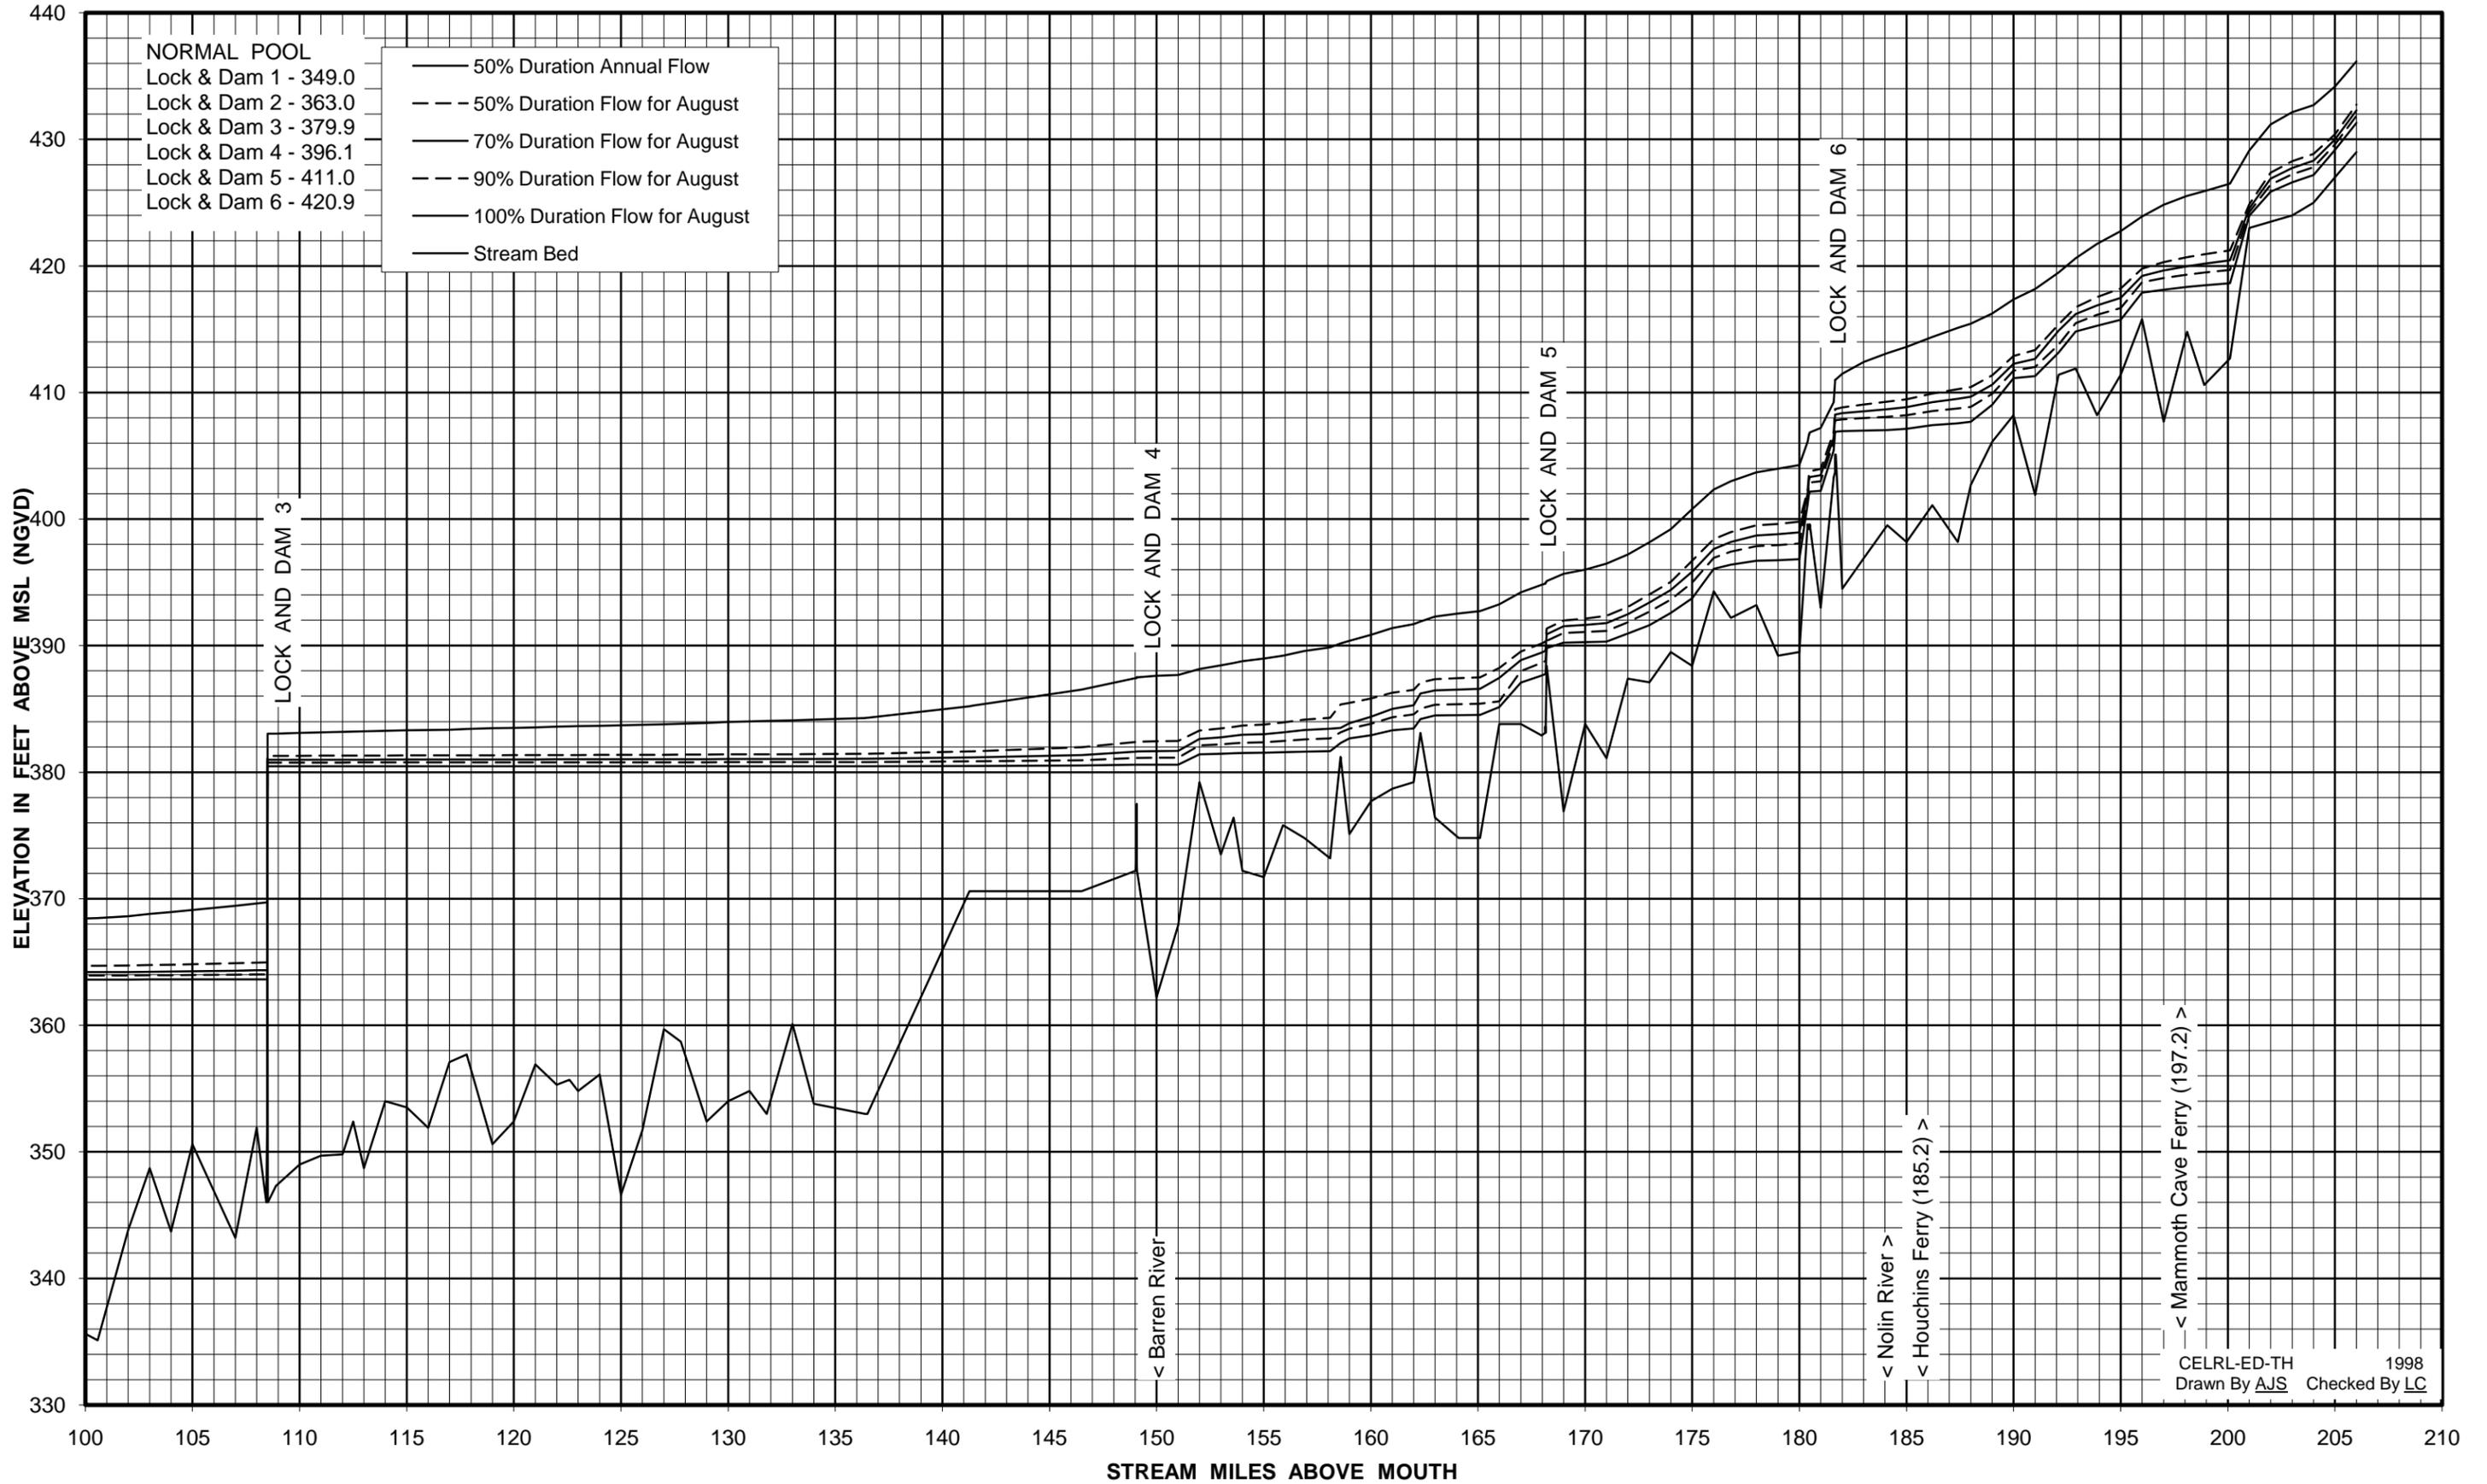


CELRL-ED-TH 1998  
 Drawn By AJS Checked By LC

**GREEN RIVER - KENTUCKY**  
**DAM 4 DETERIORATED, DAM 3, 5 AND 6 REMOVED**

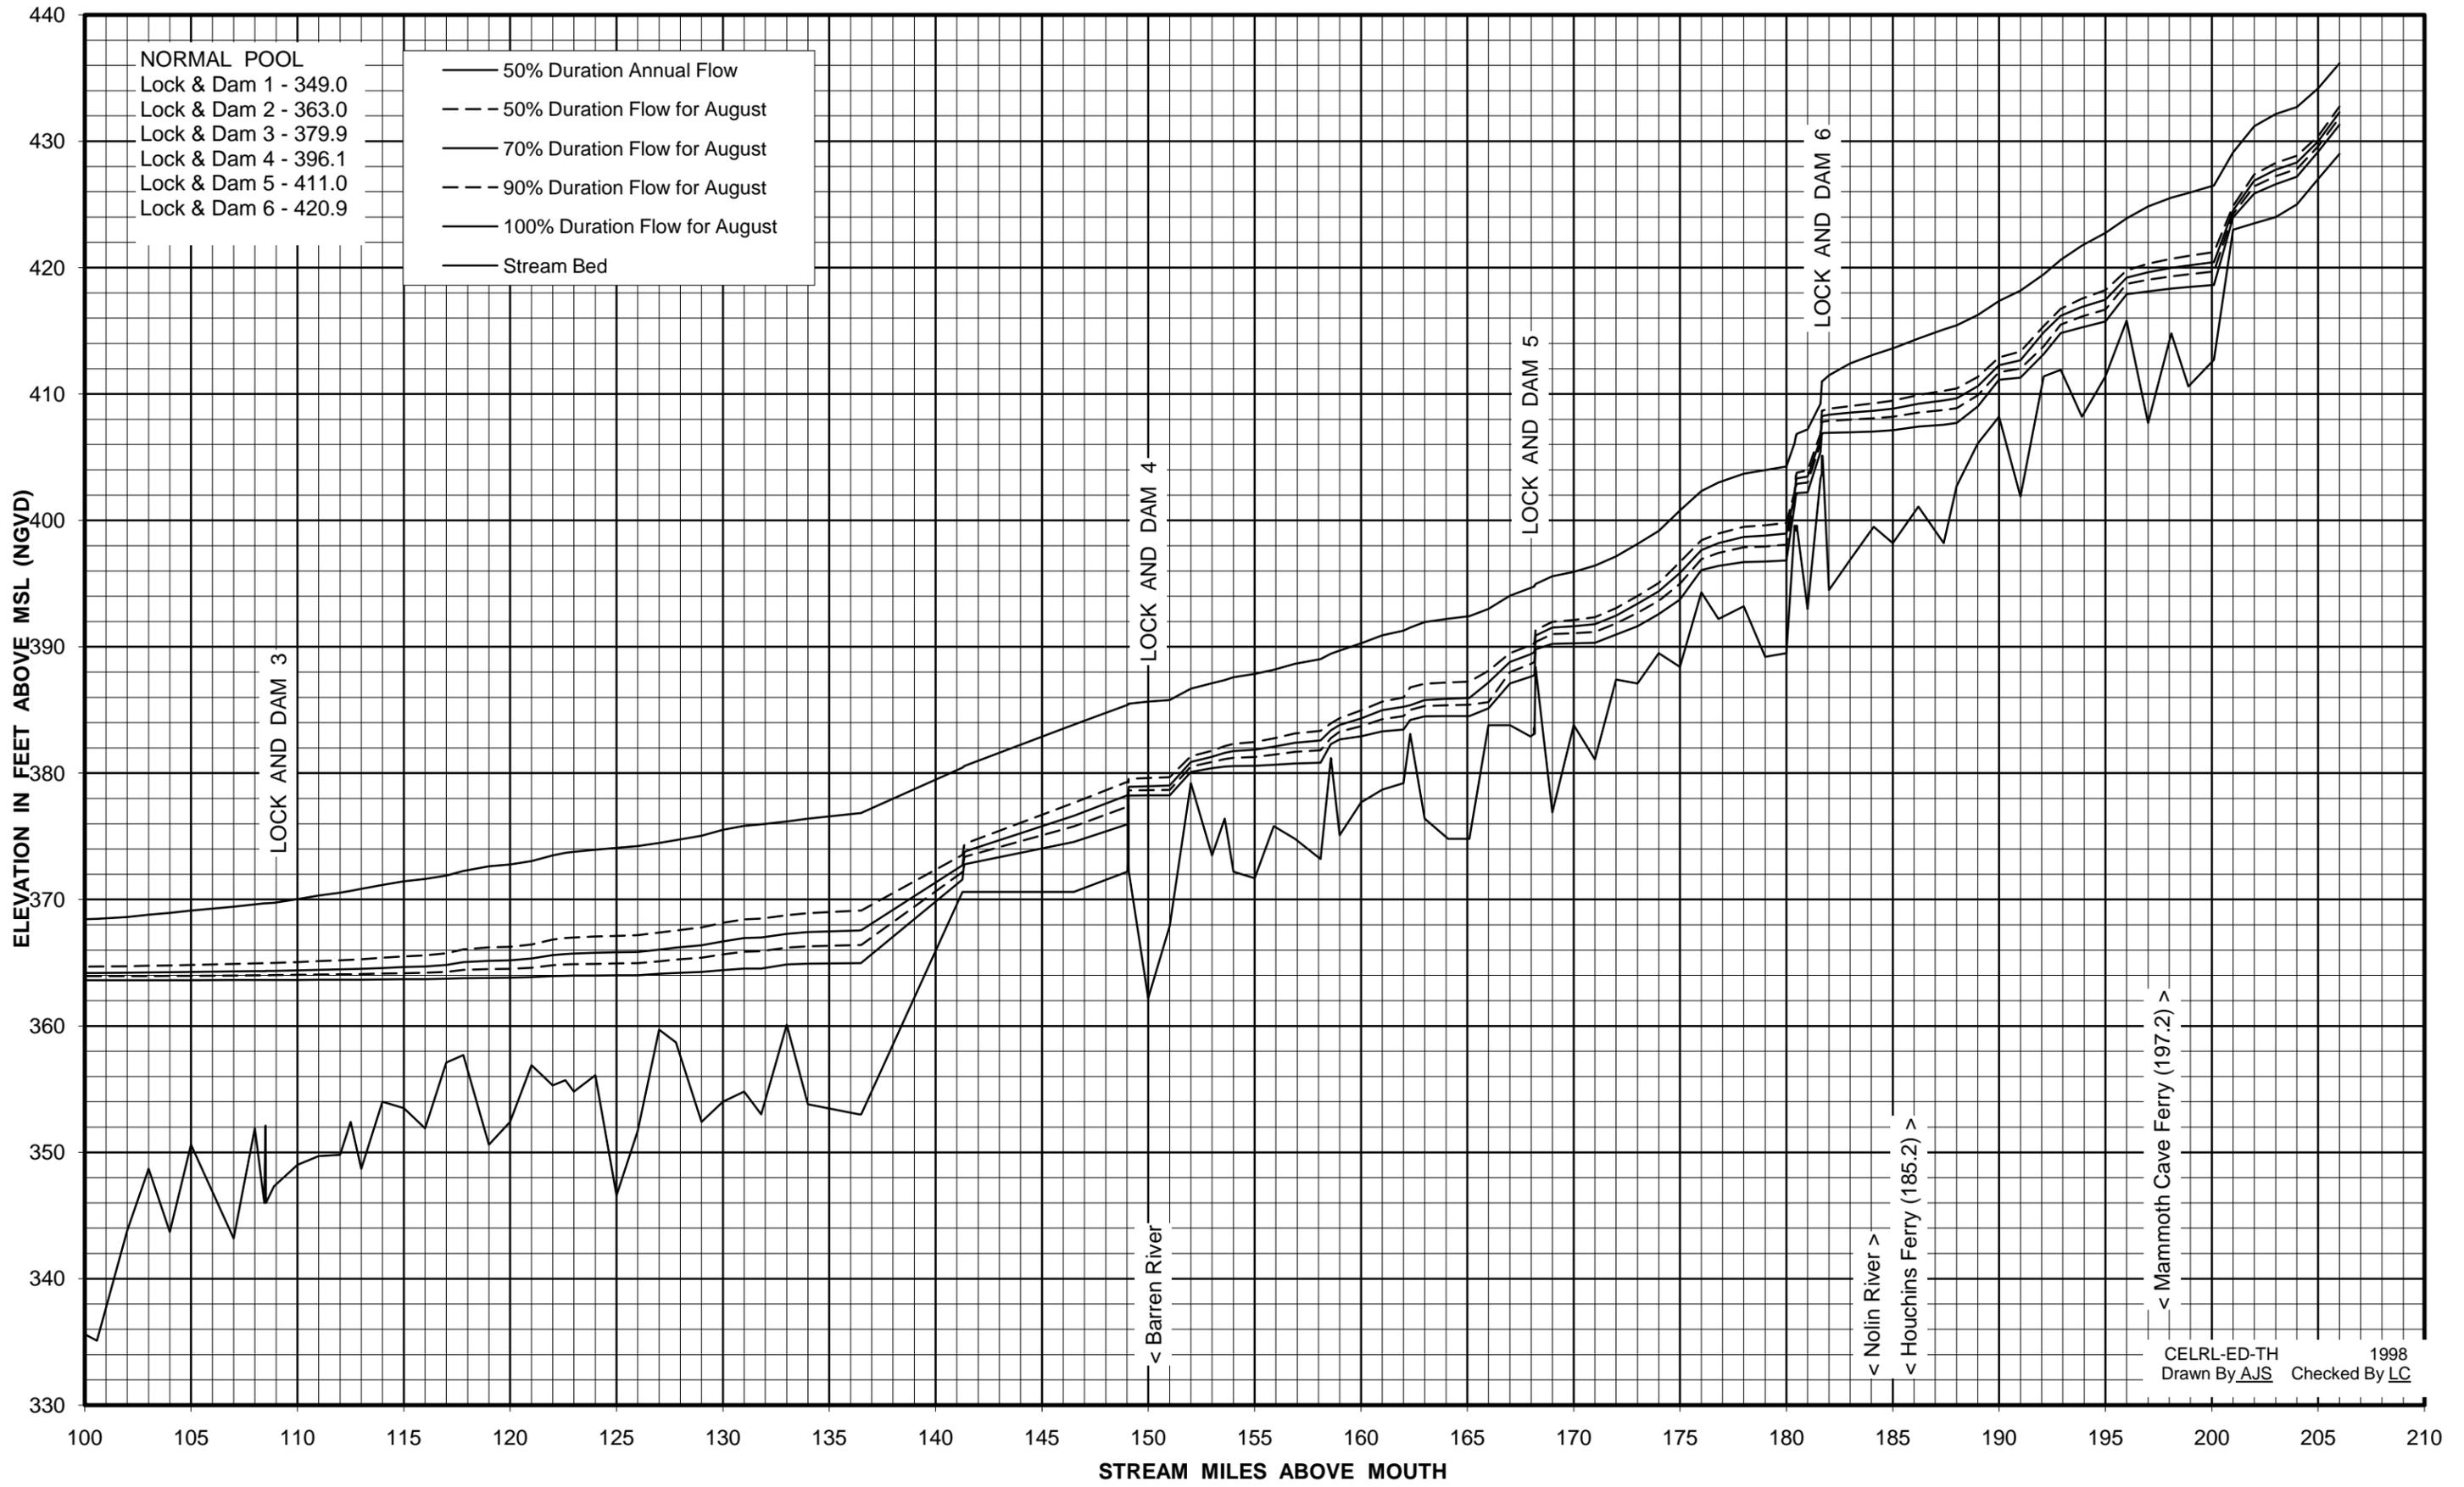


CELRL-ED-TH 1998  
 Drawn By AJS Checked By LC

**BARREN RIVER - KENTUCKY**  
**DESIGN CONDITIONS - ALL LOCKS AND DAMS IN PLACE**

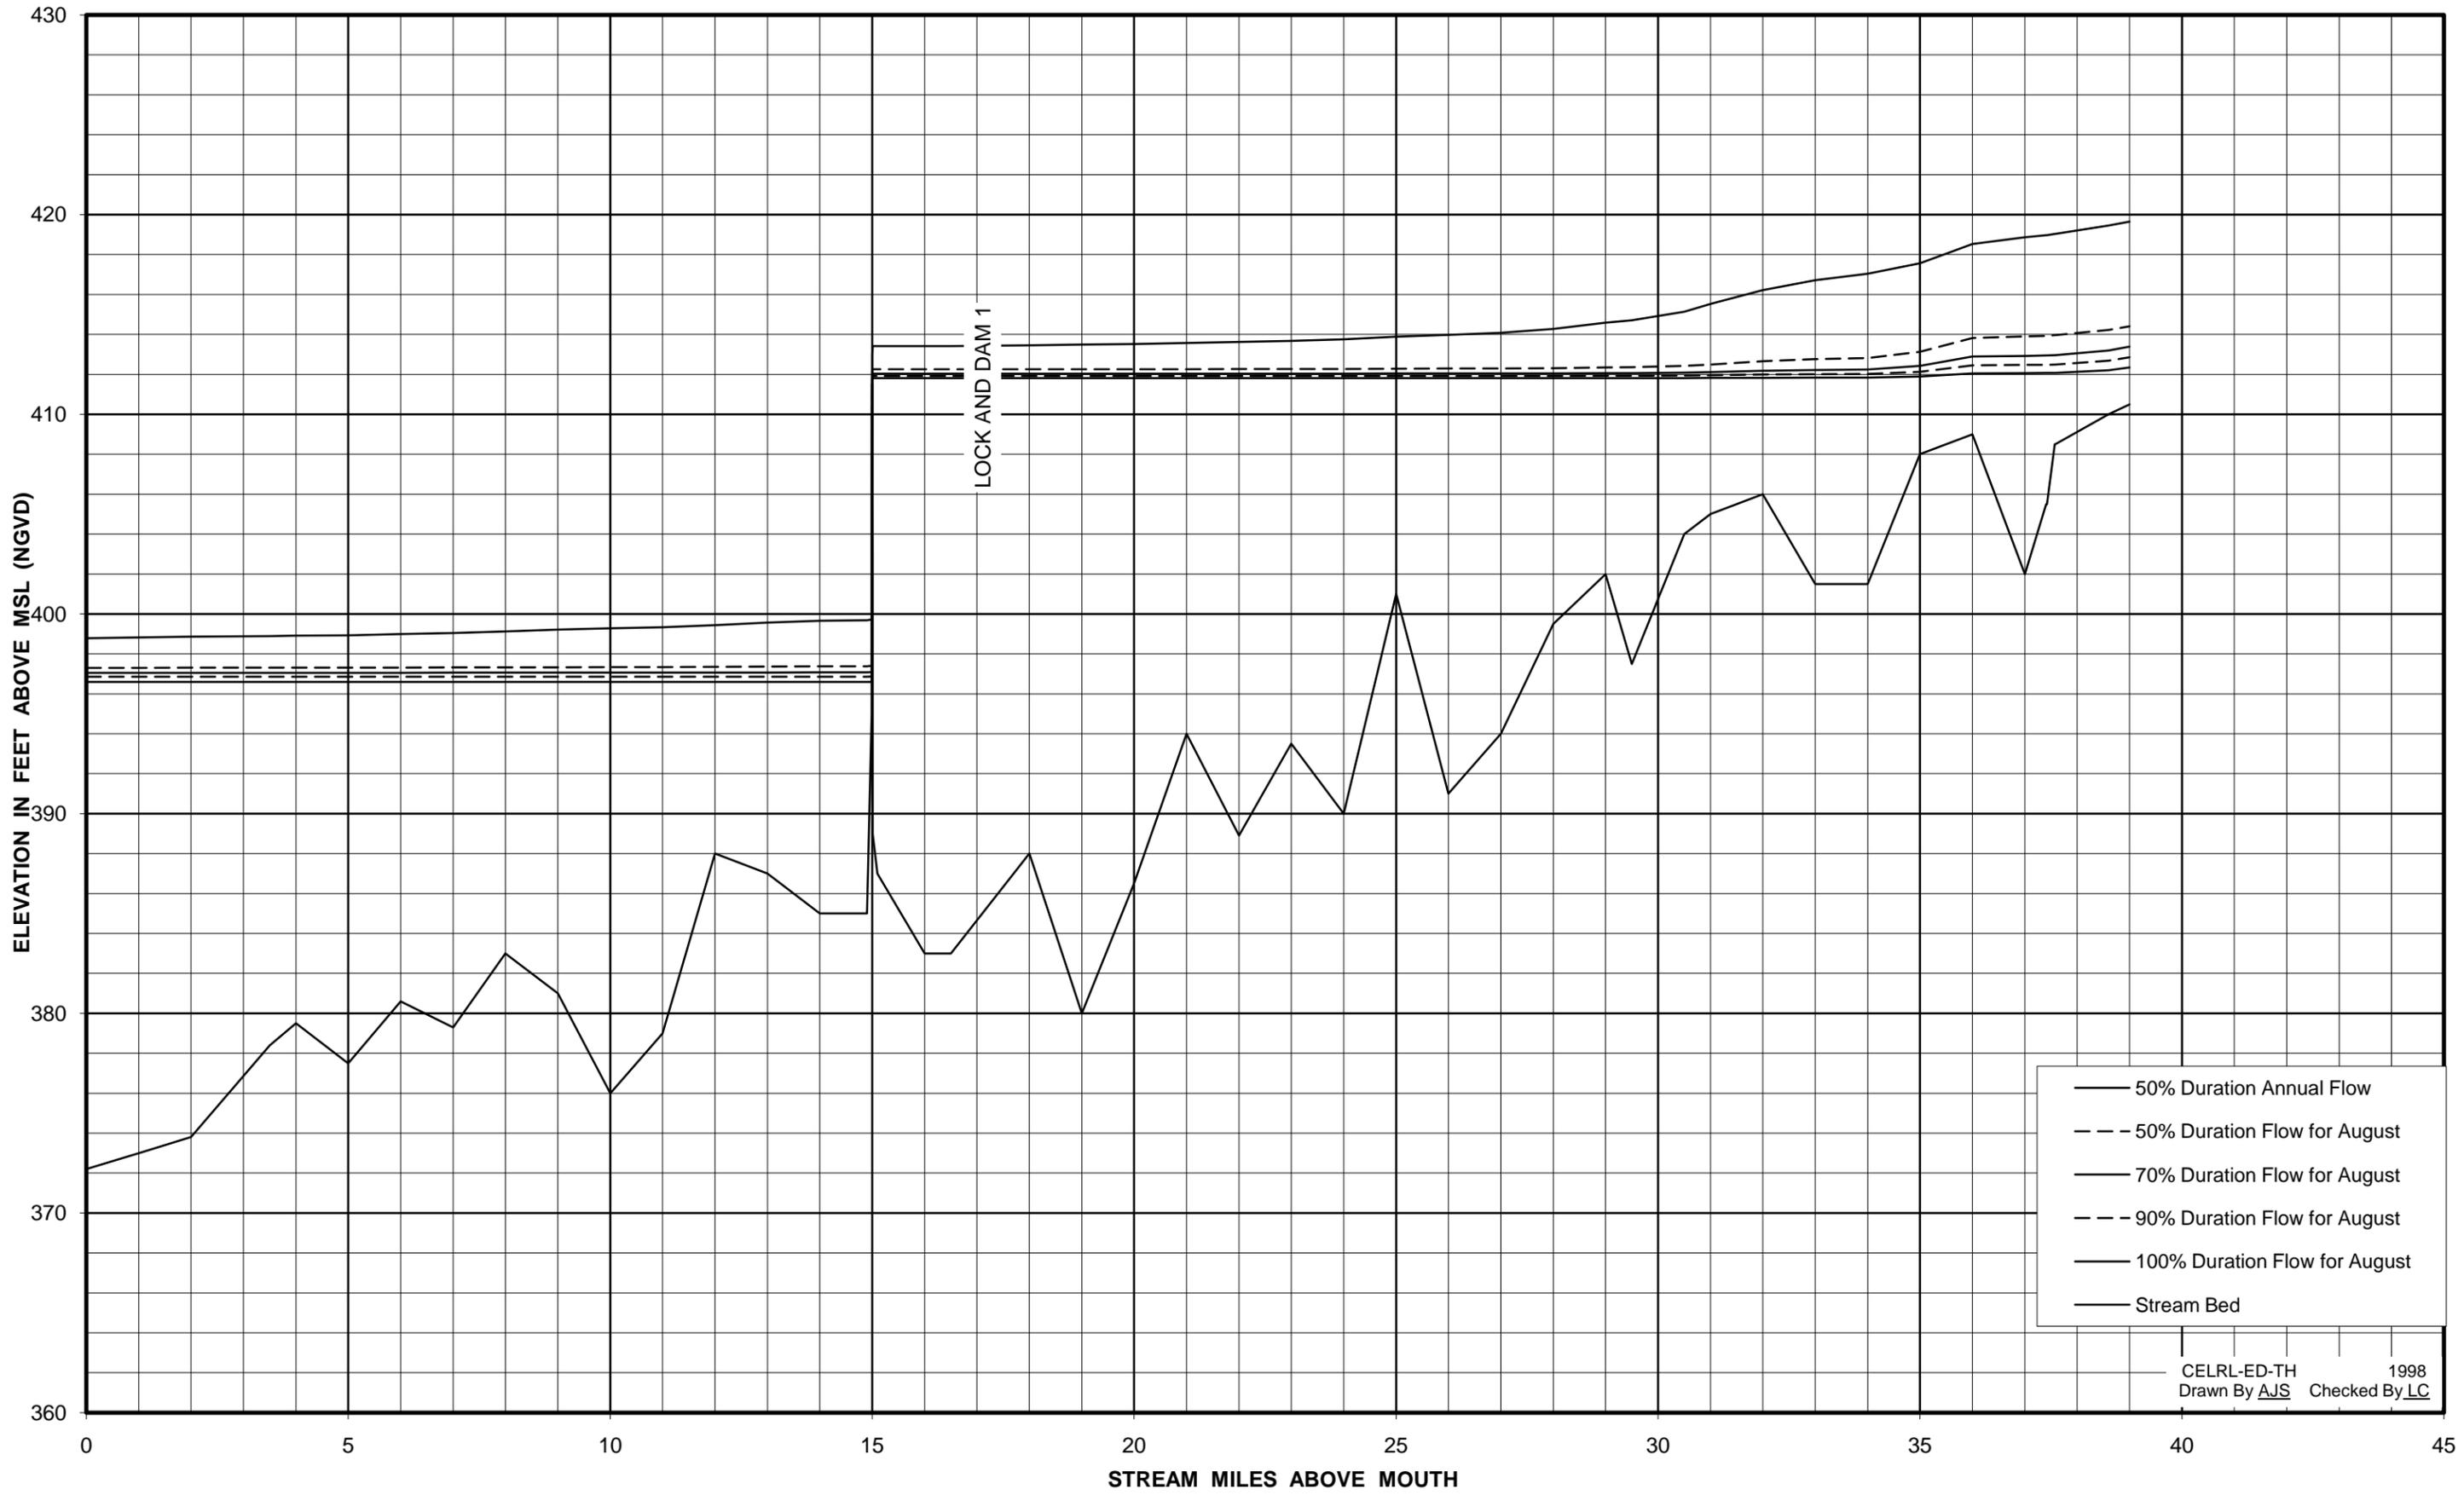

CELRL-ED-TH  
 Drawn By AJS 1998  
 Checked By LC


**BARREN RIVER - KENTUCKY**  
**ESTIMATED EXISTING CONDITIONS (GREEN RIVER DAM 4 DETERIORATED)**

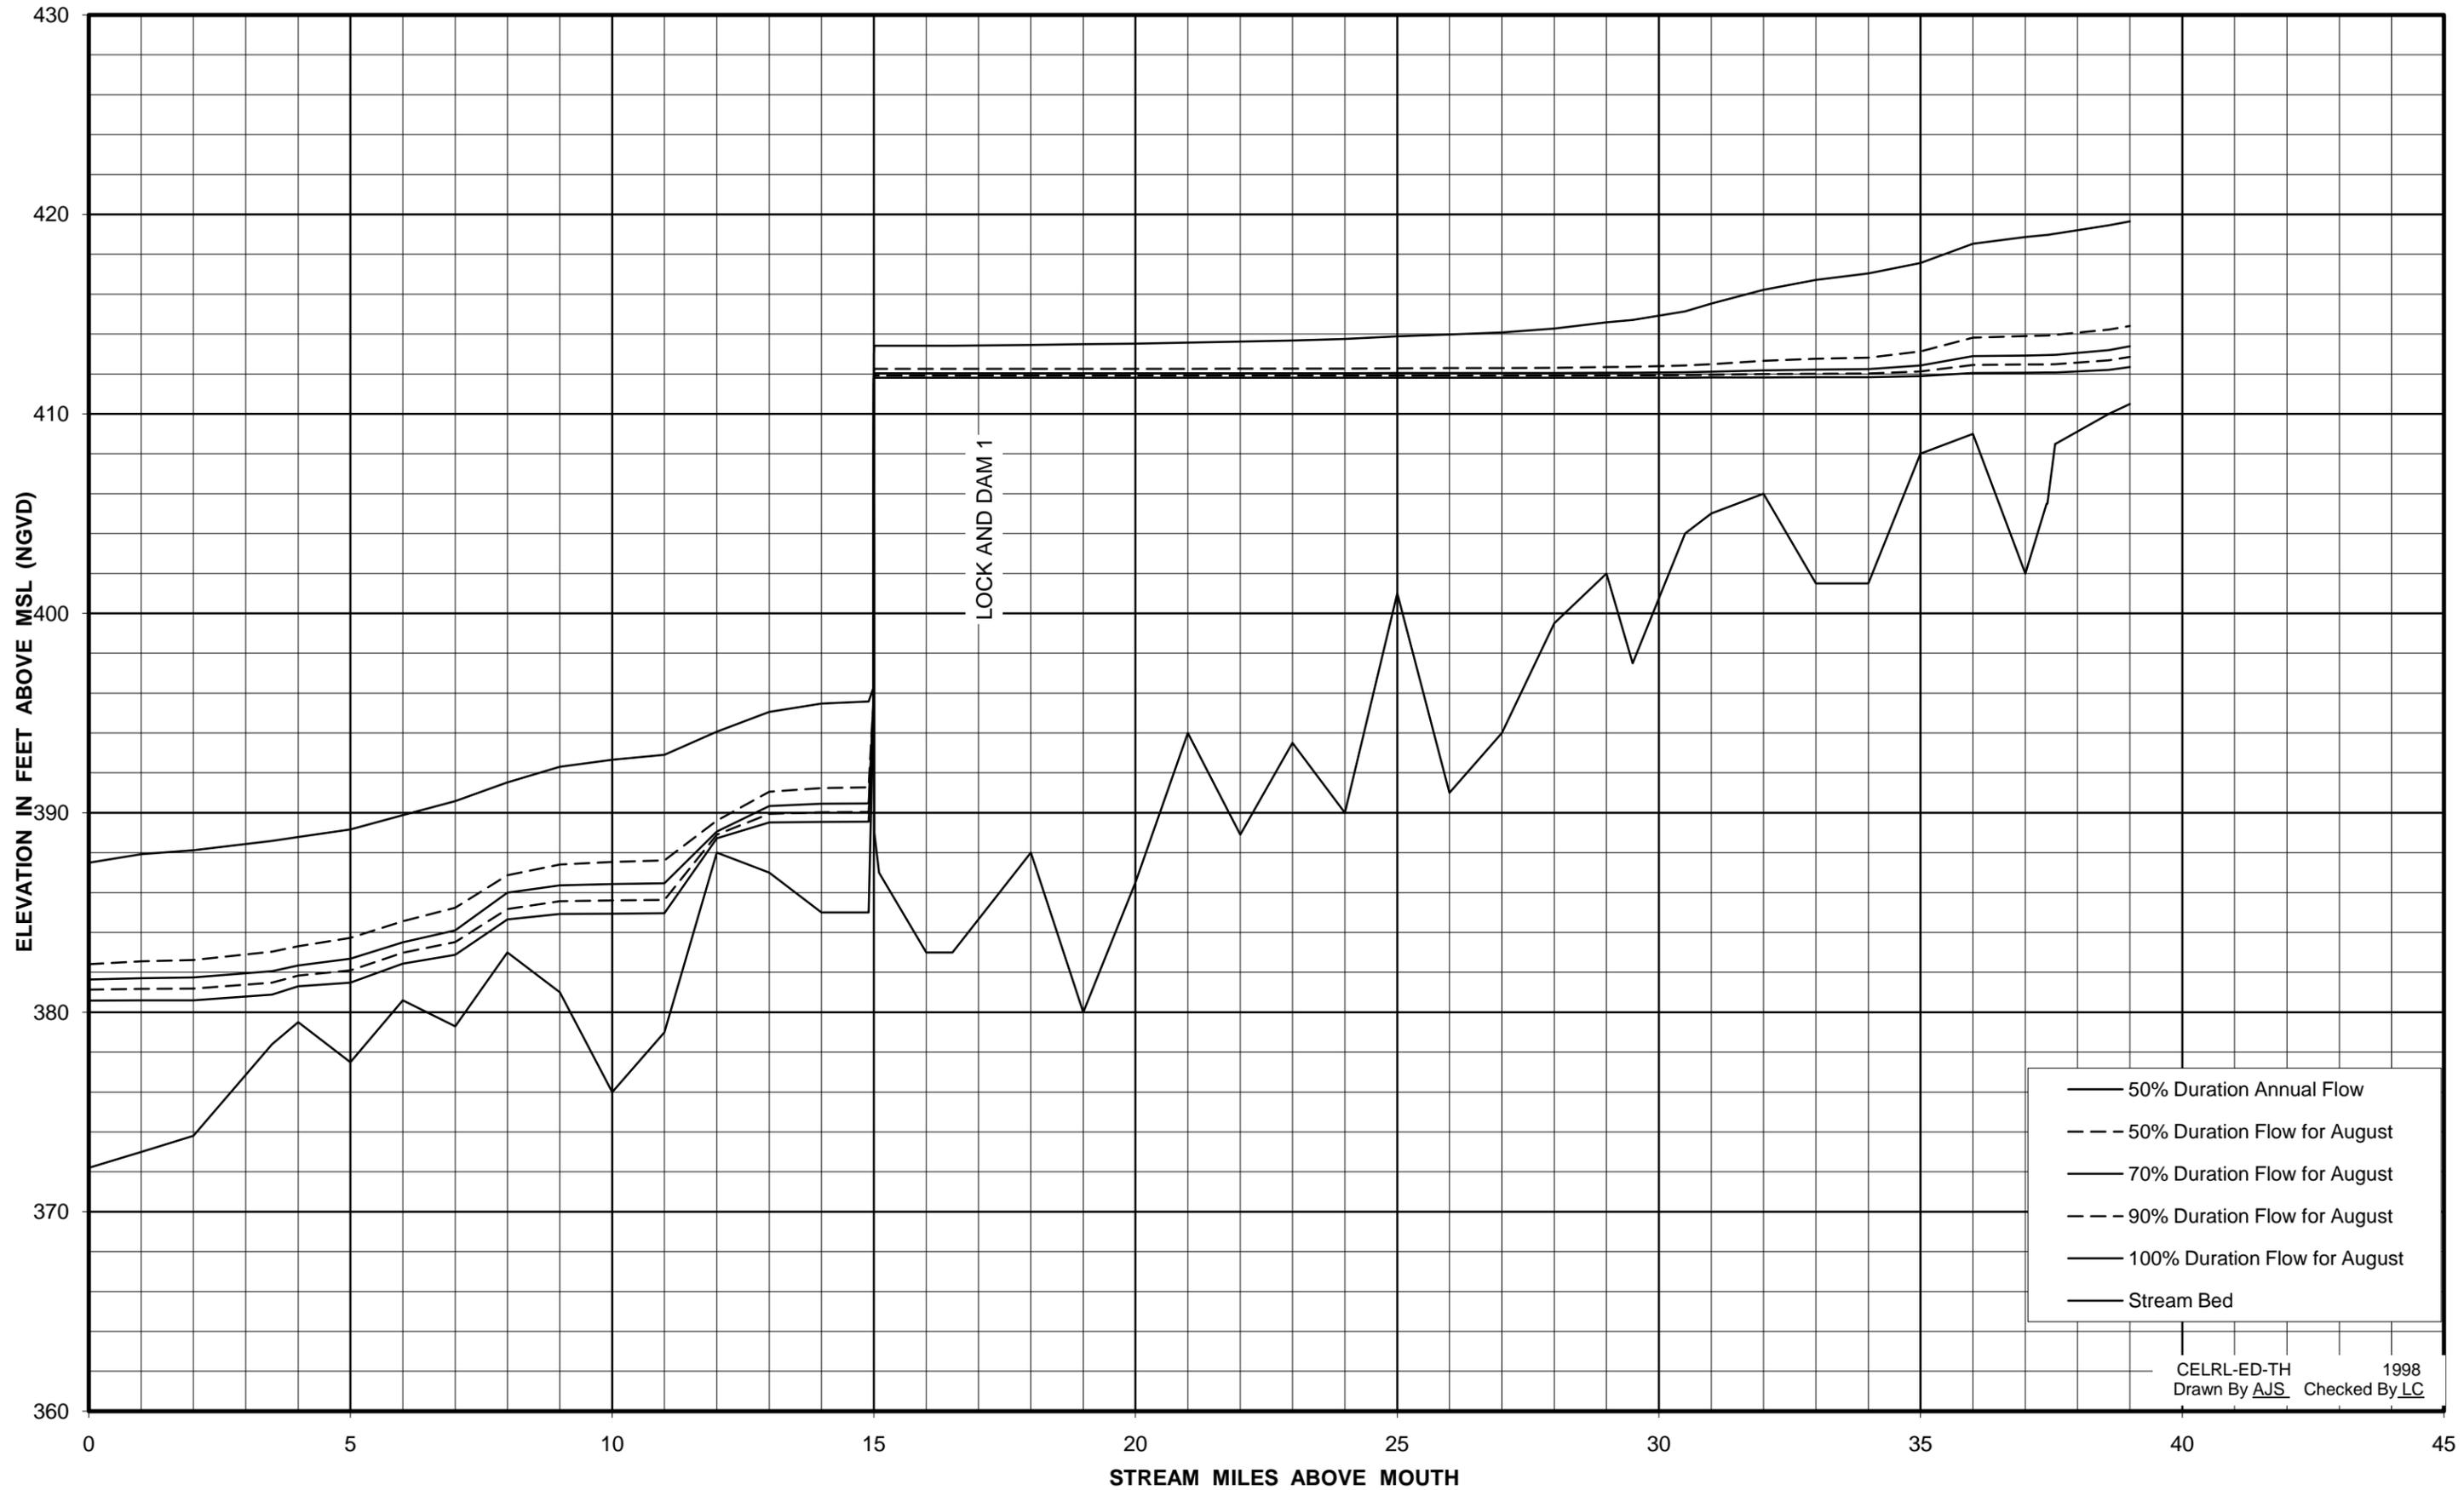

- 50% Duration Annual Flow
- - - 50% Duration Flow for August
- 70% Duration Flow for August
- - - 90% Duration Flow for August
- 100% Duration Flow for August
- Stream Bed


CELRL-ED-TH  
 Drawn By AJS Checked By LC  
 1998

BARREN RIVER - KENTUCKY  
GREEN RIVER DAM 4 DETERIORATED AND BARREN RIVER DAM 1 REMOVED

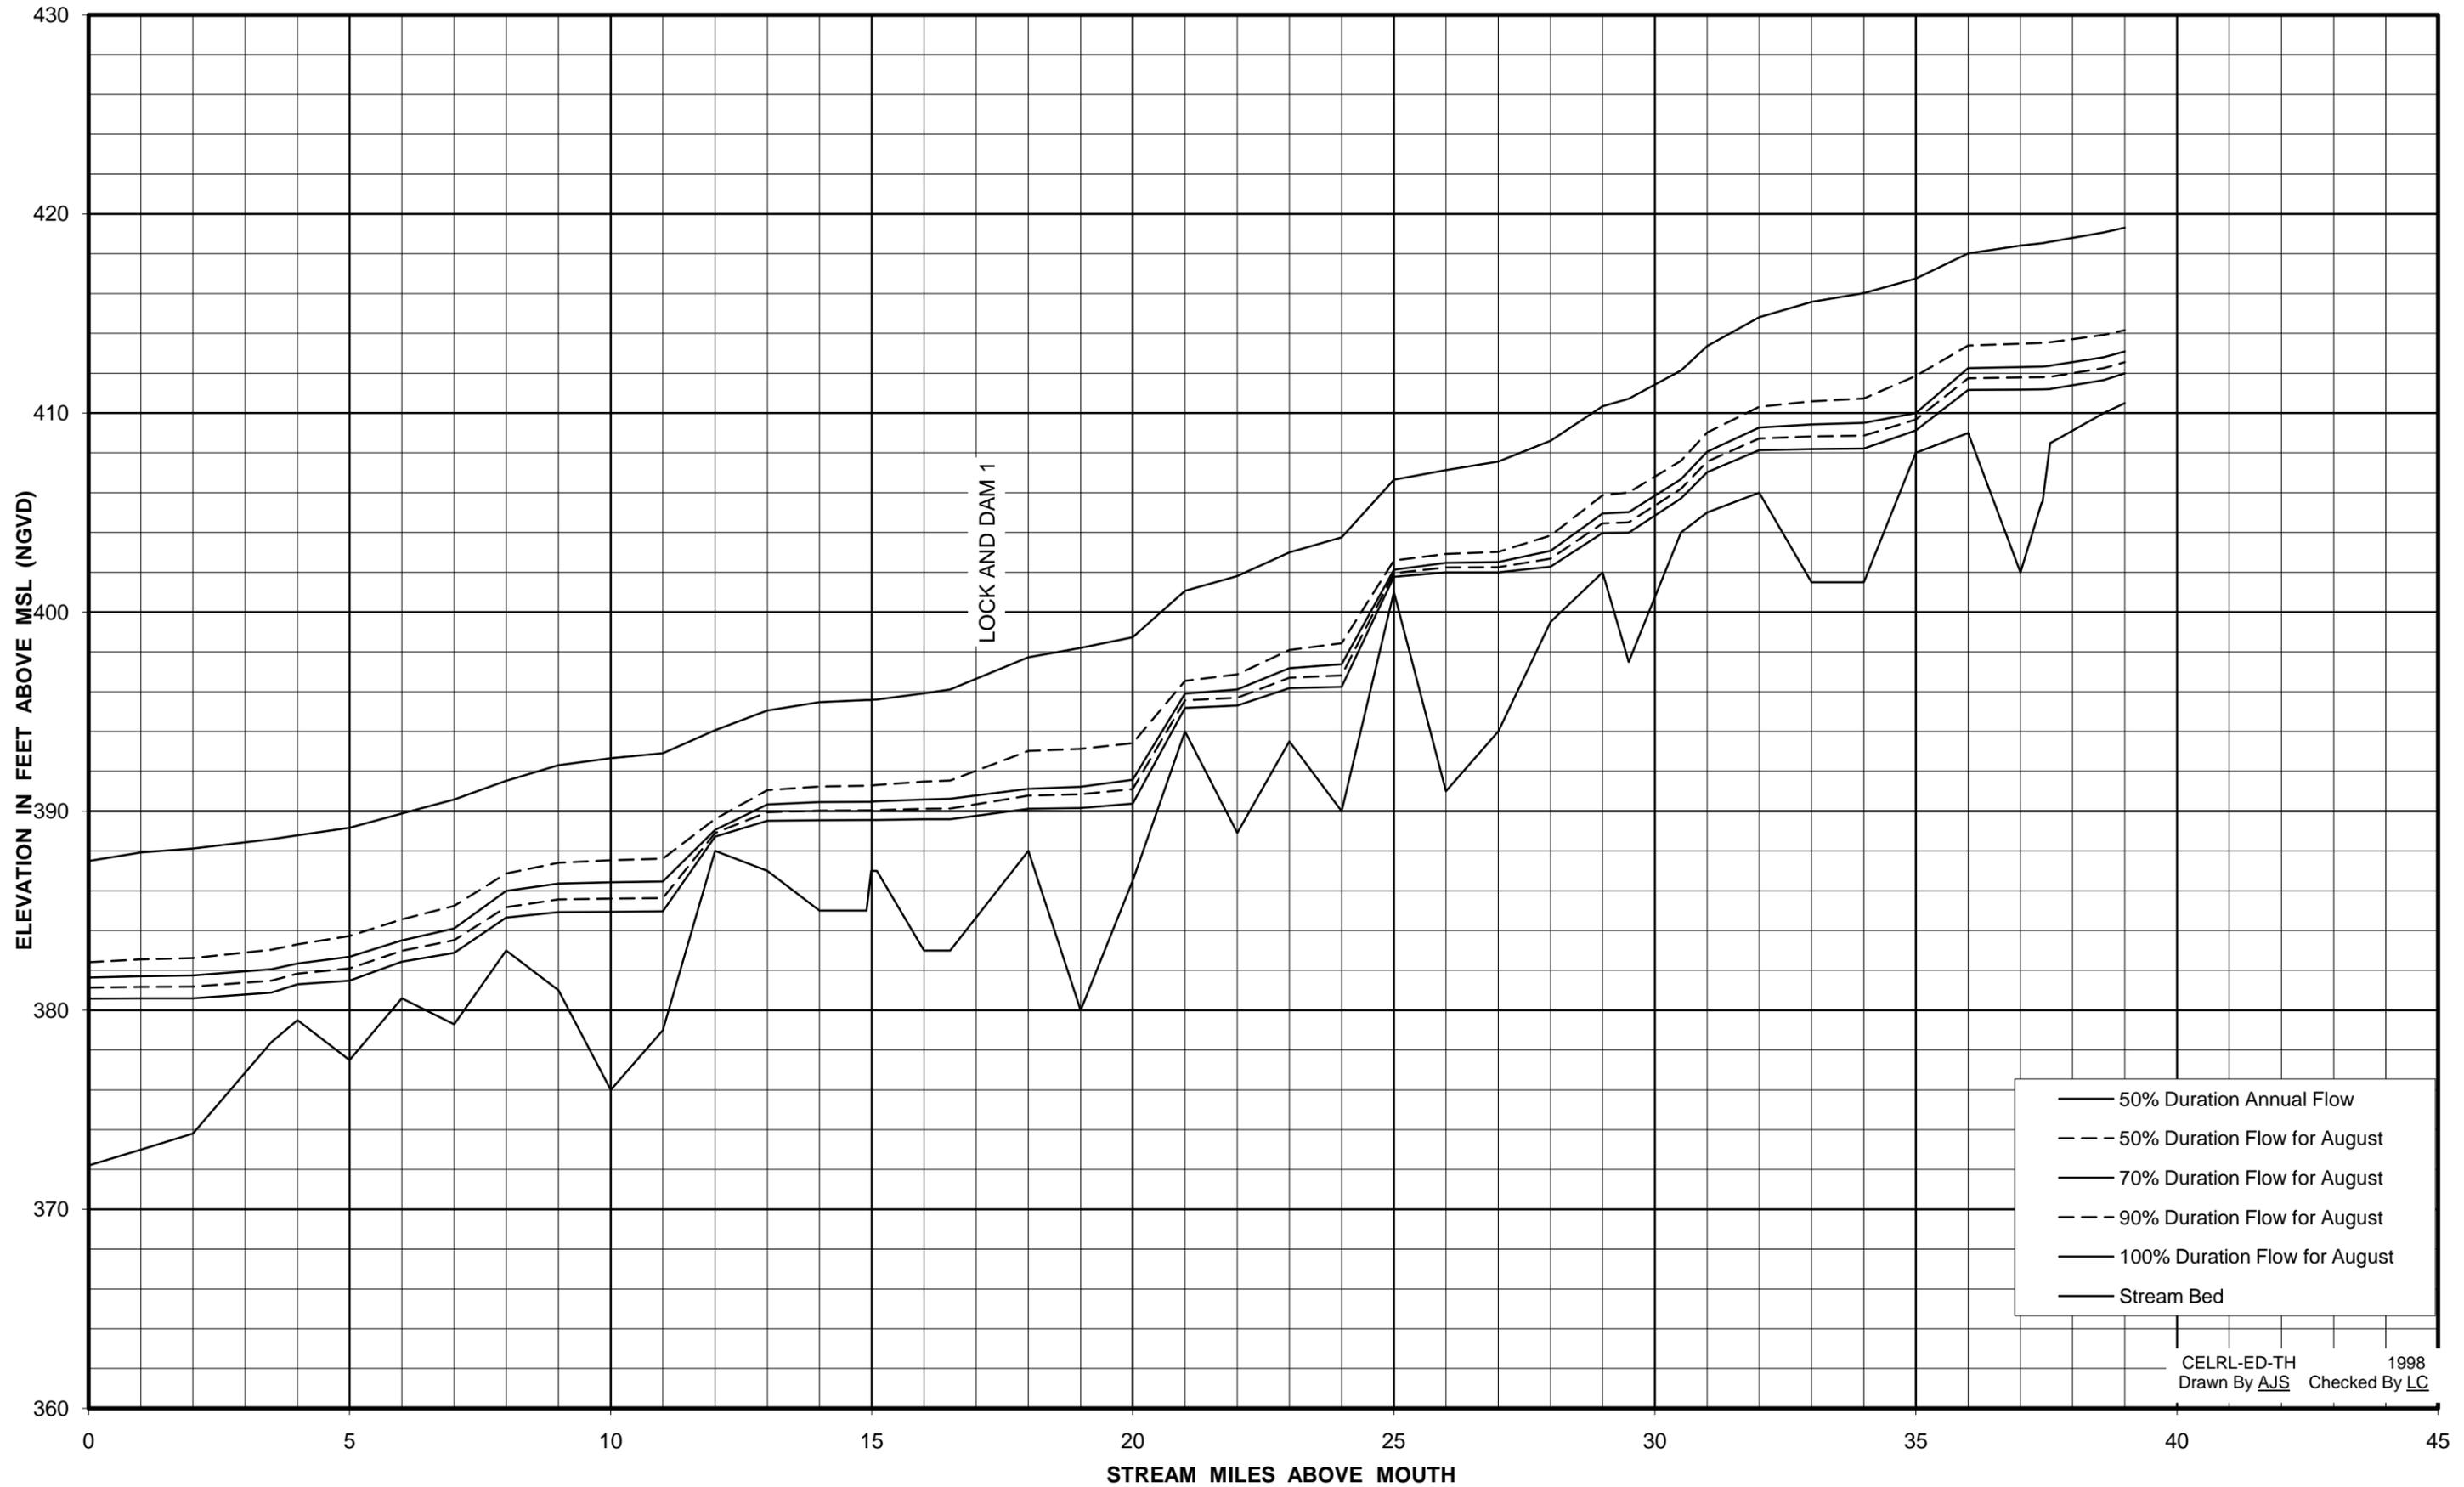


CELRL-ED-TH 1998  
Drawn By AJS Checked By LC

# GREEN RIVER AT BROWNSVILLE - LOCK AND DAM 6

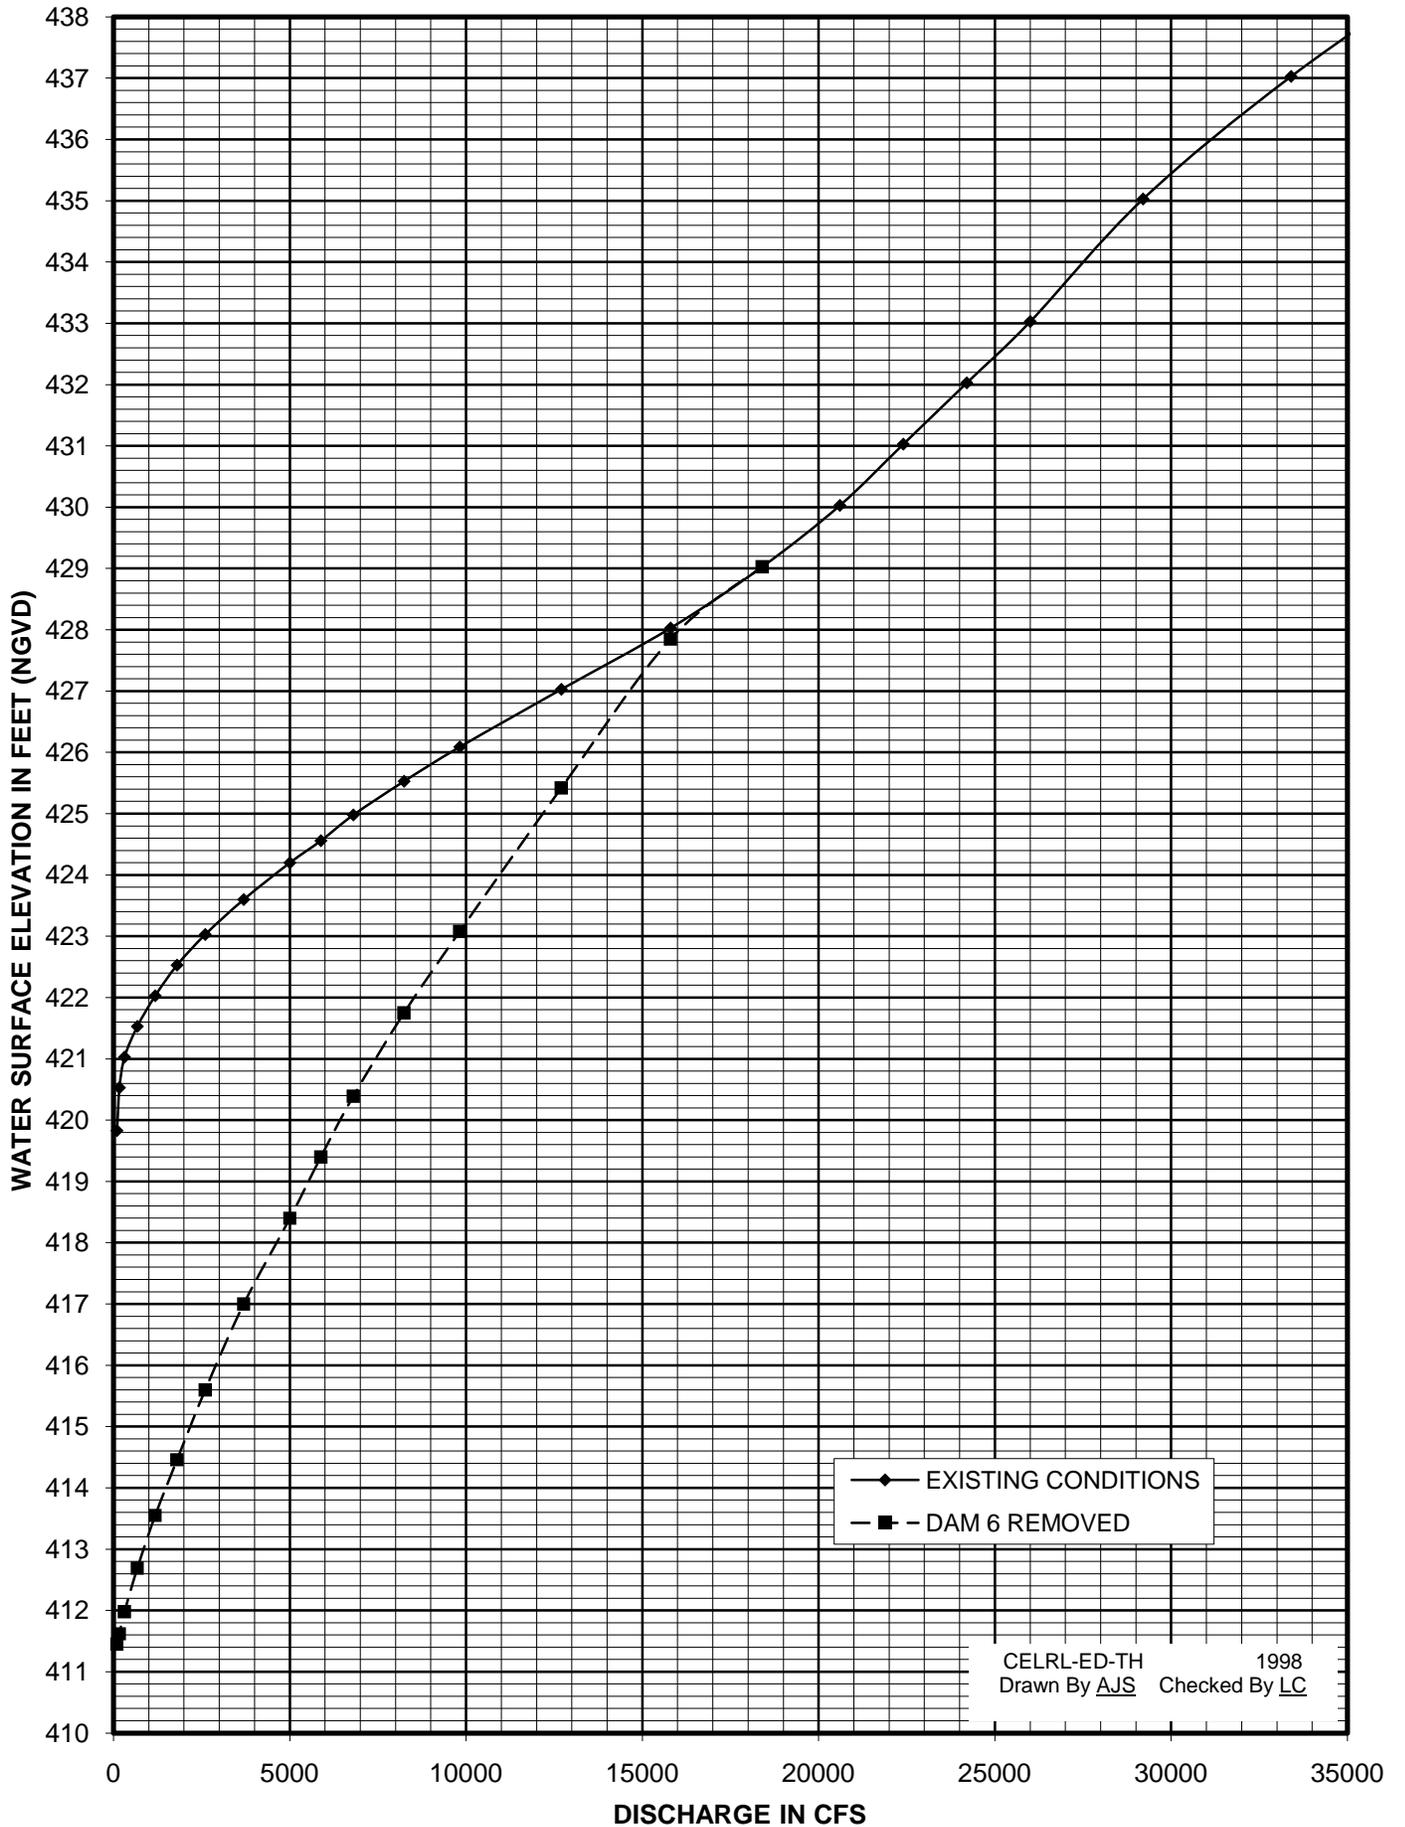


CELRL-ED-TH 1998  
Drawn By AJS Checked By LC

**GREEN RIVER AT MILE 197 - HYPOTHETICAL GAGE  
(MAMMOTH CAVE AREA)**

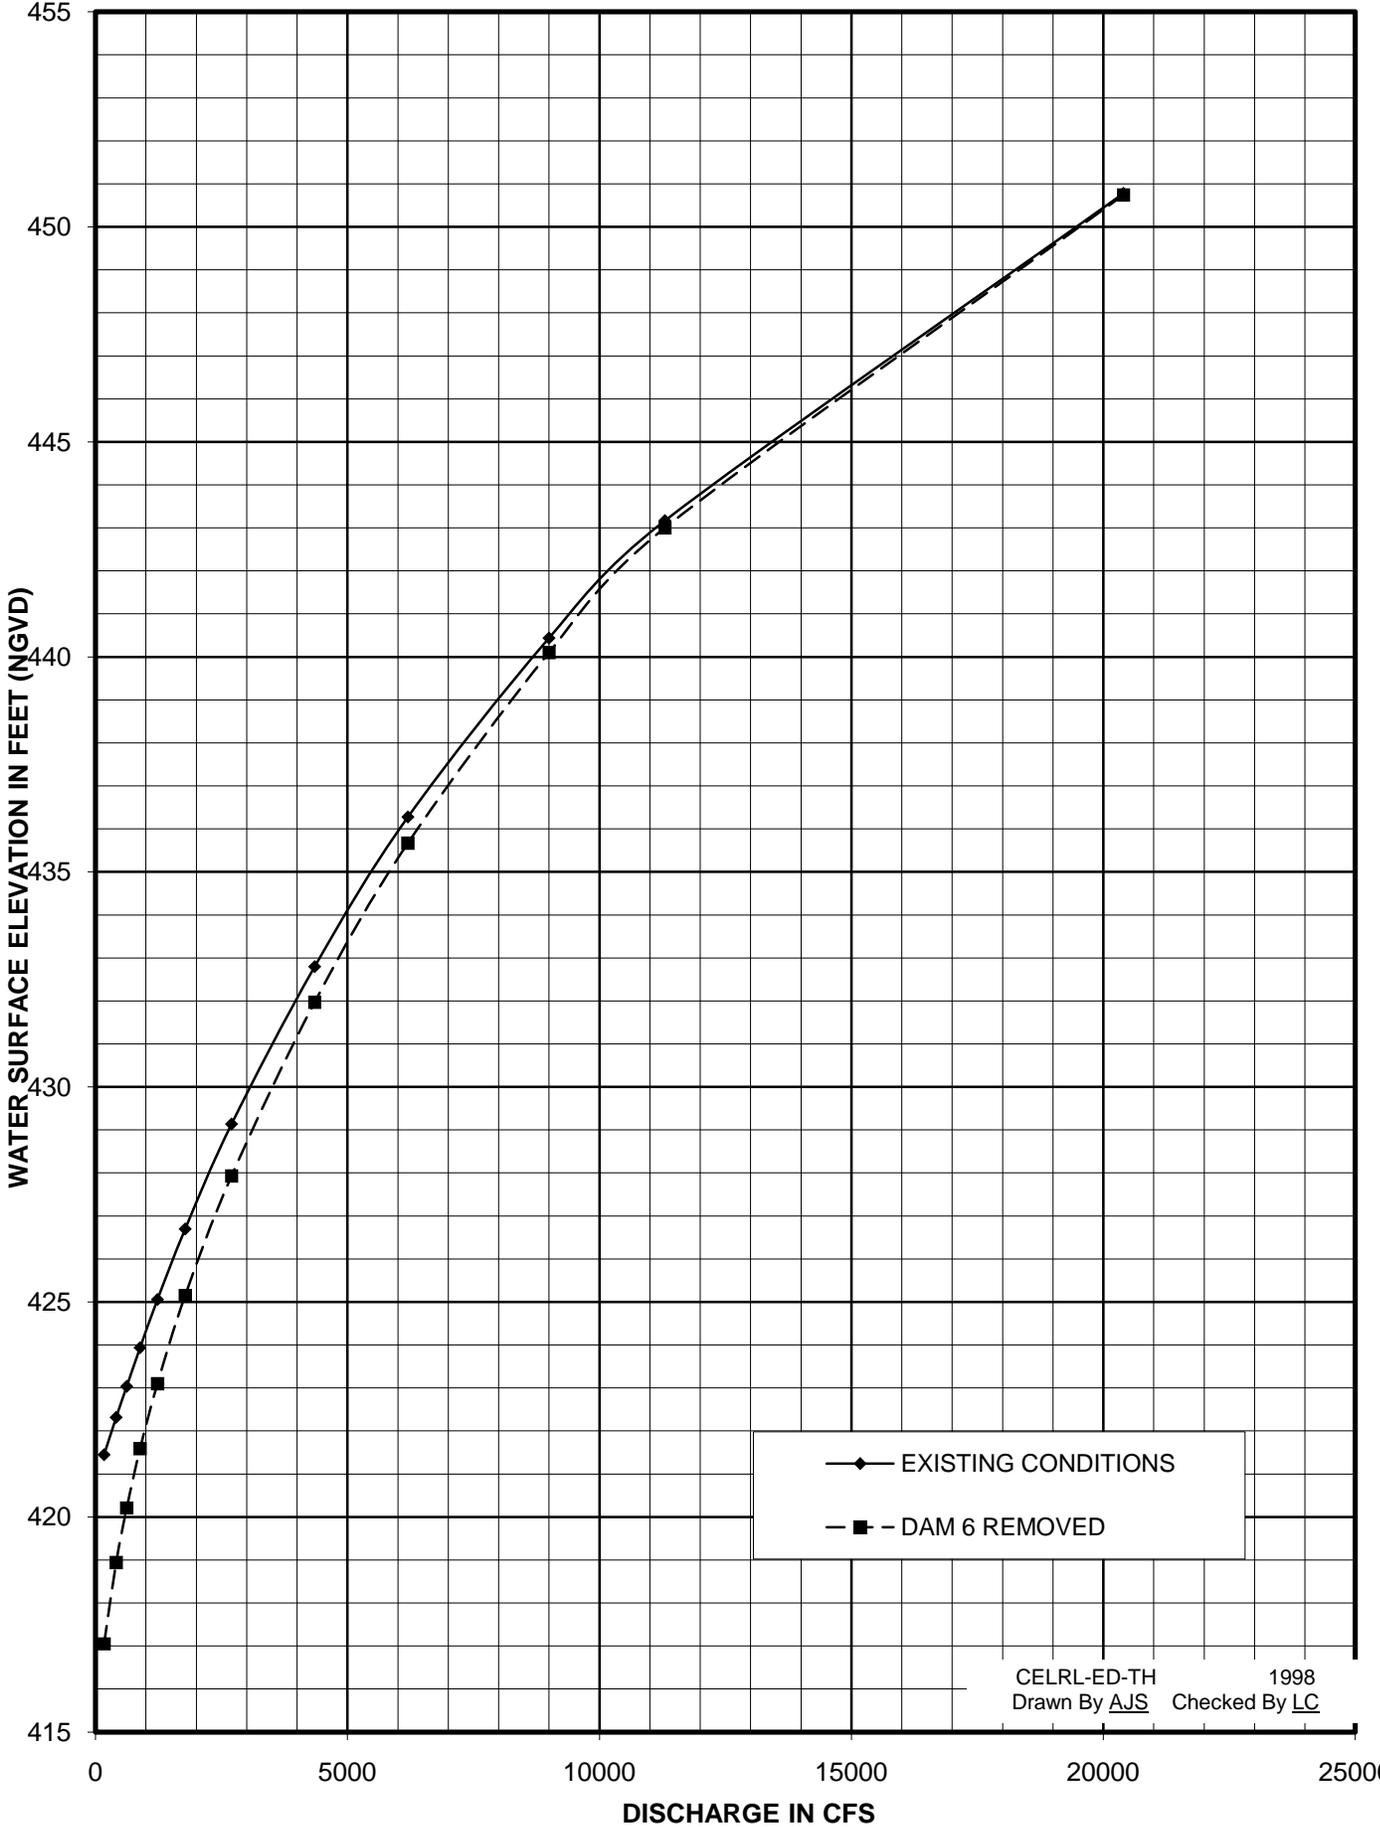


CELRL-ED-TH  
Drawn By AJS Checked By LC

# NOLIN RIVER AT KYROCK

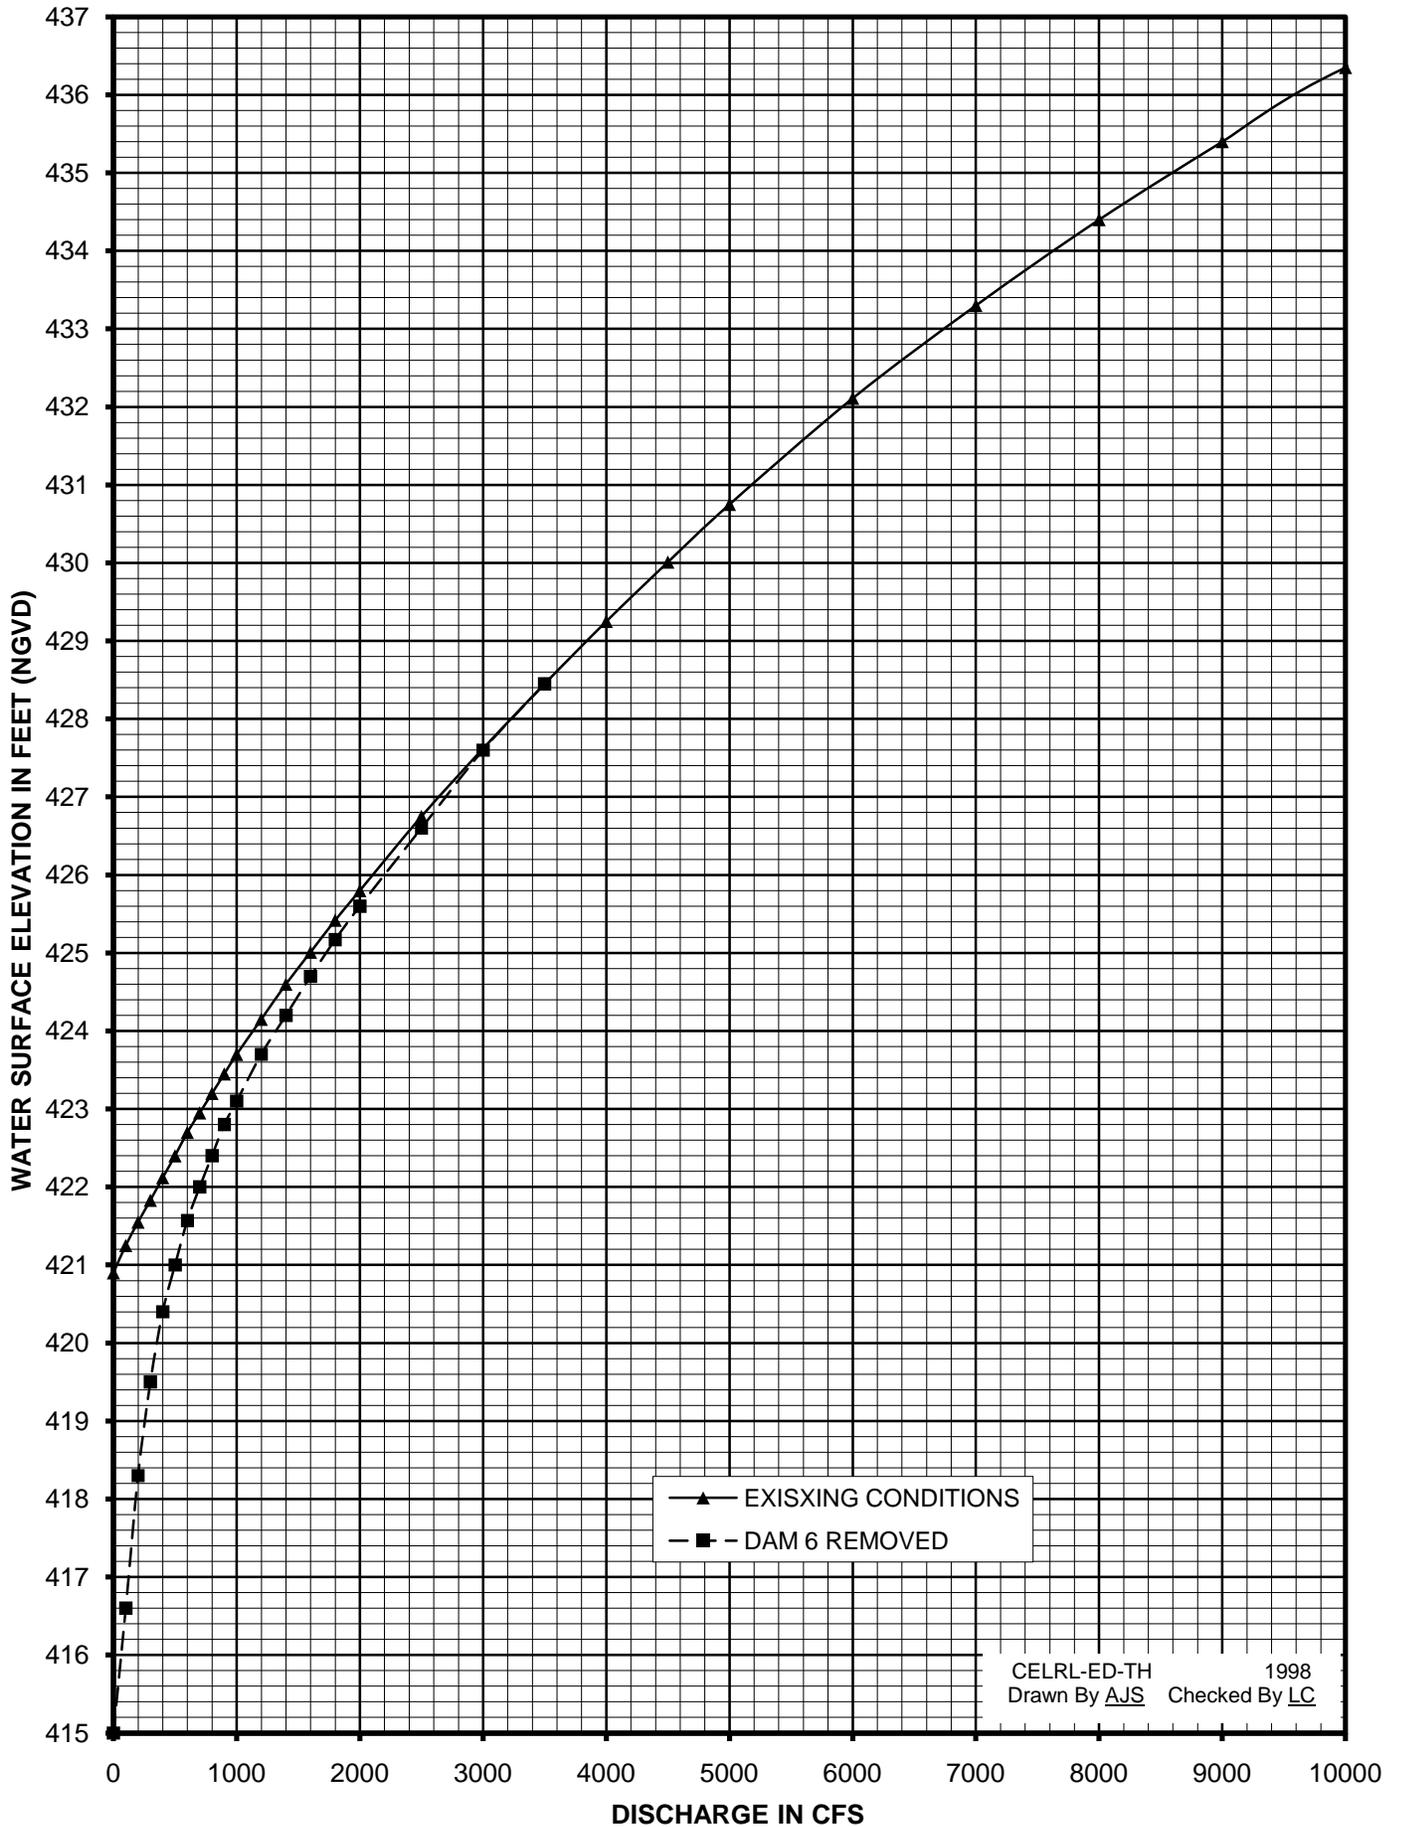


CELRL-ED-TH 1998  
Drawn By AJS Checked By LC

# GREEN RIVER AT BROWNSVILLE - LOCK AND DAM 6 ELEVATION DURATION

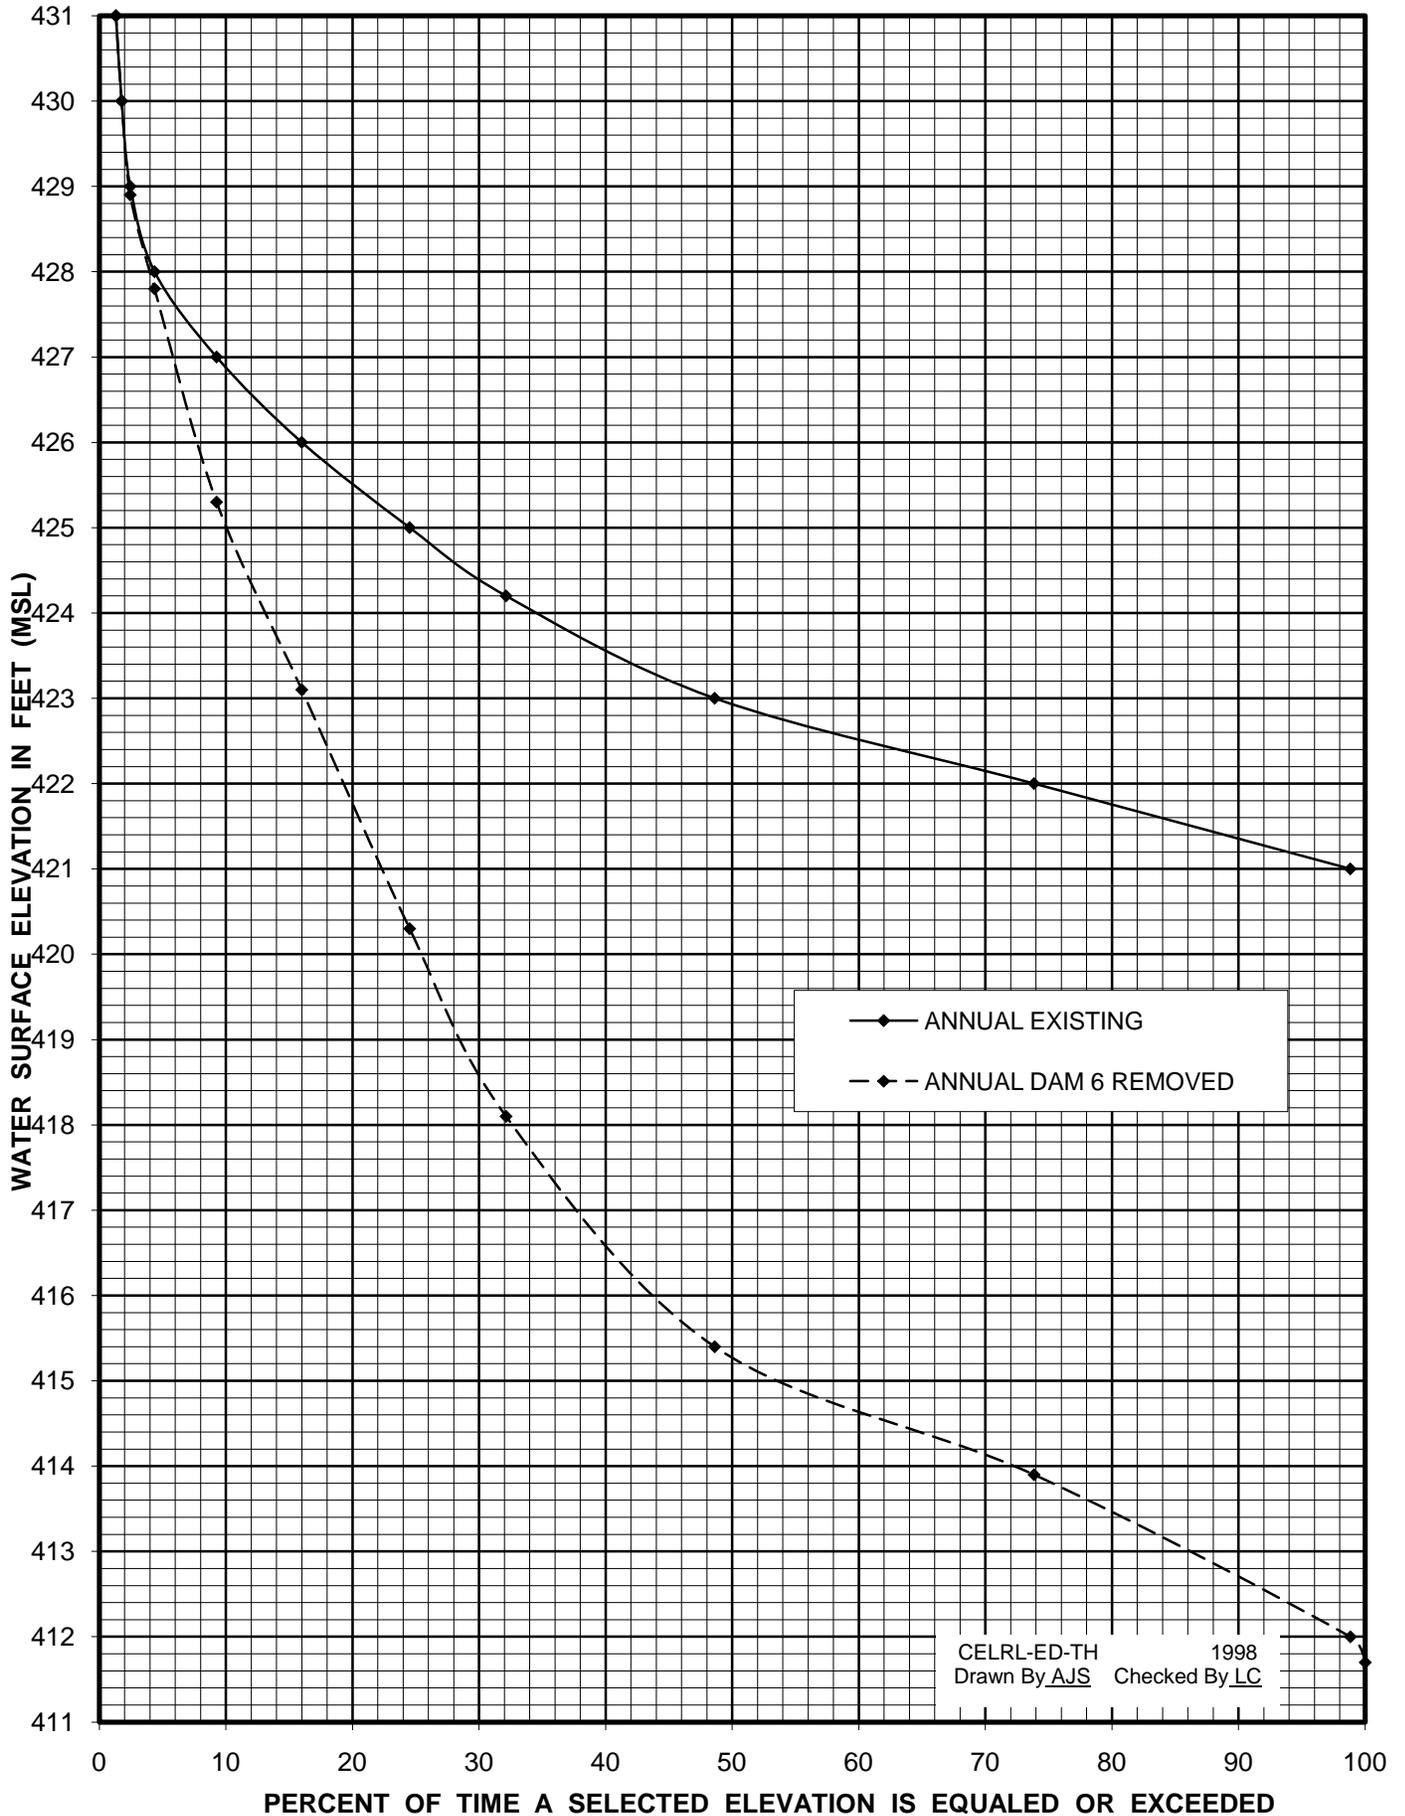


CELRL-ED-TH 1998  
Drawn By AJS Checked By LC

# GREEN RIVER AT MILE 197 - HYPOTHETICAL GAGE ELEVATION DURATION - (MAMMOTH CAVE AREA)

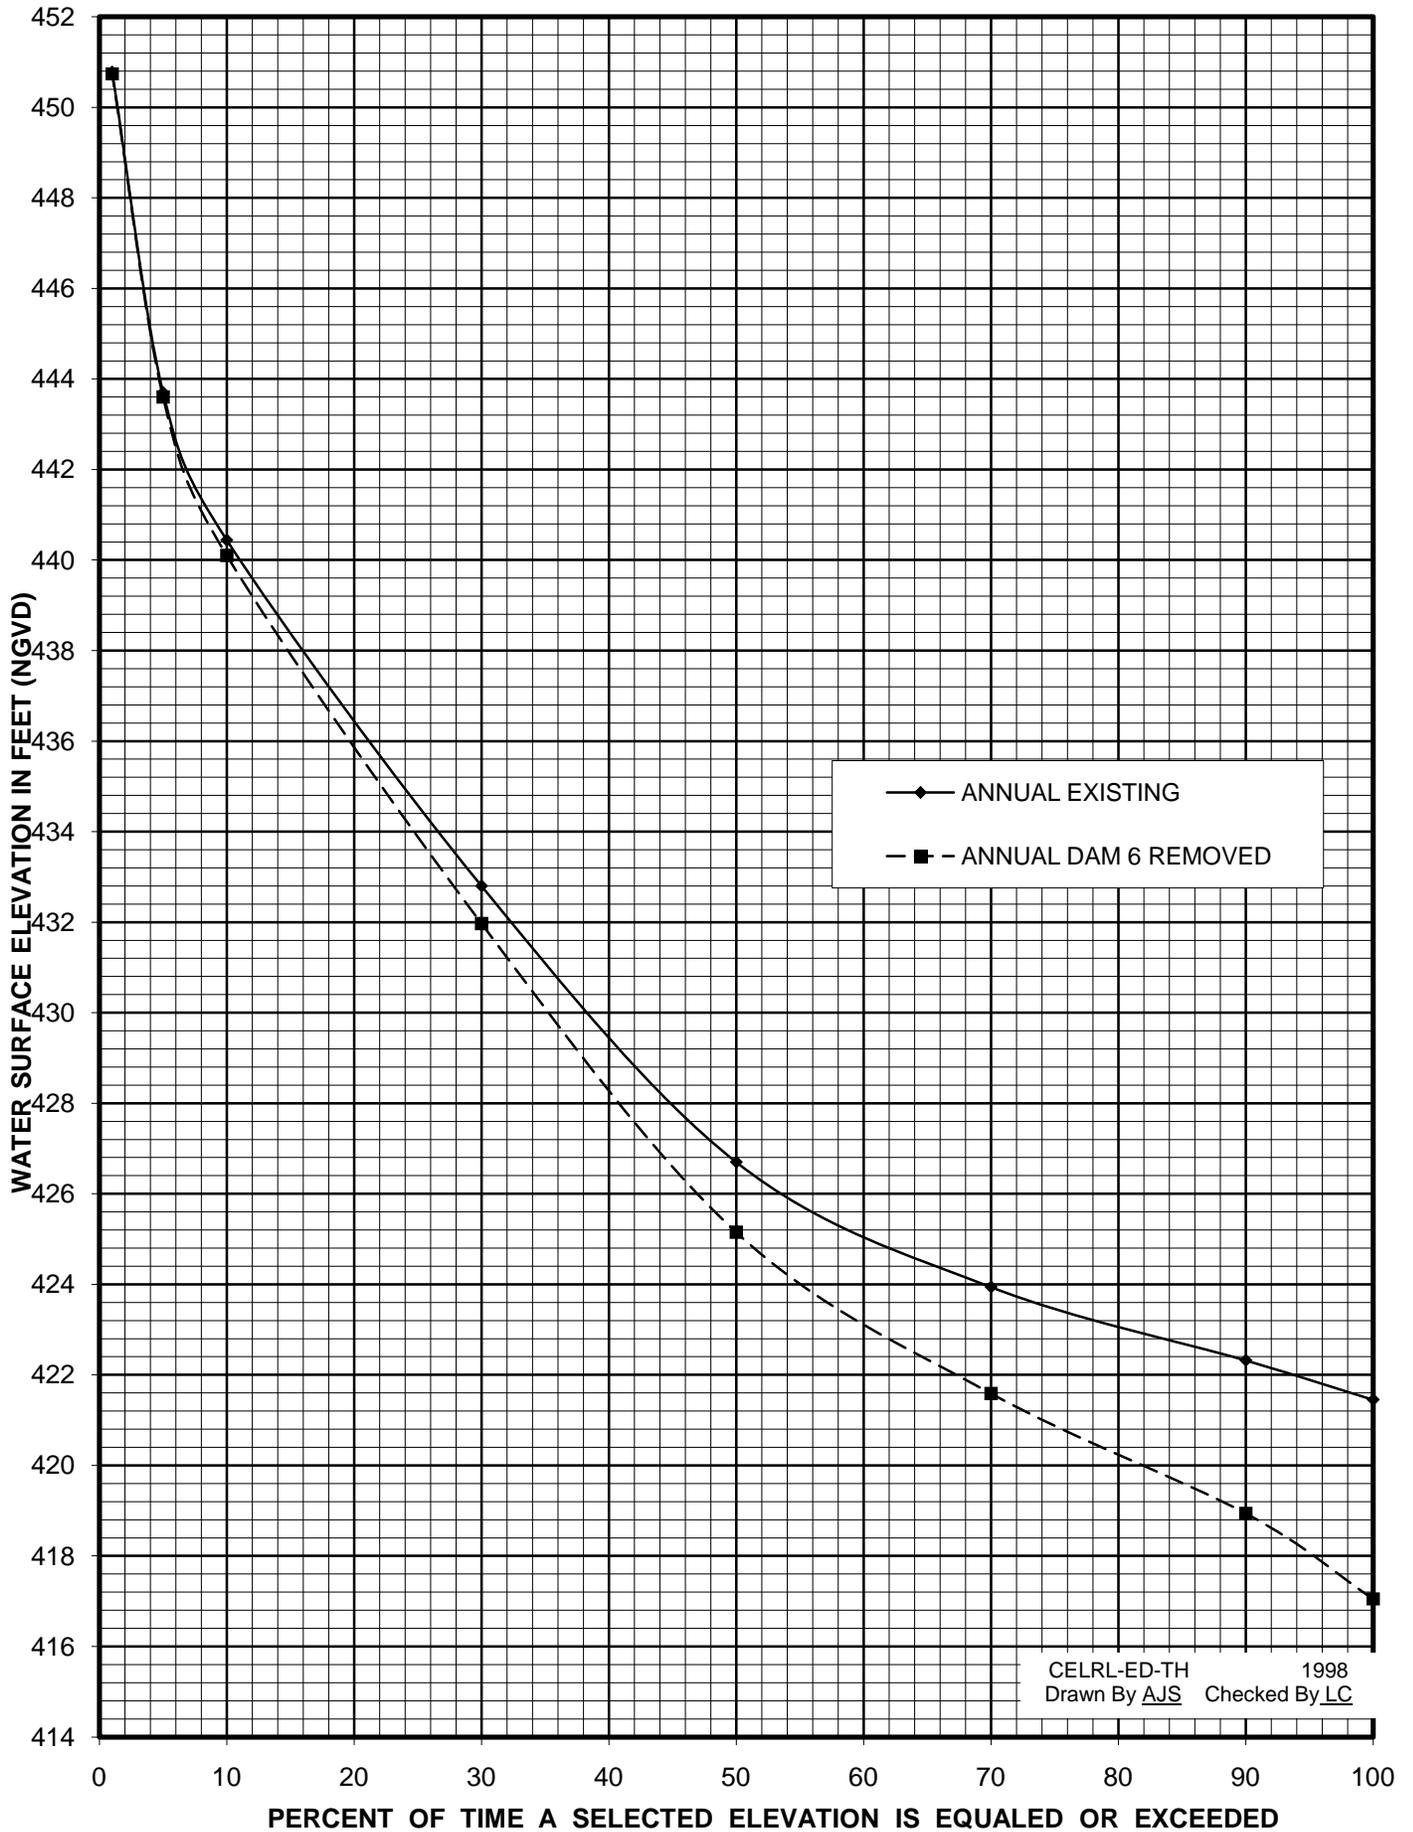


CELRL-ED-TH 1998  
Drawn By AJS Checked By LC

# NOILN RIVER AT KYROCK, KENTUCKY ELEVATION DURATION

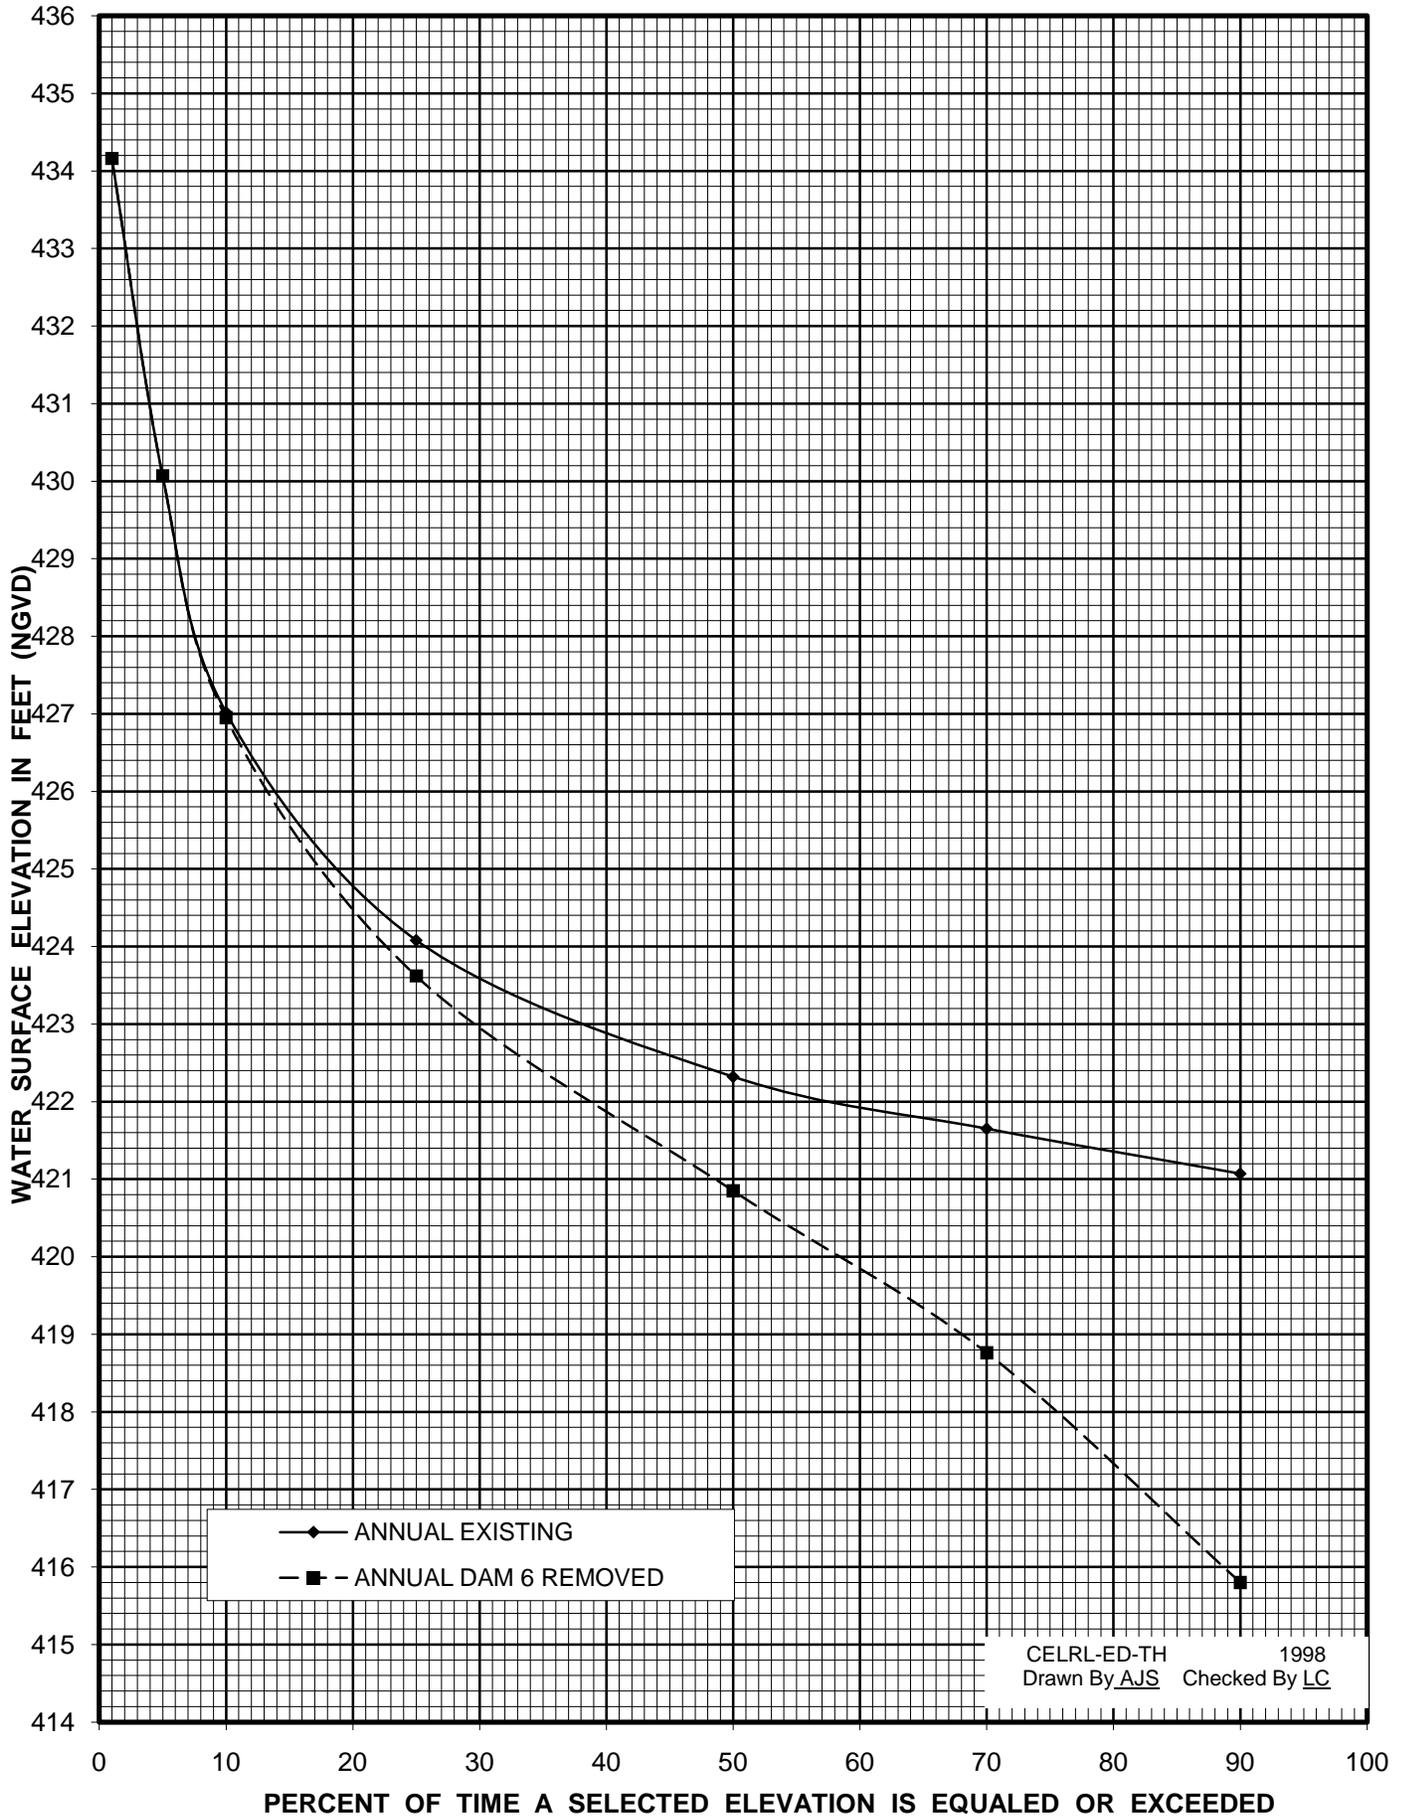


CELRL-ED-TH 1998  
Drawn By AJS Checked By LC


GREEN RIVER AT MUNFORDVILLE, KENTUCKY  
DISCHARGE DURATION

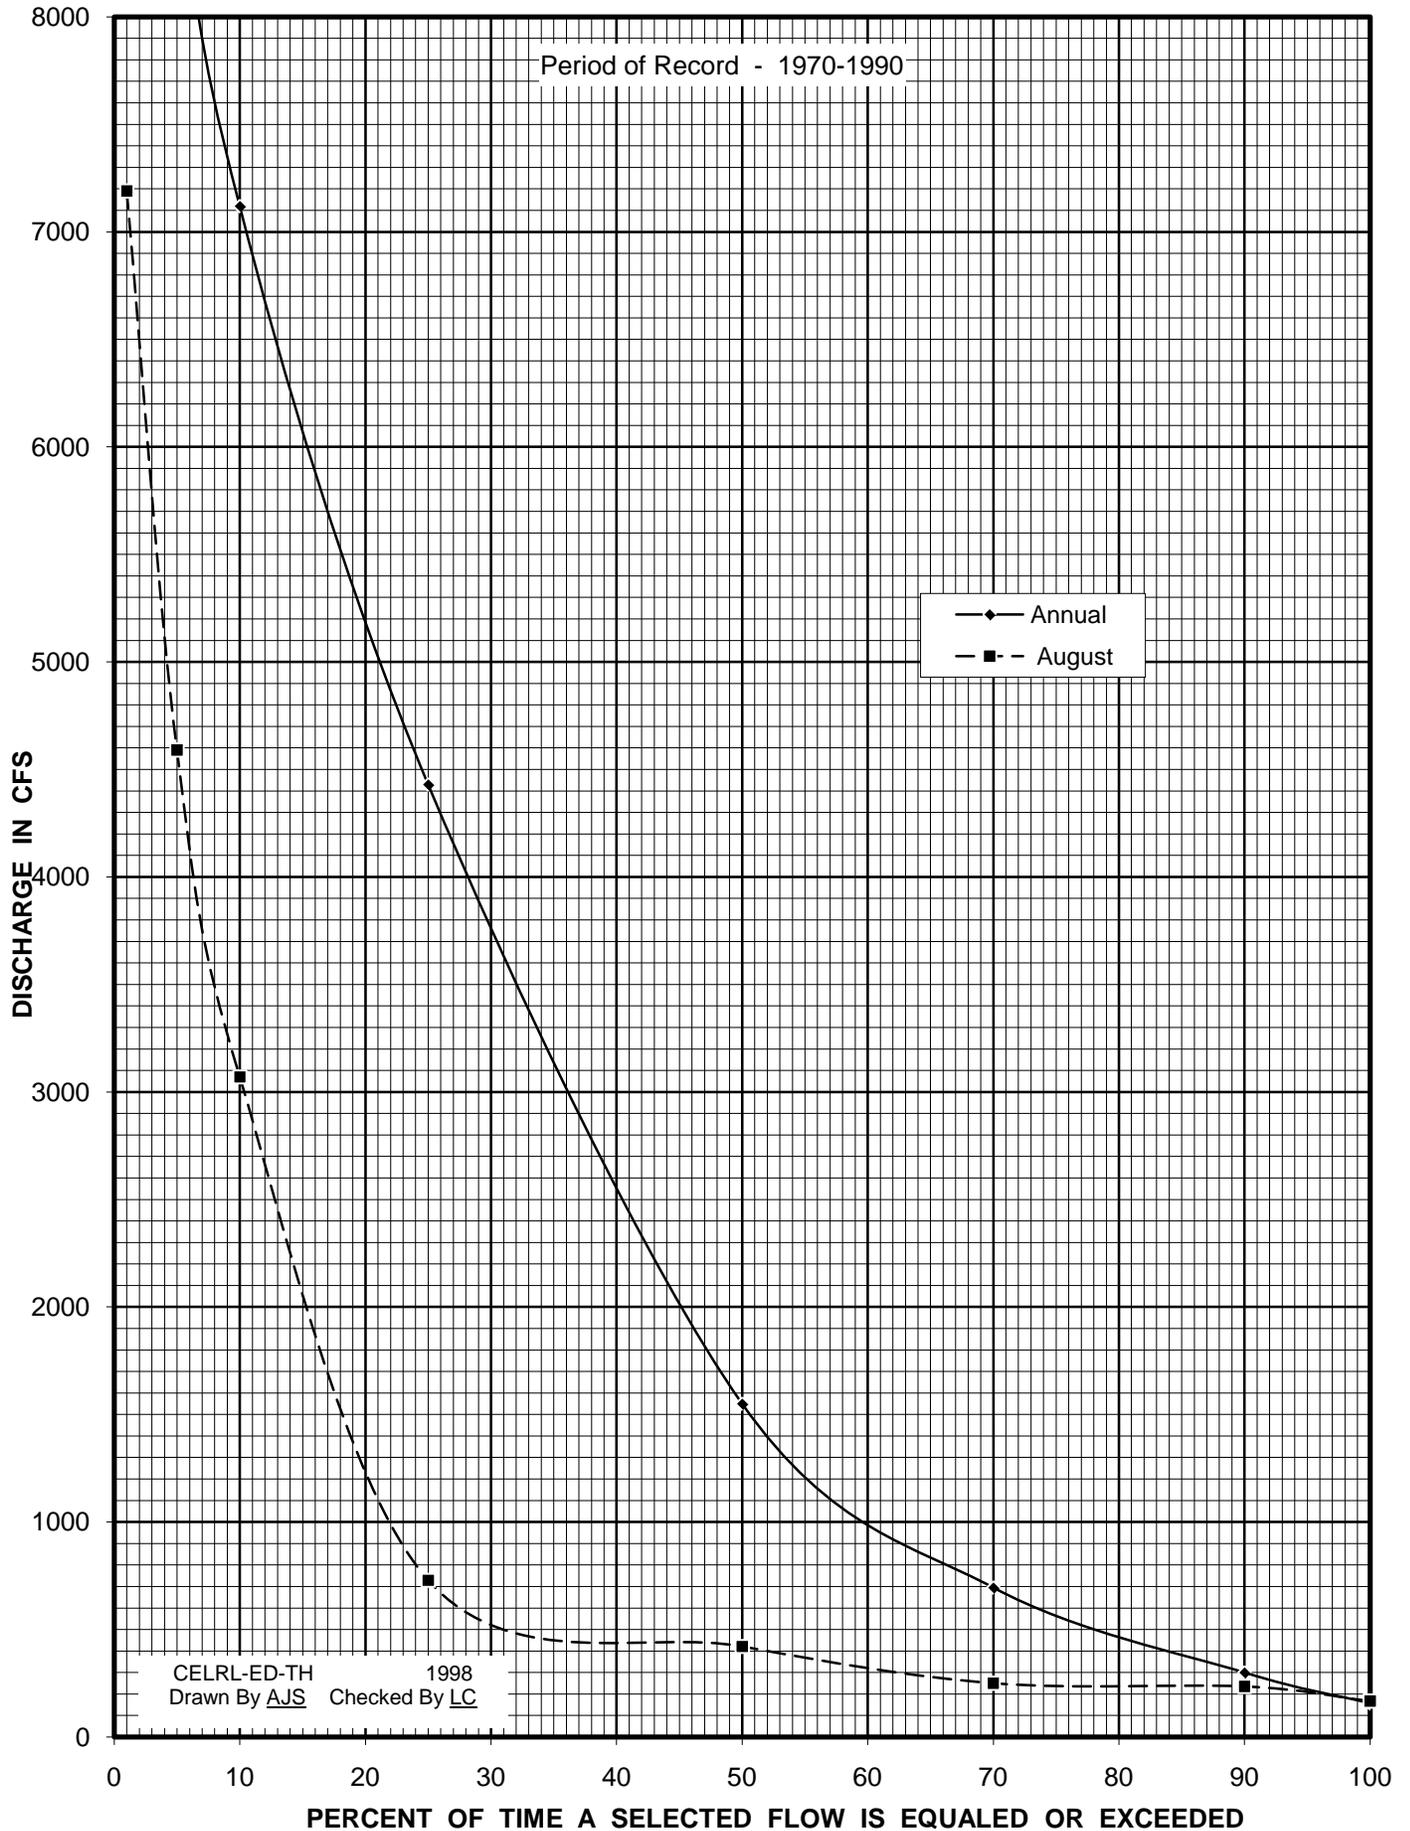


# NOILN RIVER AT KYROCK, KENTUCKY DISCHARGE DURATION

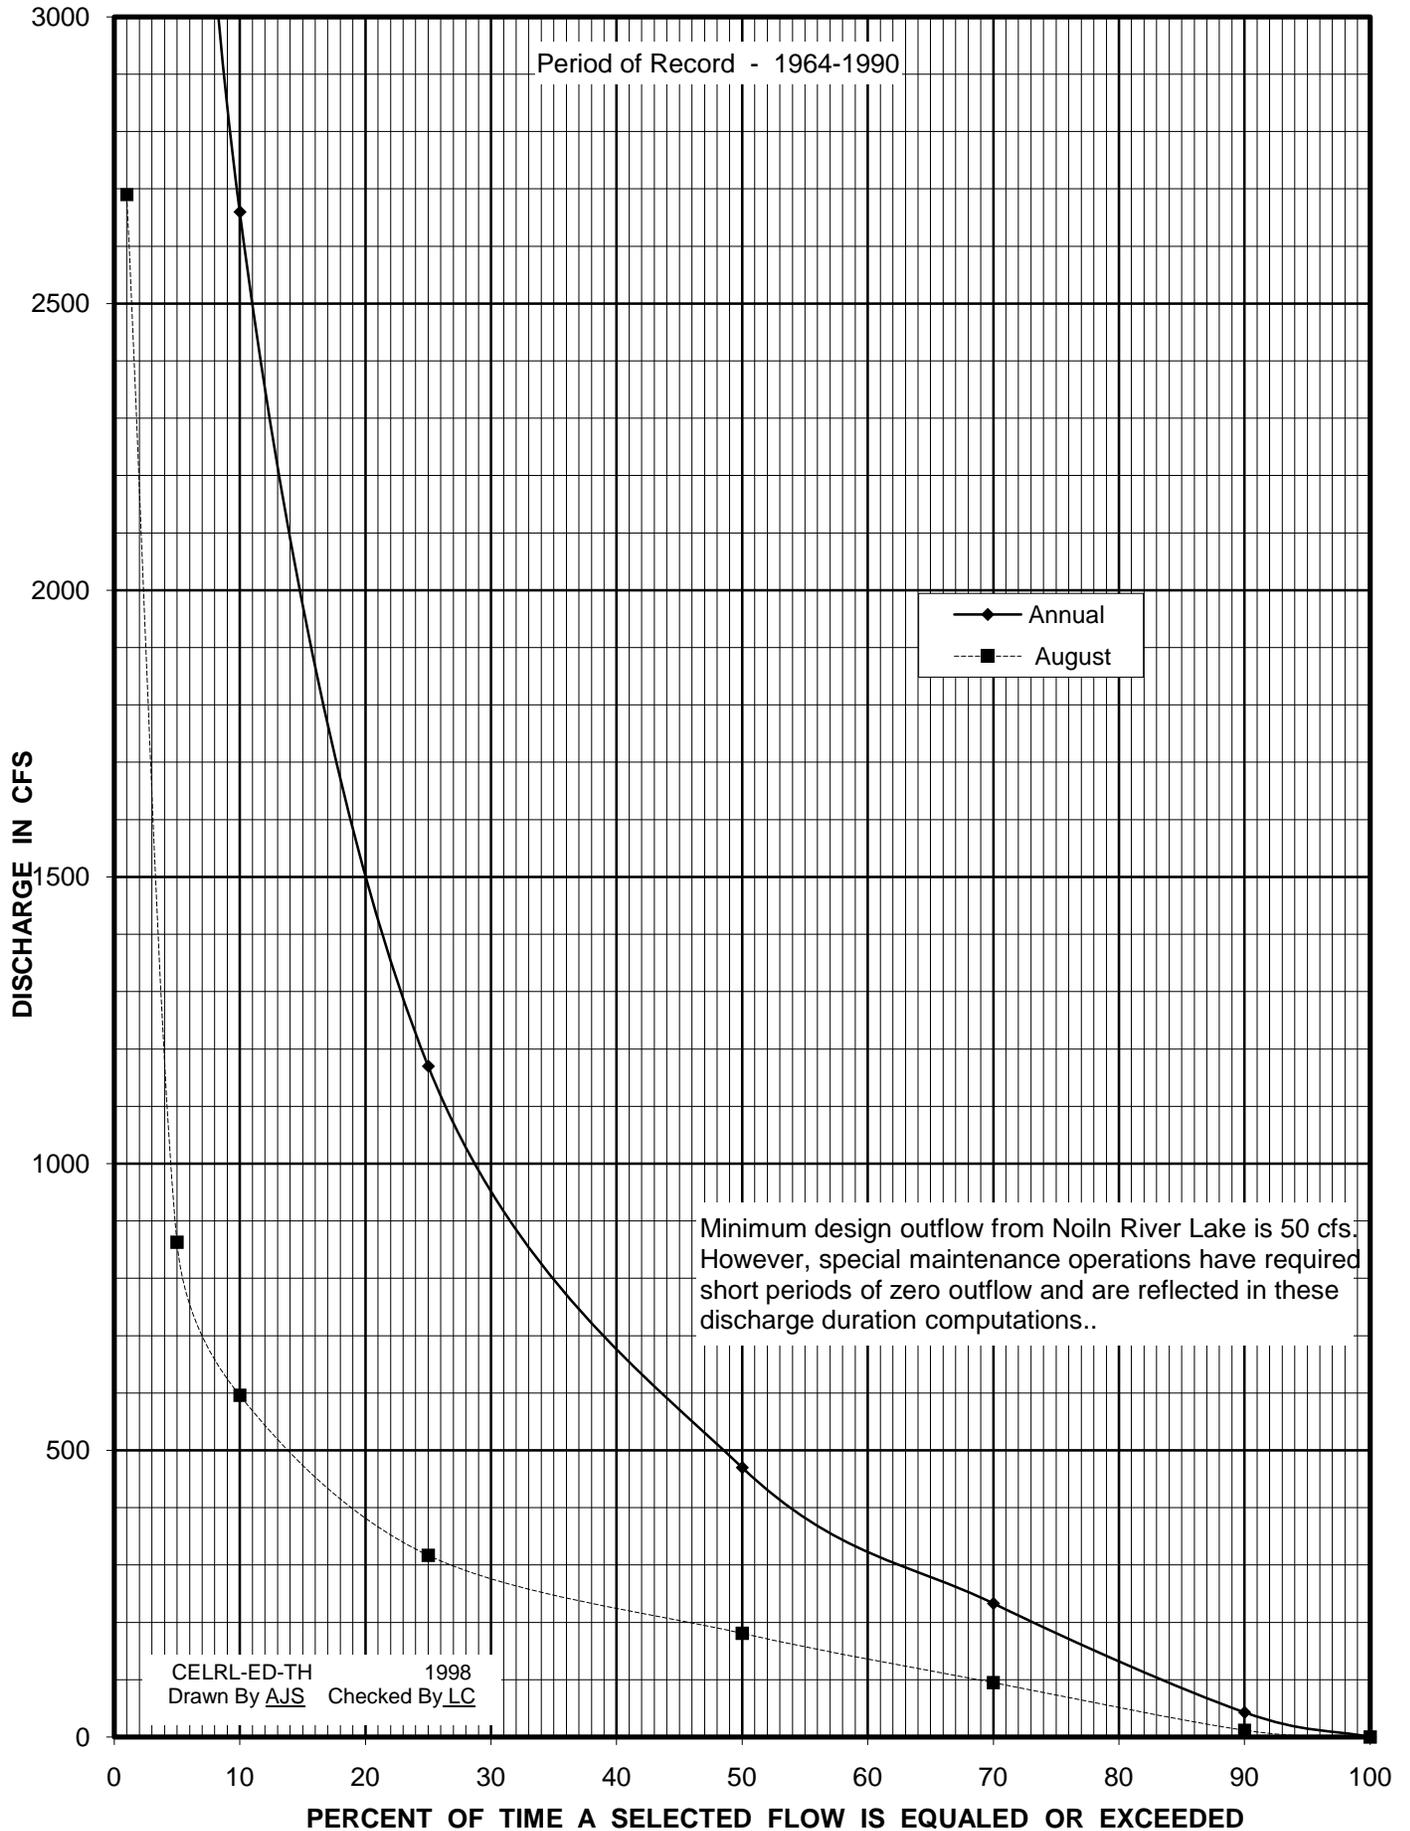


# GREEN RIVER AT BROWNSVILLE - LOCK 6, KENTUCKY DISCHARGE DURATION

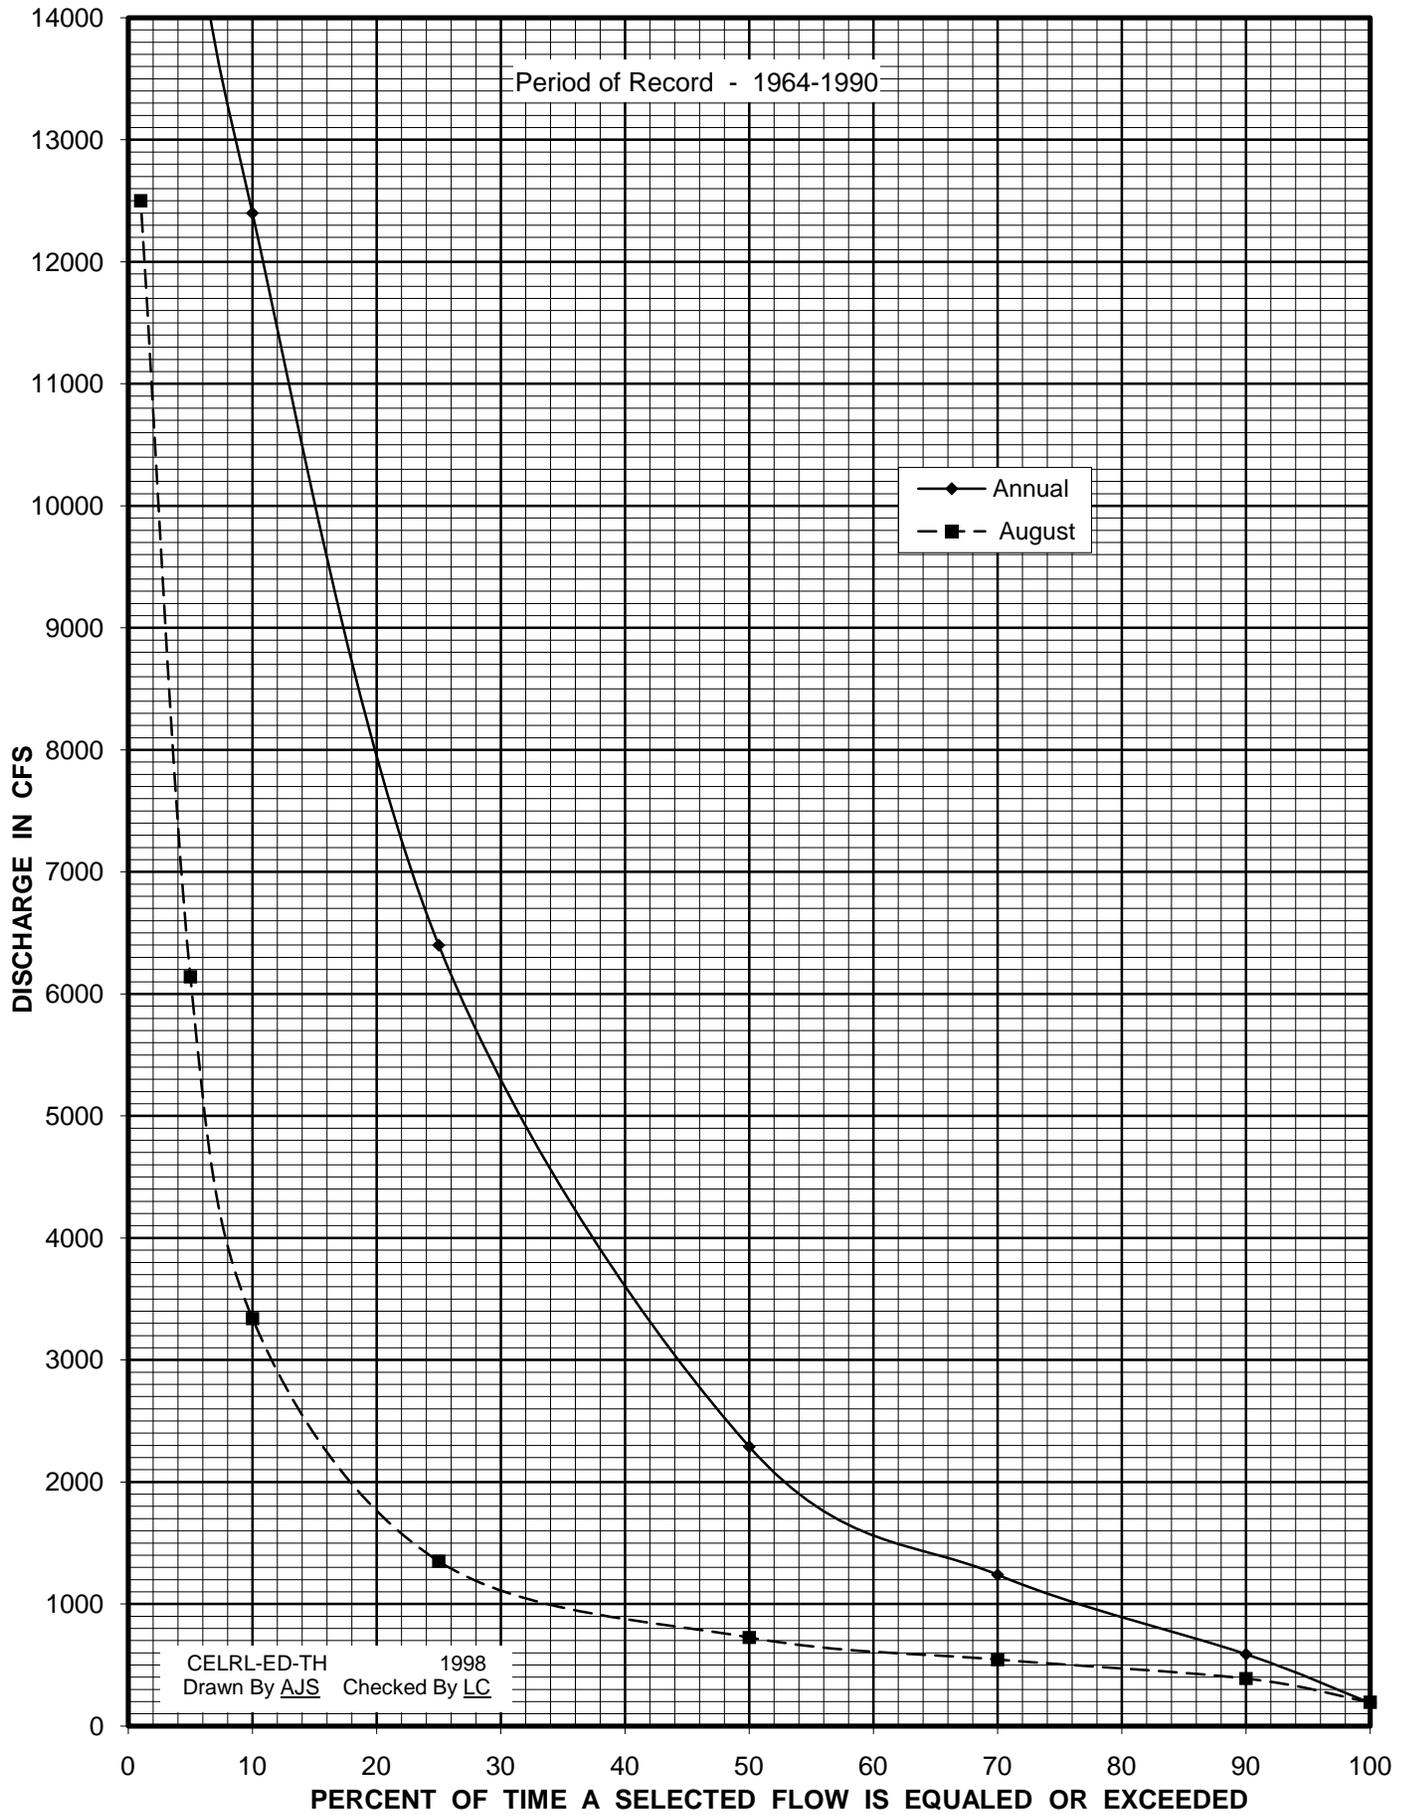

# BARREN RIVER AT BOWLING GREEN, KENTUCKY DISCHARGE DURATION

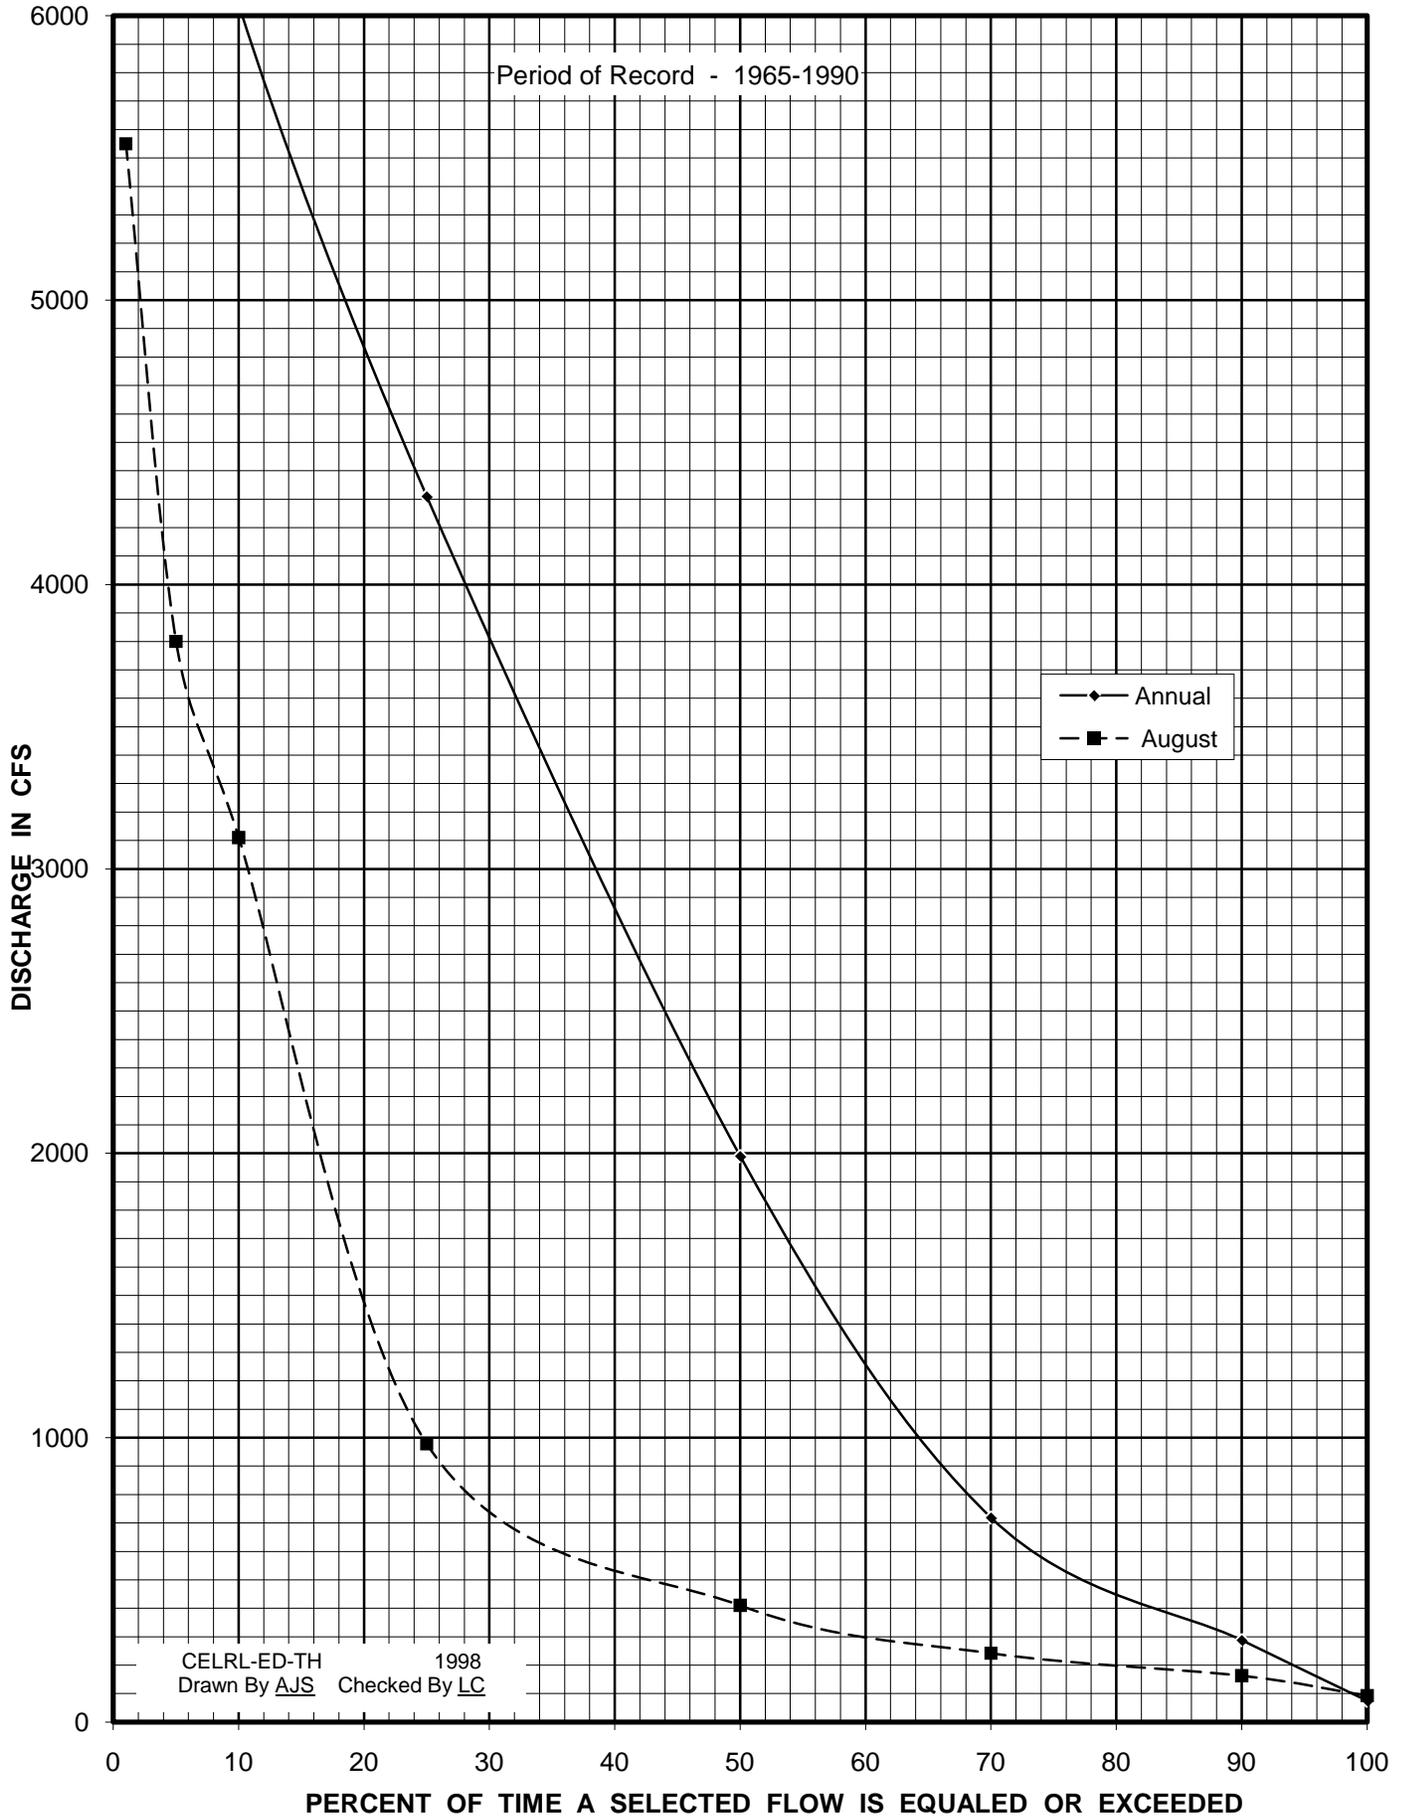


# GREEN RIVER AT WOODBURY - LOCK 4, KENTUCKY DISCHARGE DURATION

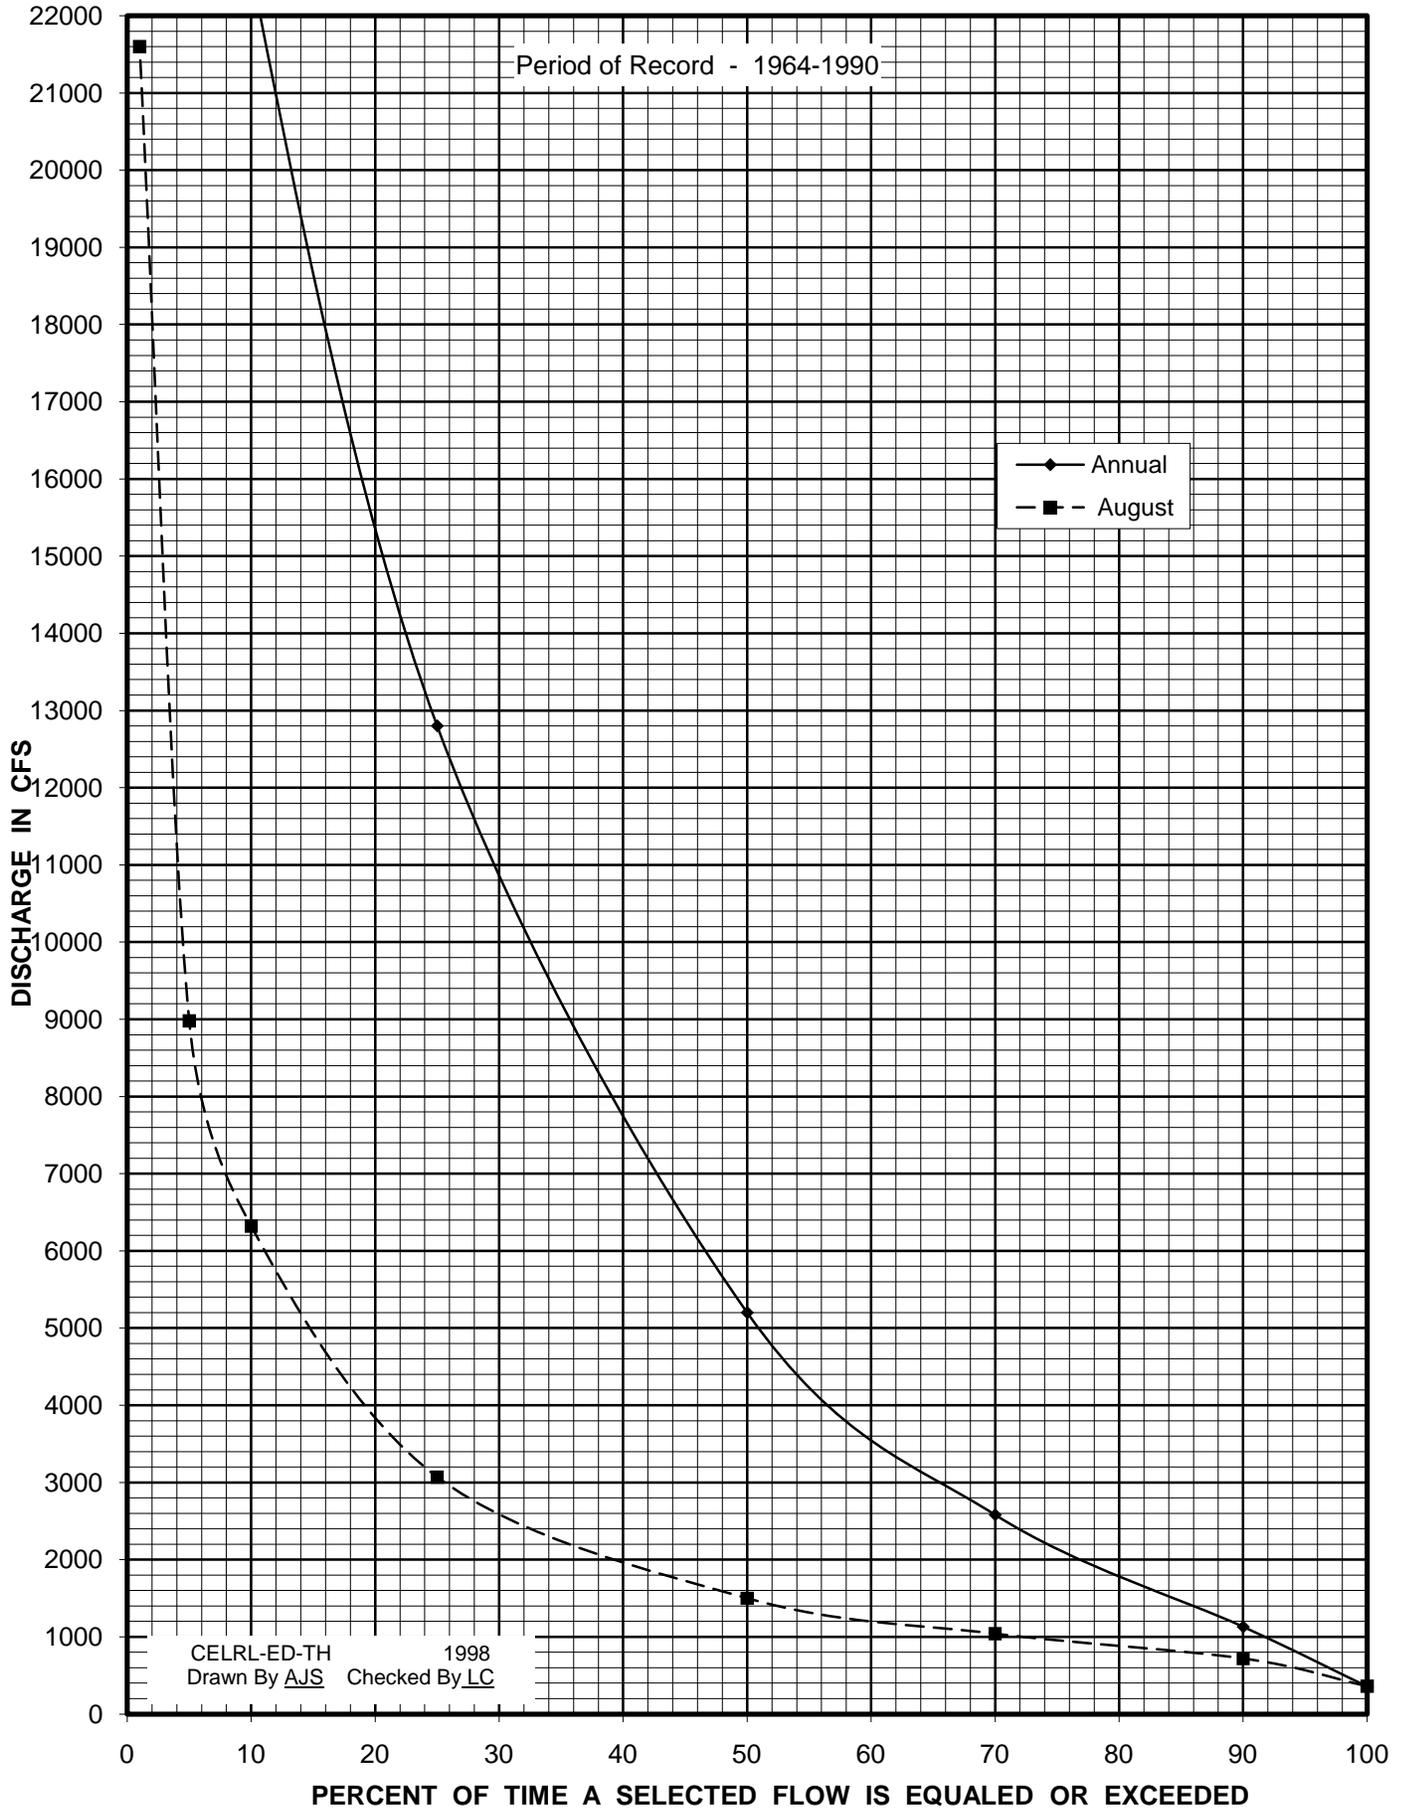





# GREEN RIVER AT CALHOUN - LOCK 2, KENTUCKY

## DISCHARGE DURATION

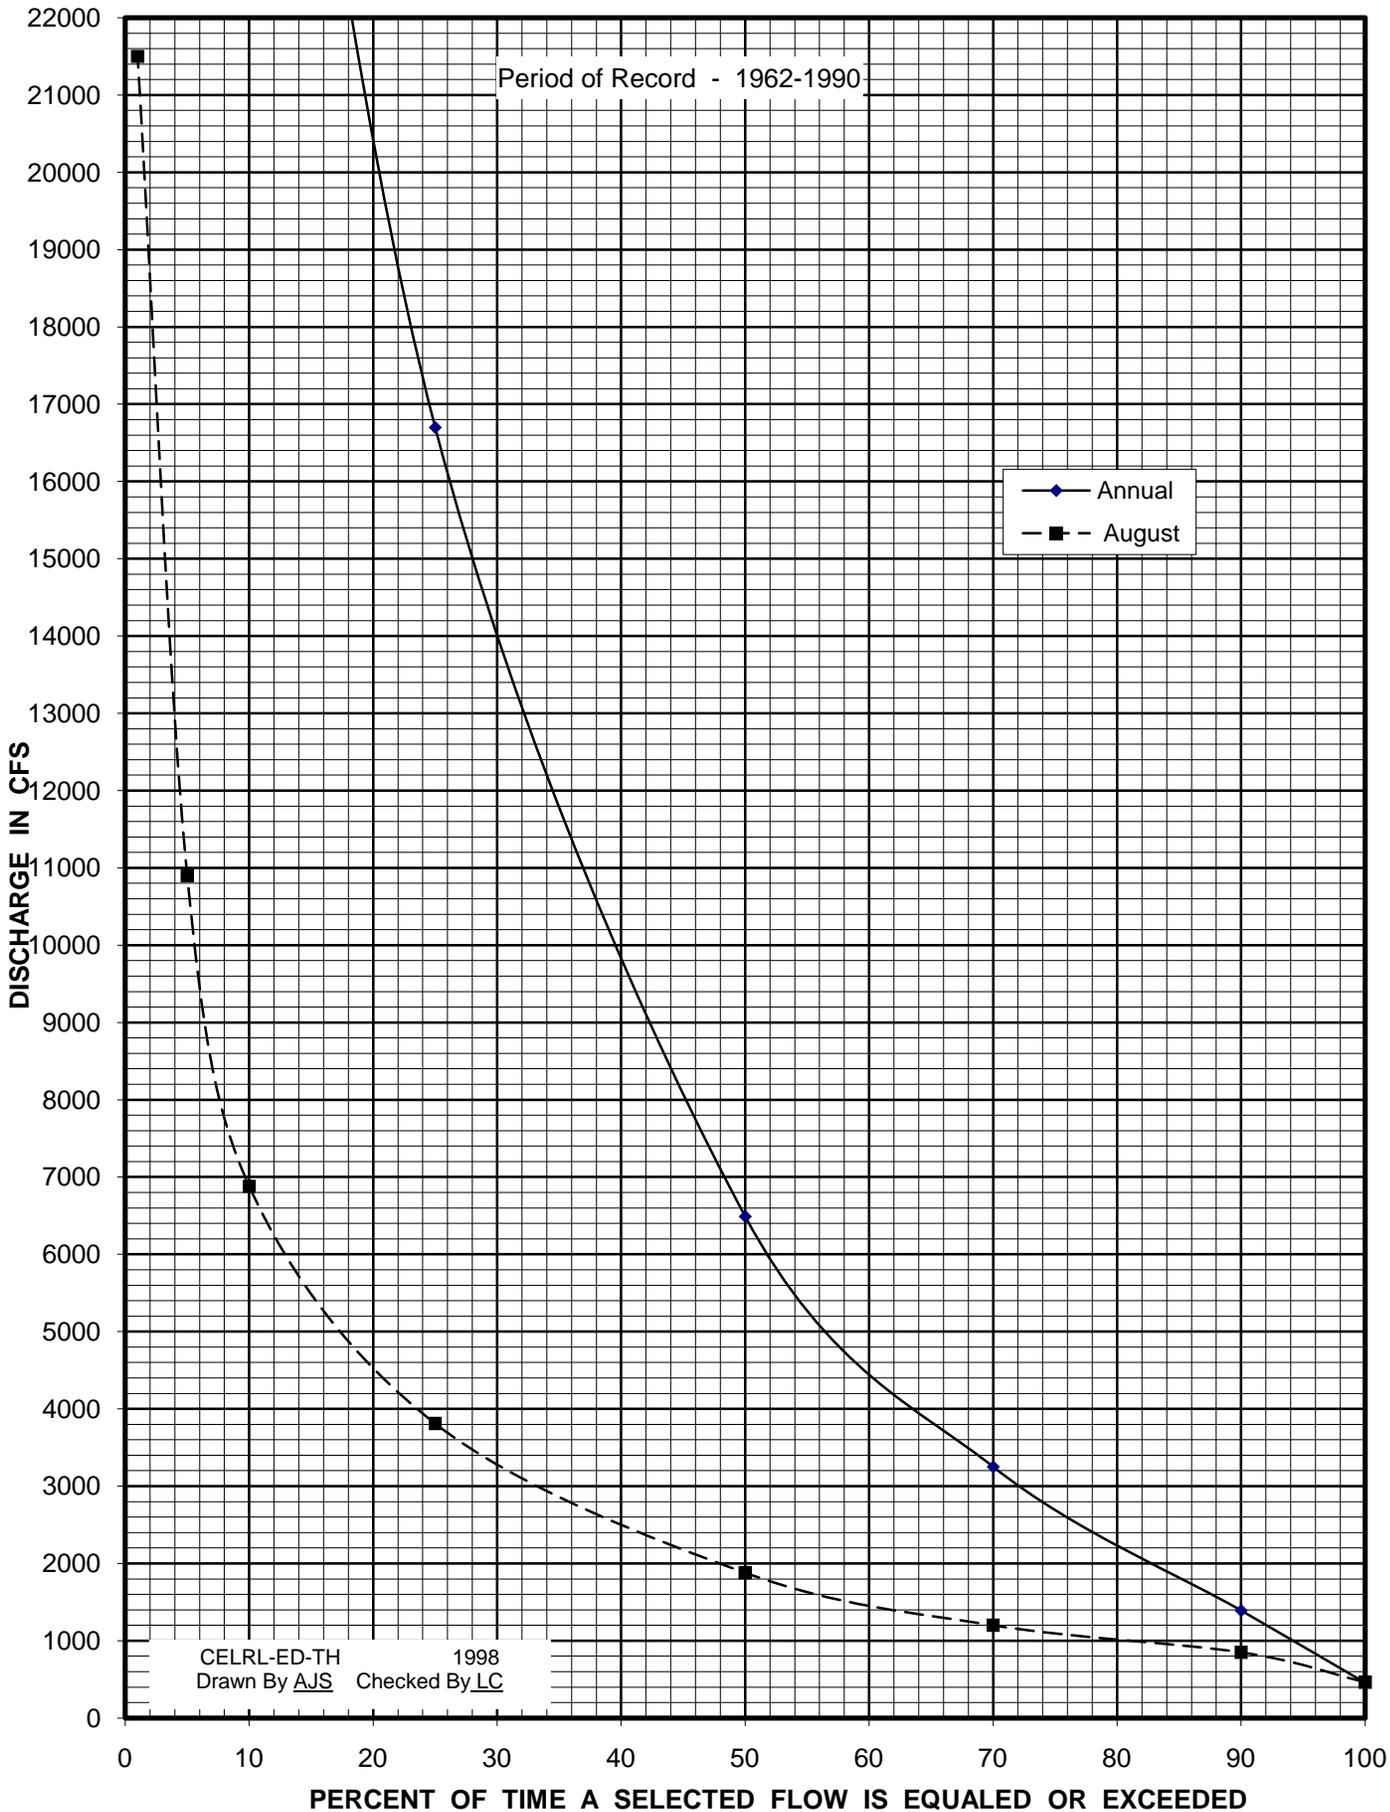

CELRL-ED-TH 1998  
 Drawn By AJS Checked By LC

5 4 3 2 1

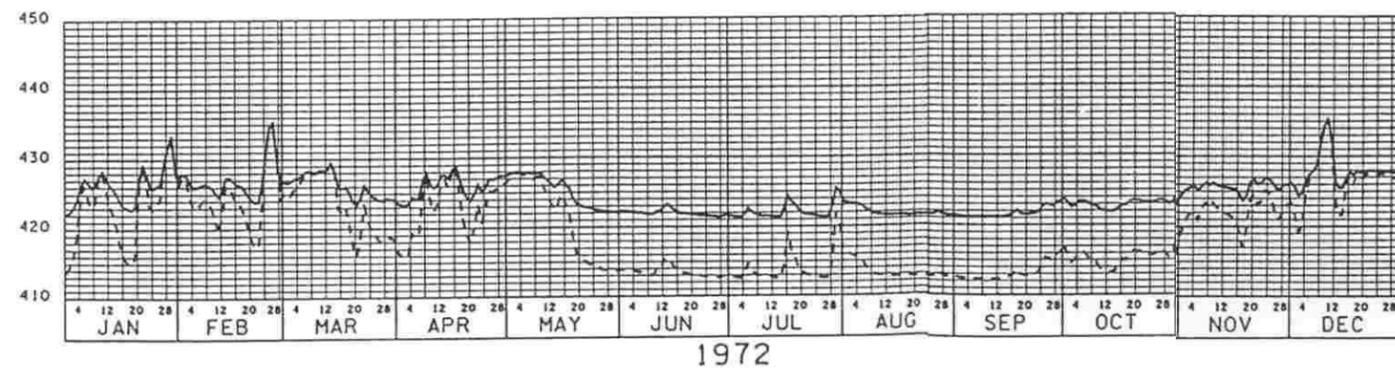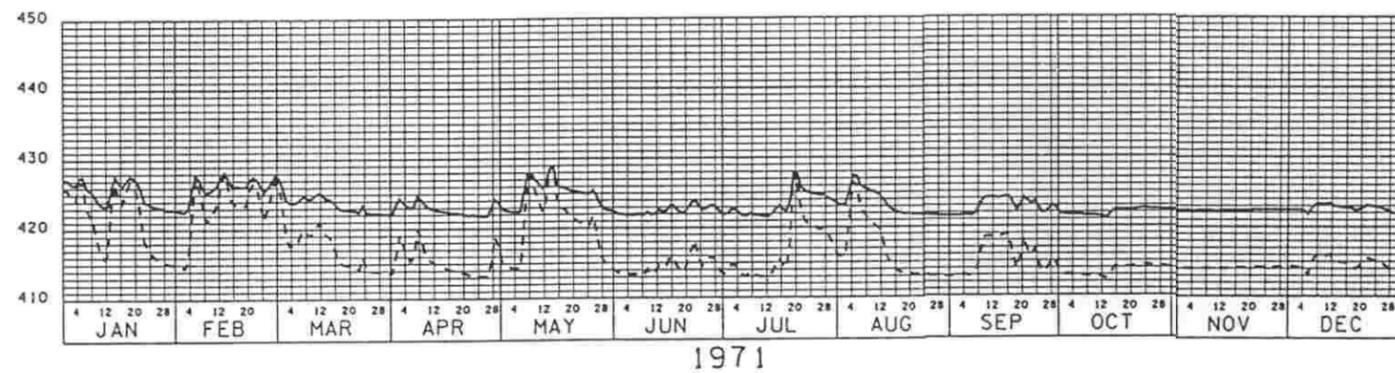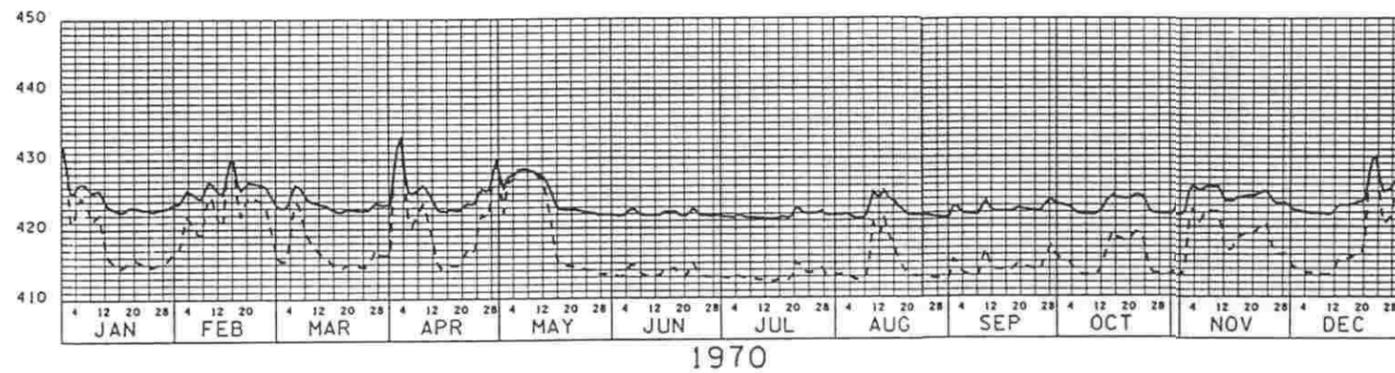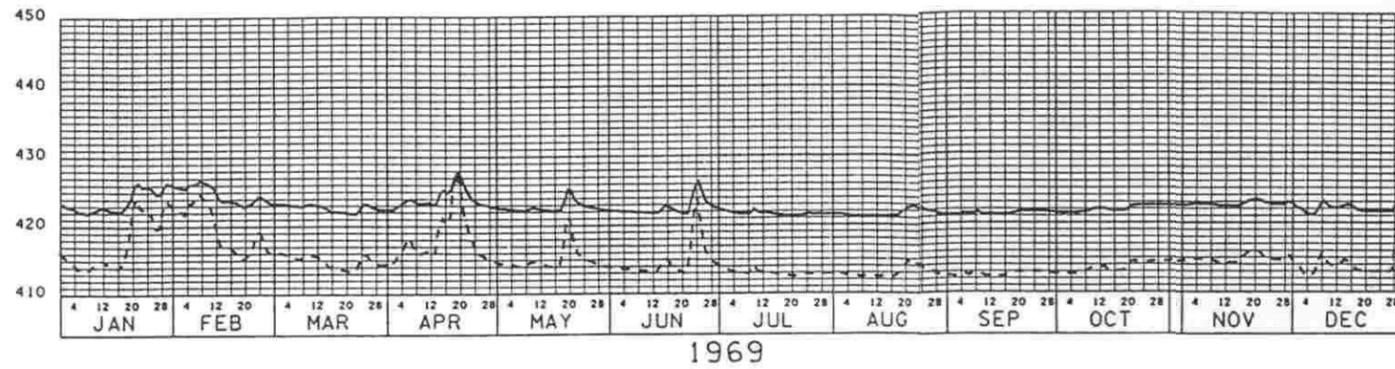

**LEGEND:**


- EXISTING CONDITION
- - - - - DAM REMOVED

Revisions			
Symbol	Descriptions	Date	Approved


U.S. ARMY ENGINEER DISTRICT  
CORPS OF ENGINEERS  
LOUISVILLE, KENTUCKY

Designed by:	<b>GREEN RIVER BROWNSVILLE, KY</b>						
Drawn by:							
Checked by:							
Reviewed by:							
Approved by:	<table border="1"> <tr> <td>Scale:</td> <td>Sheet Reference Number:</td> </tr> <tr> <td>Date:</td> <td> </td> </tr> <tr> <td>Drawing Code:</td> <td>Sheet _____ of _____</td> </tr> </table>	Scale:	Sheet Reference Number:	Date:		Drawing Code:	Sheet _____ of _____
Scale:	Sheet Reference Number:						
Date:							
Drawing Code:	Sheet _____ of _____						


5 4 3 2 1

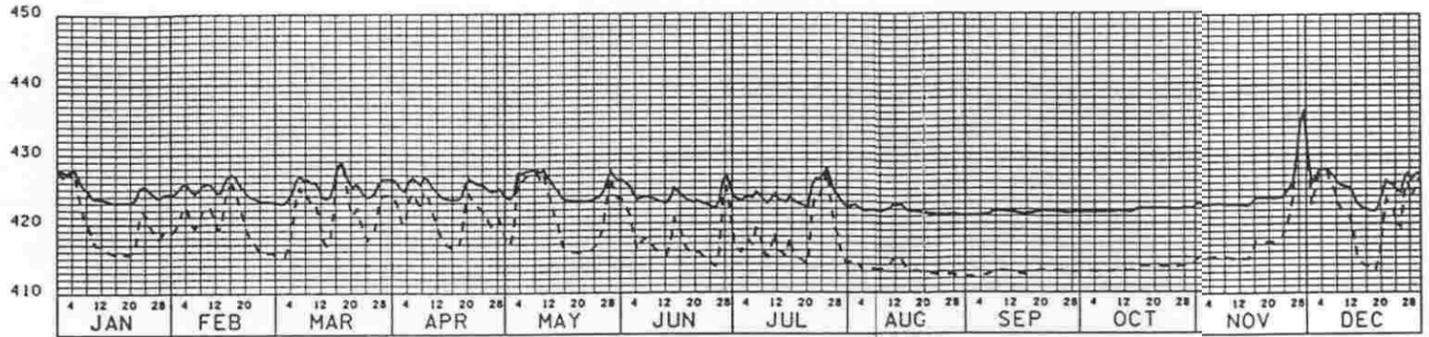


1973

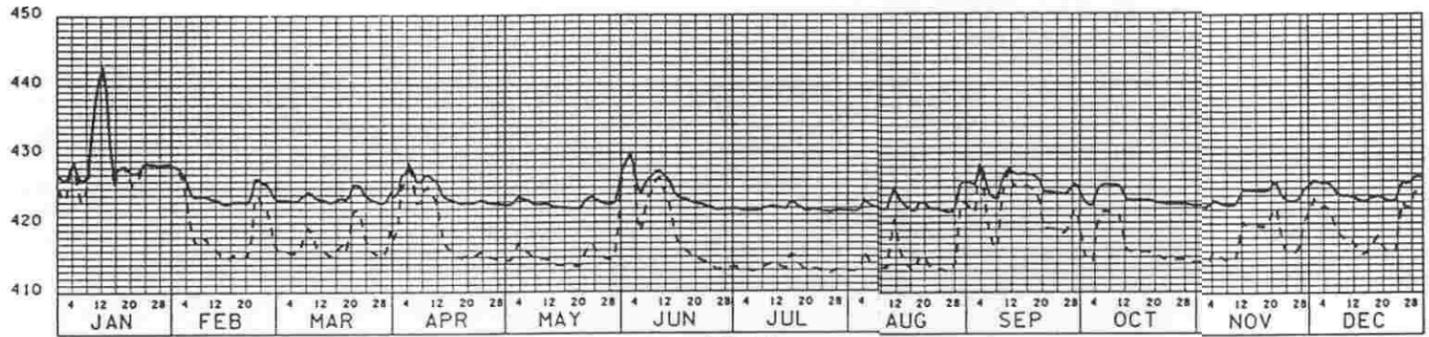

1974

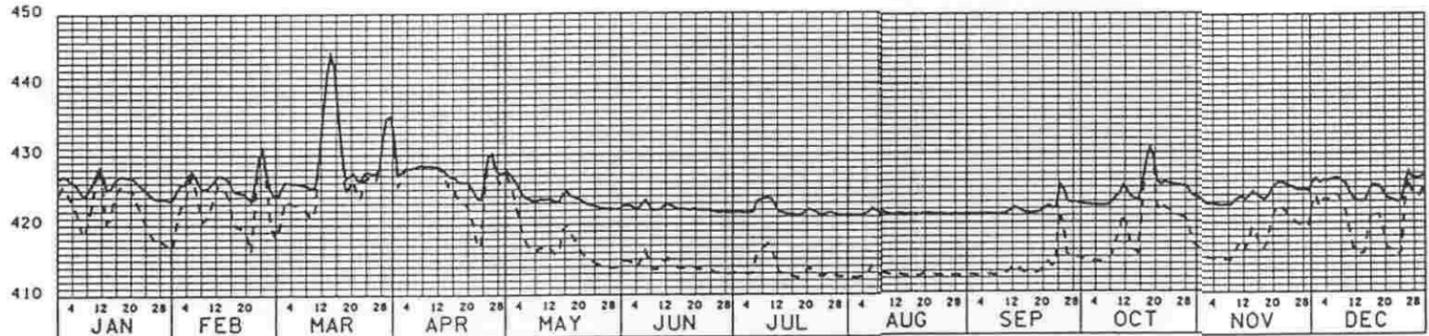

1975

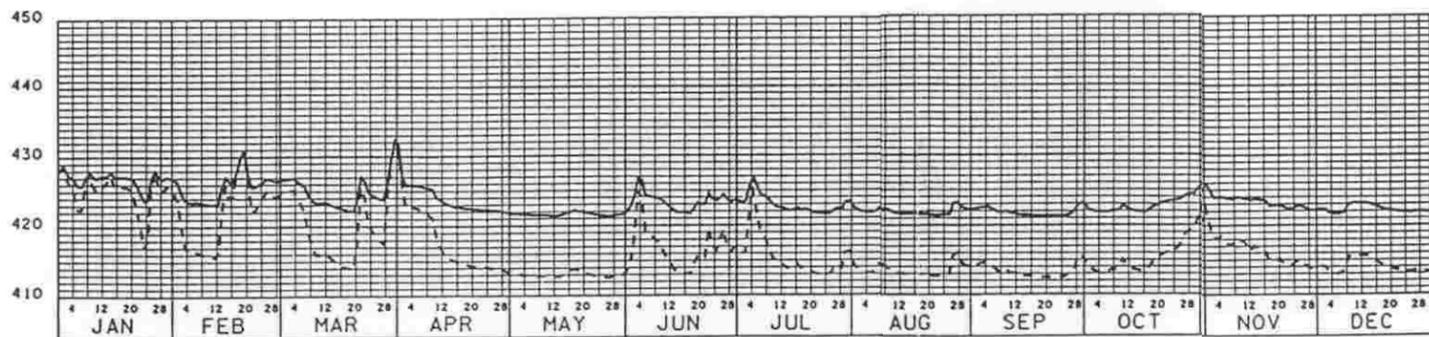

1976

**LEGEND:**

- EXISTING CONDITION
- - - - - DAM REMOVED





Revisions			
Symbol	Descriptions	Date	Approved

U.S. ARMY ENGINEER DISTRICT  
CORPS OF ENGINEERS  
LOUISVILLE, KENTUCKY

Designed by:	<b>GREEN RIVER BROWNSVILLE, KY</b>
Drawn by:	
Checked by:	
Reviewed by:	
Approved by:	

Scale:	Sheet Reference Number:
Date:	Sheet _____ of _____
Drawing Code:	

D  
C  
B  
A

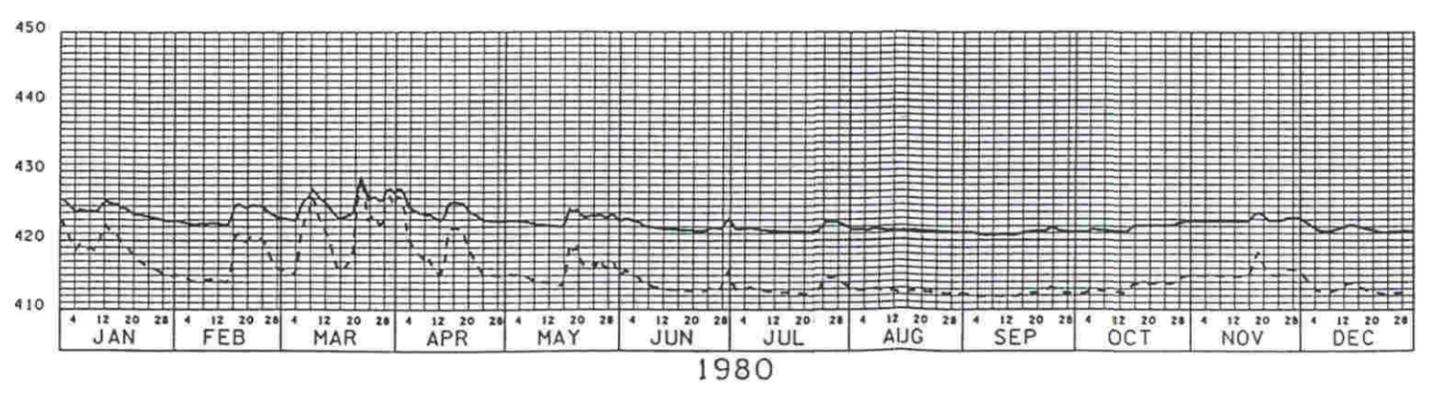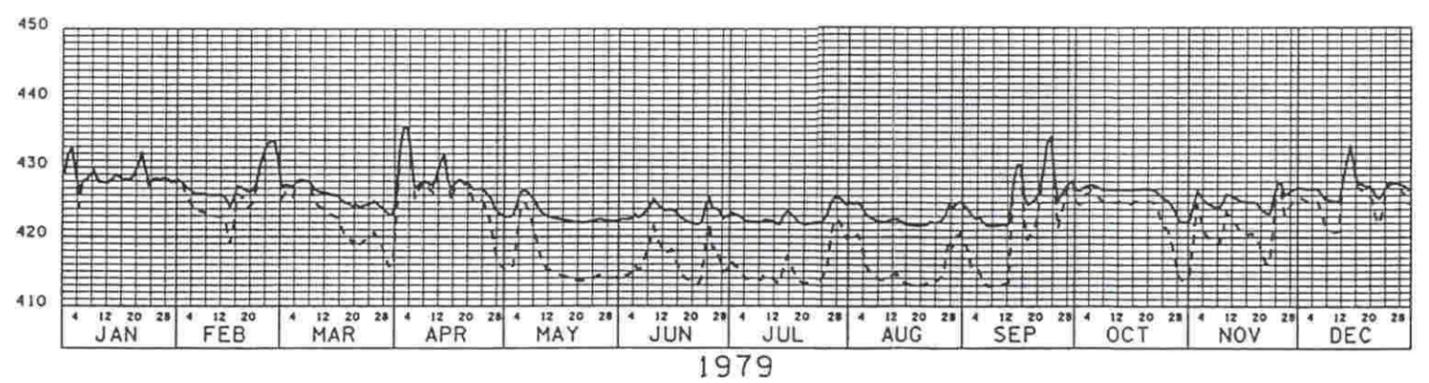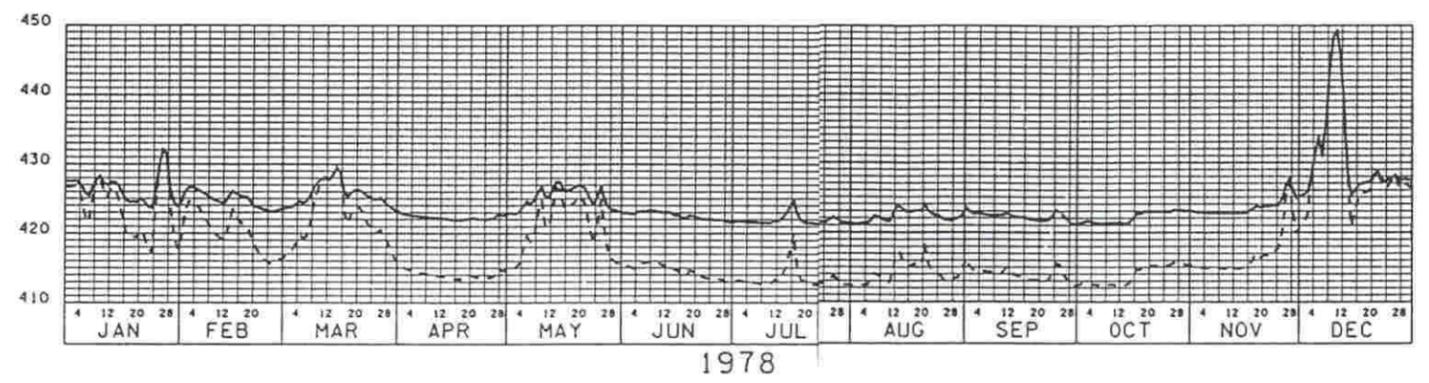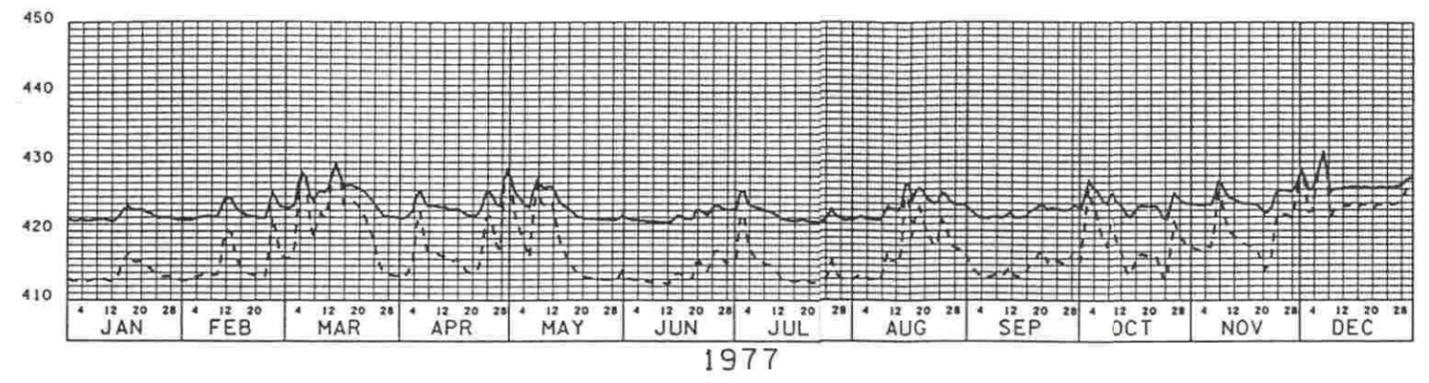

**LEGEND:**


- EXISTING CONDITION
- - - - - DAM REMOVED

Revisions			
Symbol	Descriptions	Date	Approved


U.S. ARMY ENGINEER DISTRICT  
CORPS OF ENGINEERS  
LOUISVILLE, KENTUCKY

Designed by:	<b>GREEN RIVER BROWNSVILLE, KY</b>
Drawn by:	
Checked by:	
Reviewed by:	
Approved by:	


Scales:	Sheet Reference Number:
Date:	Sheet _____ of _____
Drawing Code:	

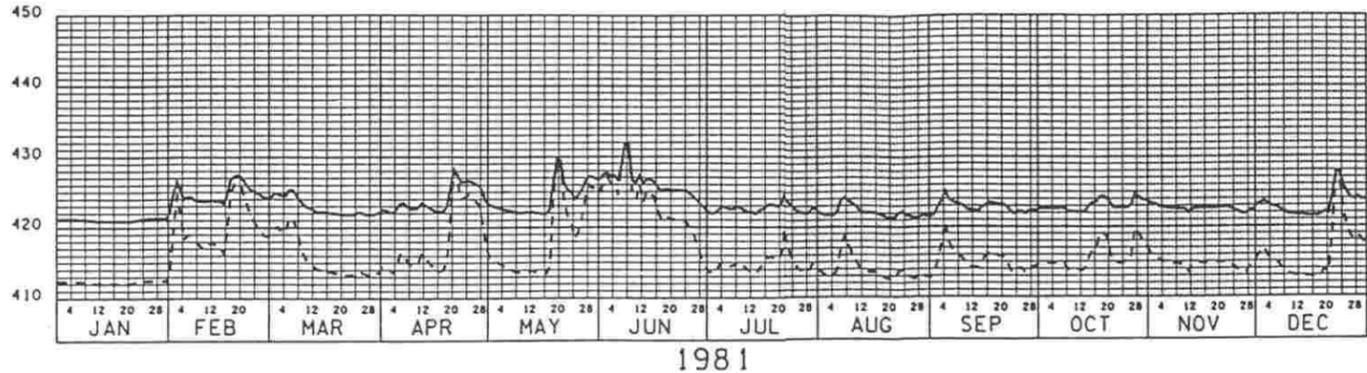


1981

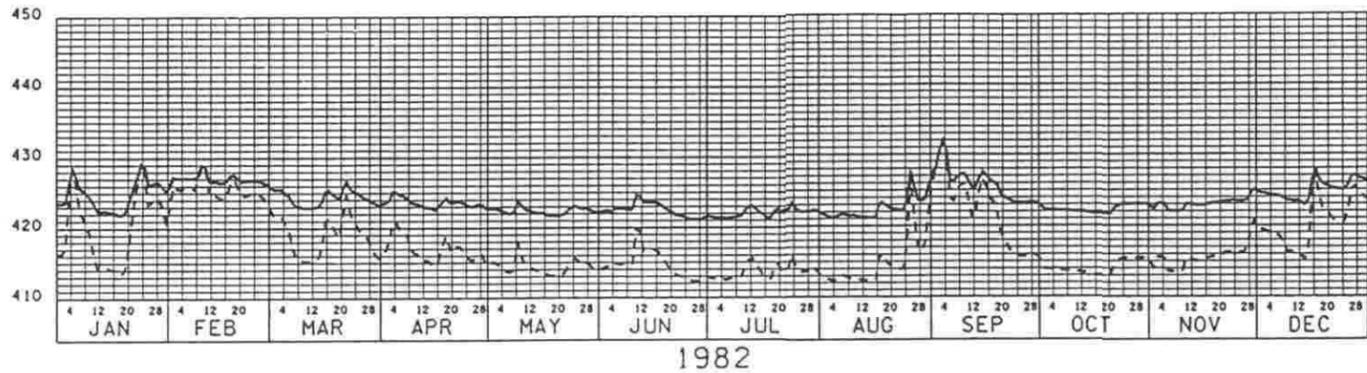

1982

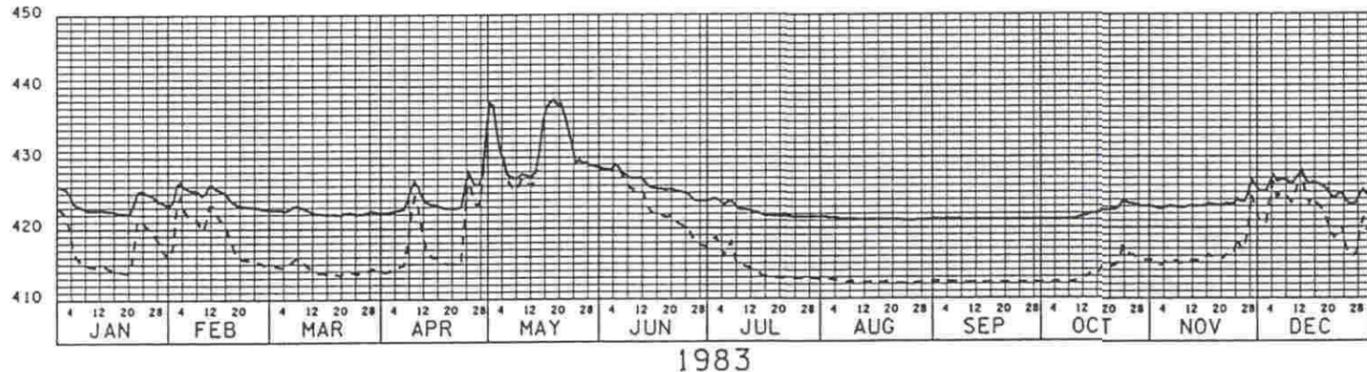

1983

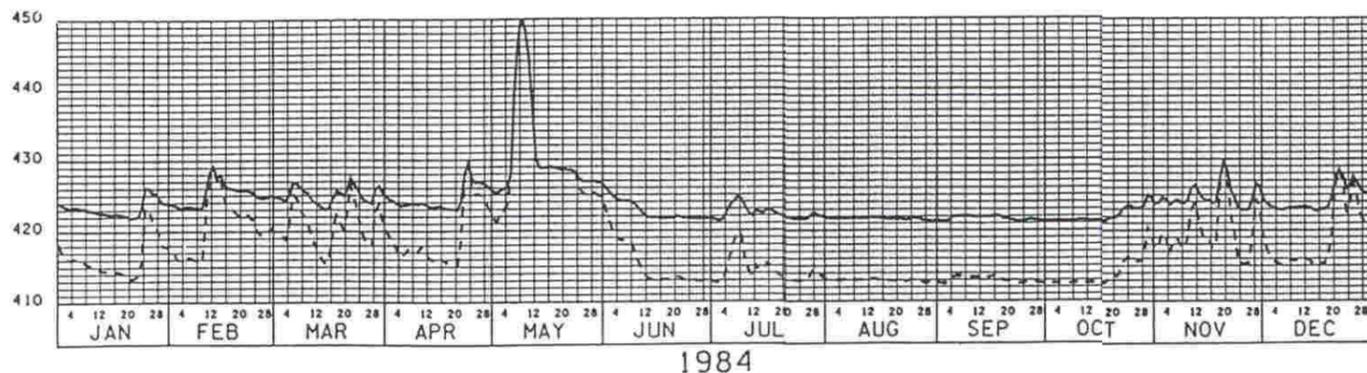

1984

**LEGEND:**

- EXISTING CONDITION
- - - - - DAM REMOVED

Revisions			
Symbol	Descriptions	Date	Approved

U.S. ARMY ENGINEER DISTRICT  
CORPS OF ENGINEERS  
LOUISVILLE, KENTUCKY

Designed by:	 <b>GREEN RIVER BROWNSVILLE, KY</b>						
Drawn by:							
Checked by:							
Reviewed by:							
Approved by:	<table border="1"> <tr> <td>Scale:</td> <td>Sheet Reference Number:</td> </tr> <tr> <td>Date:</td> <td>Sheet _____ of _____</td> </tr> <tr> <td>Drawing Code:</td> <td> </td> </tr> </table>	Scale:	Sheet Reference Number:	Date:	Sheet _____ of _____	Drawing Code:	
Scale:	Sheet Reference Number:						
Date:	Sheet _____ of _____						
Drawing Code:							

5

4

3

2





1

D

C

B

A

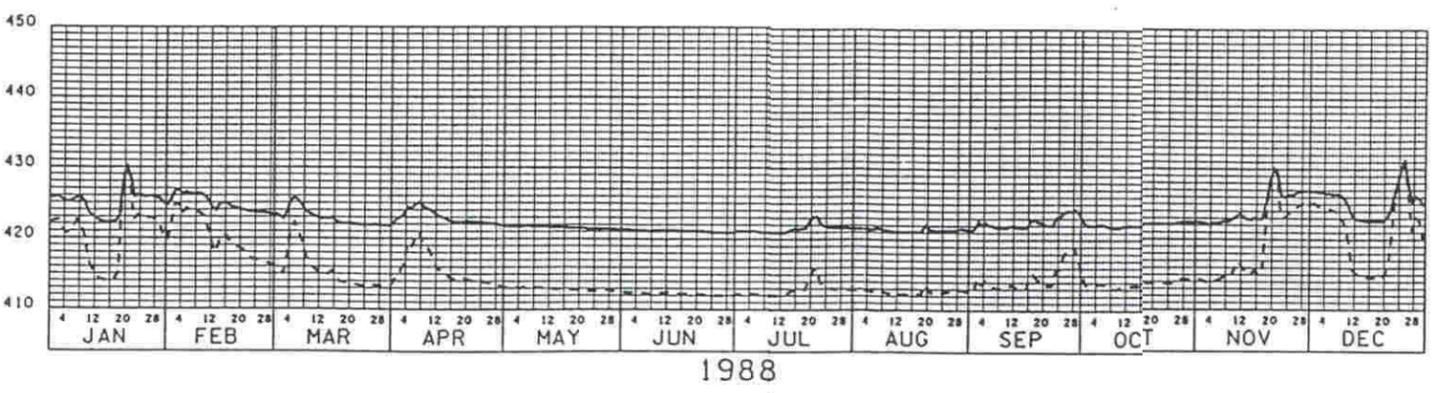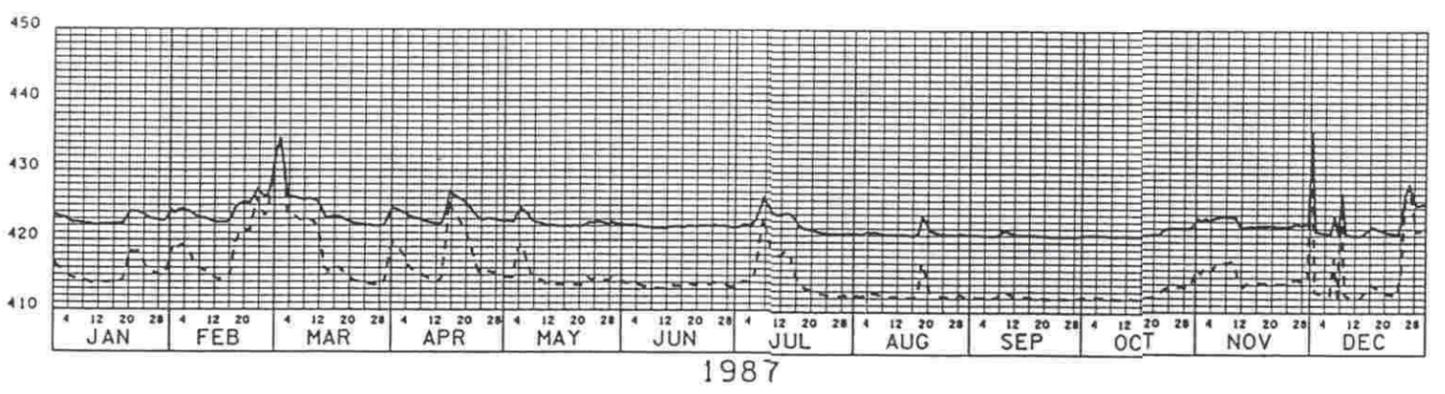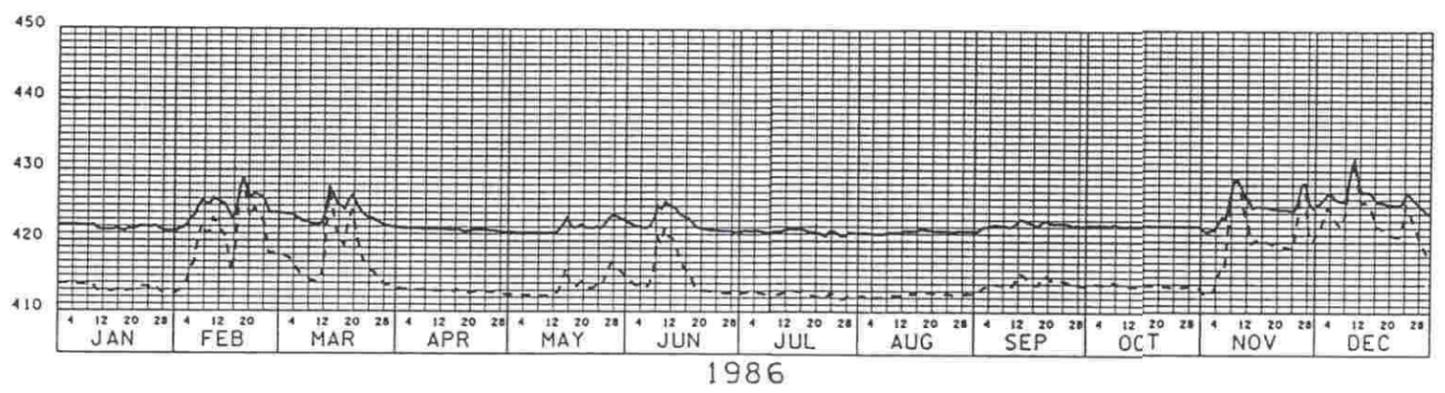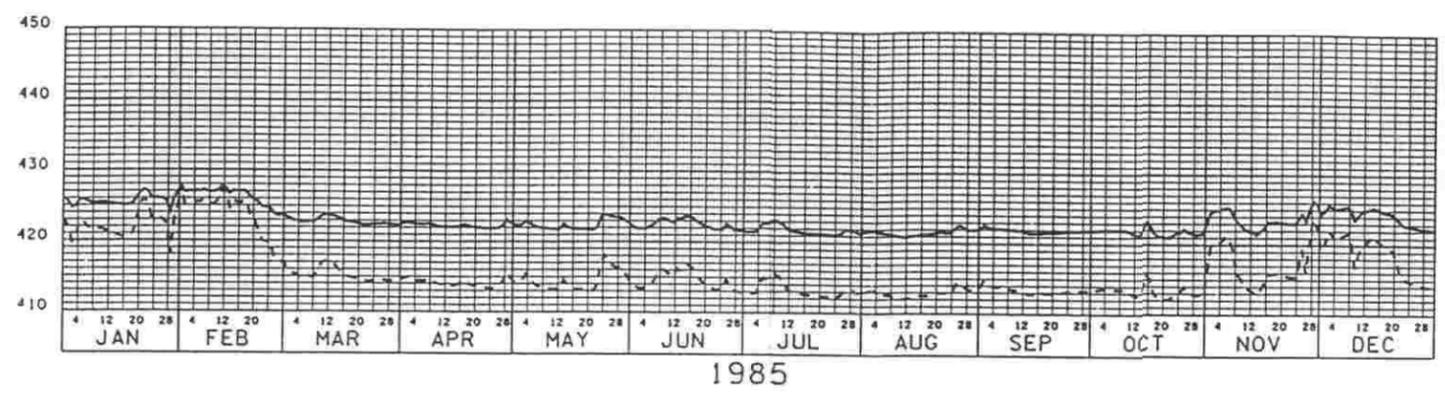

**LEGEND:**

- EXISTING CONDITION
- - - - - DAM REMOVED

Revisions			
Symbol	Descriptions	Date	Approved

U.S. ARMY ENGINEER DISTRICT  
CORPS OF ENGINEERS  
LOUISVILLE, KENTUCKY

Designed by:	 <b>GREEN RIVER BROWNSVILLE, KY</b>	
Drawn by:		
Checked by:		
Reviewed by:		
Approved by:	Scale:	Sheet Reference Number:
	Date:	
	Drawing Code:	Sheet _____ of _____

5

4

3

2

1




5

4


3

2


1

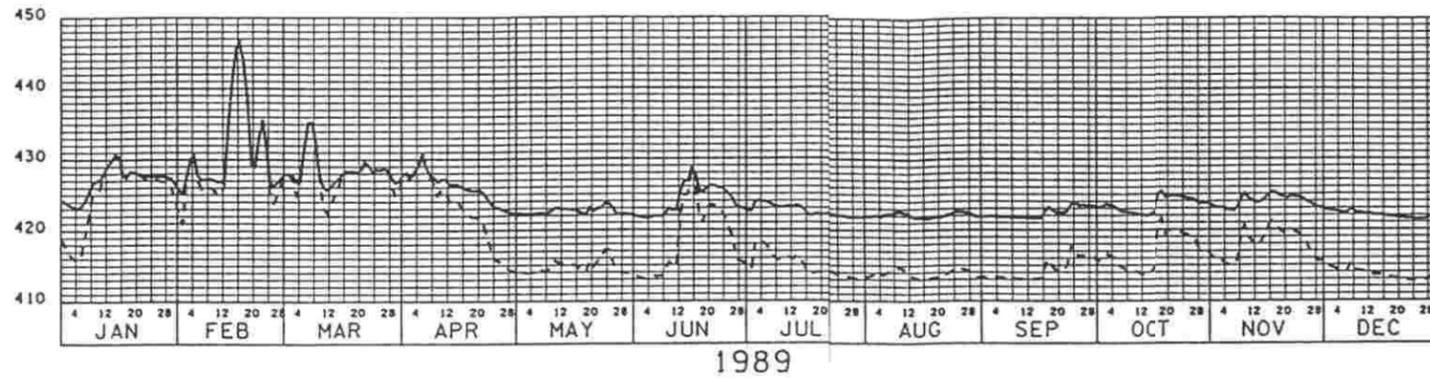

1989

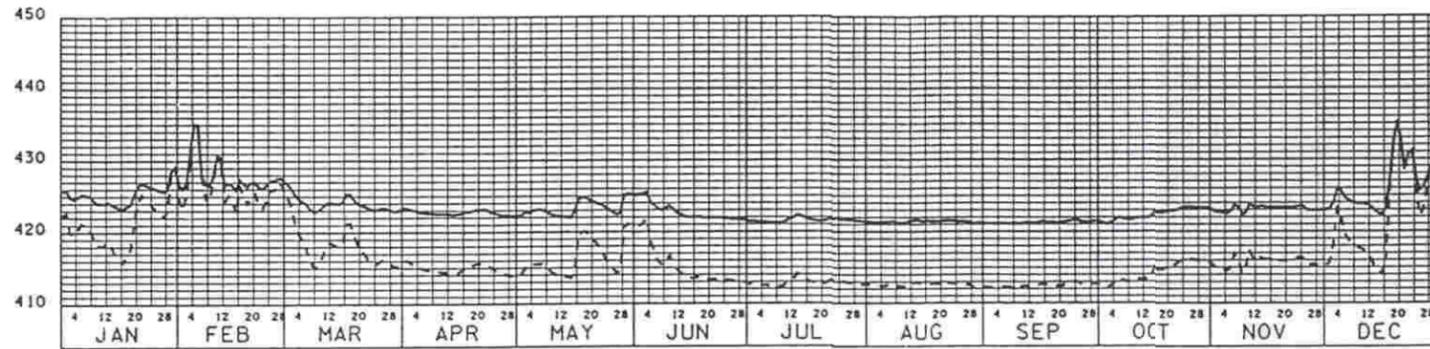

1990

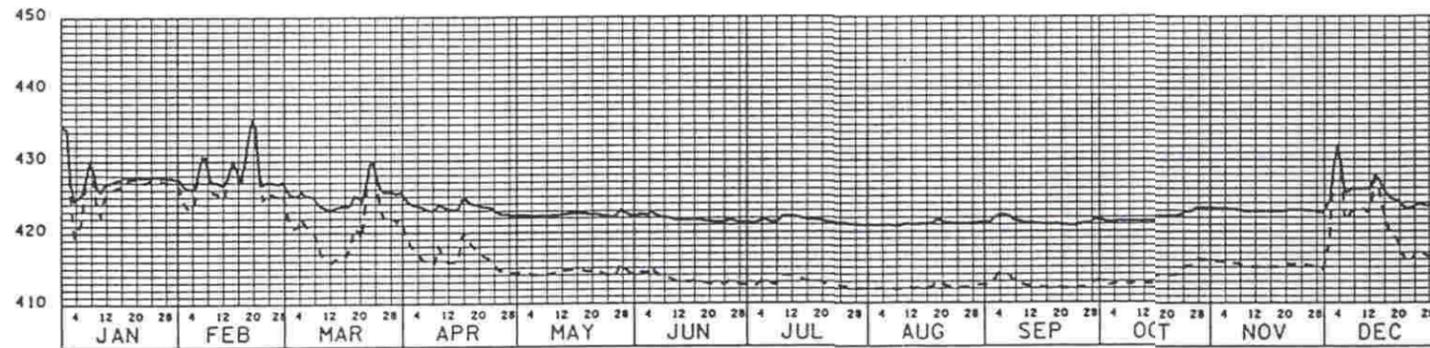

1991

**LEGEND:**

- EXISTING CONDITION
- - - - - DAM REMOVED

Revisions			
Symbol	Descriptions	Date	Approved

U.S. ARMY ENGINEER DISTRICT  
CORPS OF ENGINEERS  
LOUISVILLE, KENTUCKY

Designed by:	 <b>GREEN RIVER BROWNSVILLE, KY</b>	
Drawn by:		
Checked by:		
Reviewed by:	Scale:	Sheet Reference Number:
Approved by:	Date:	Sheet _____ of _____
	Drawing Codes:	





5

4

3

2

1

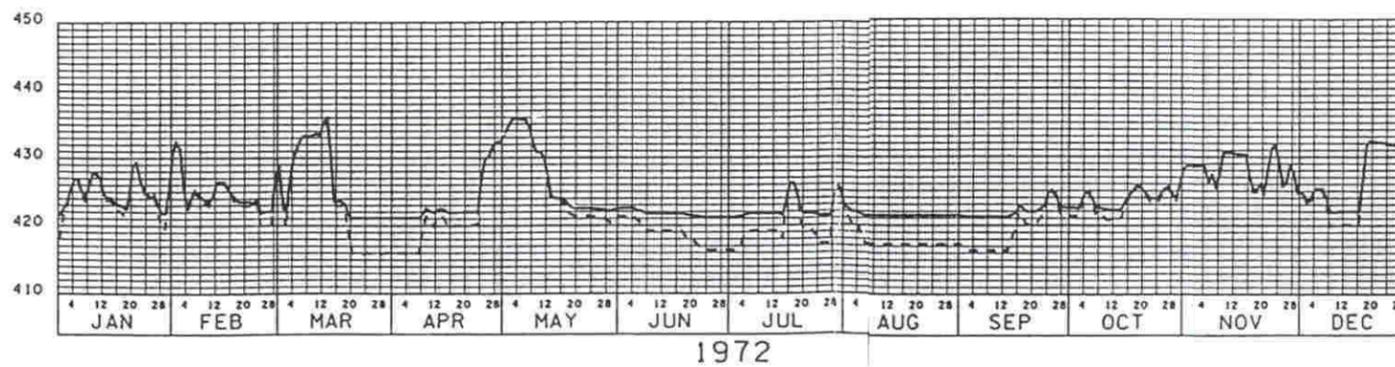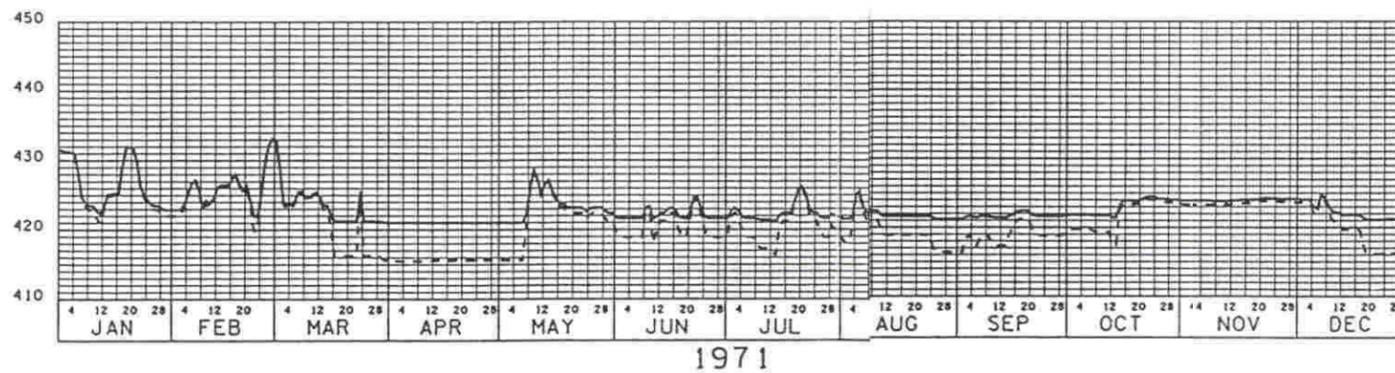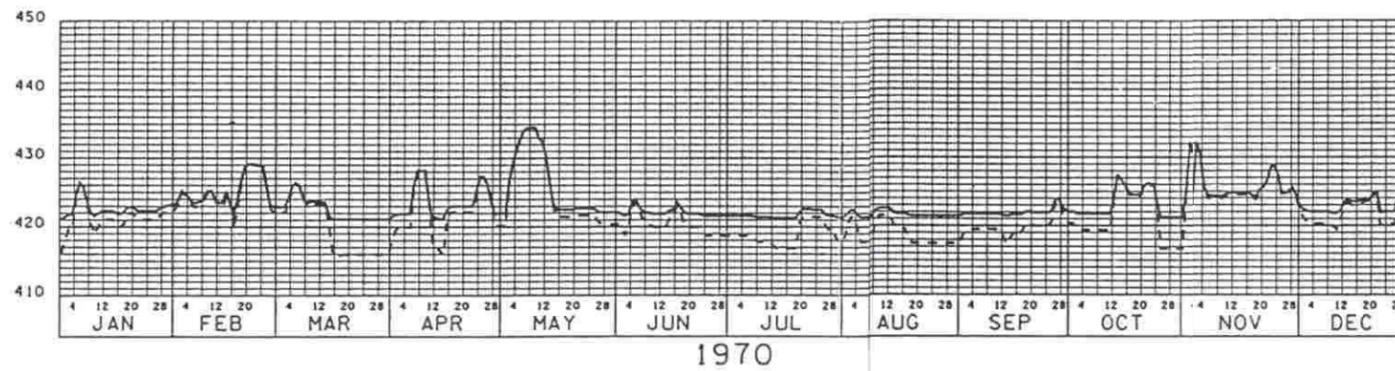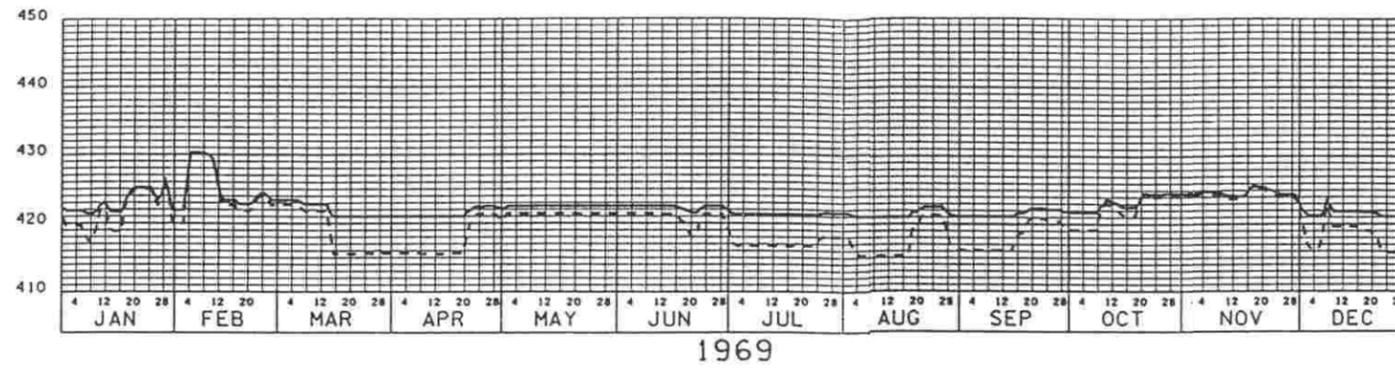





**LEGEND:**

- EXISTING CONDITION
- - - - - DAM REMOVED

Revisions			
Symbol	Descriptions	Date	Approved

U.S. ARMY ENGINEER DISTRICT  
CORPS OF ENGINEERS  
LOUISVILLE, KENTUCKY

Designed by:	 <b>NOLIN RIVER</b> <b>KYROCK, KY</b>	
Drawn by:		
Checked by:		
Reviewed by:		
Approved by:	Scale:	Sheet Reference Number:
	Date:	
	Drawing Code:	Sheet _____ of _____

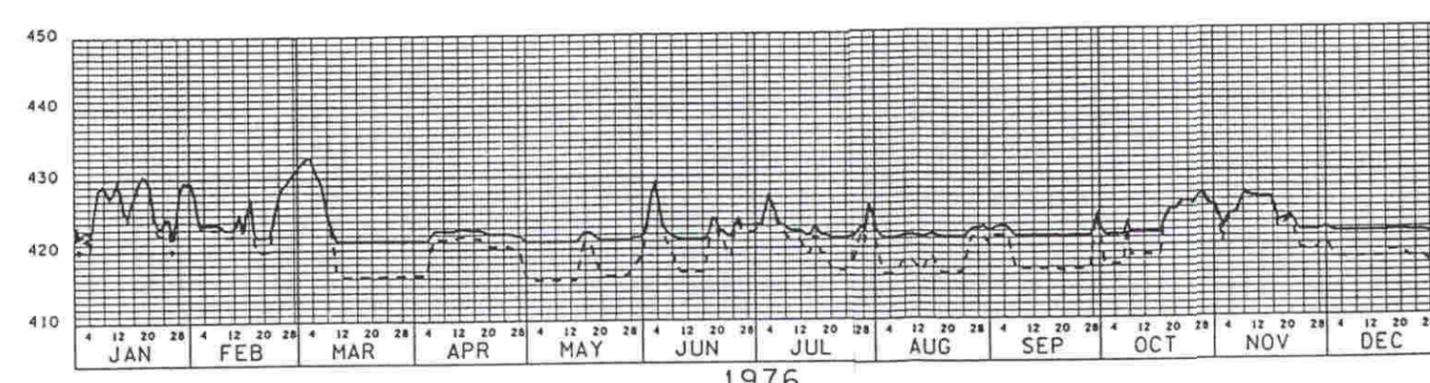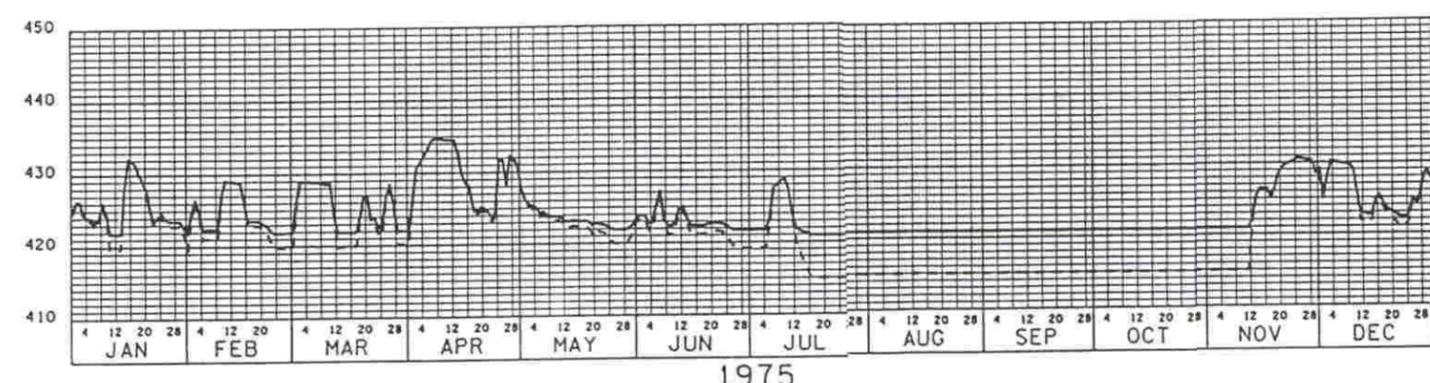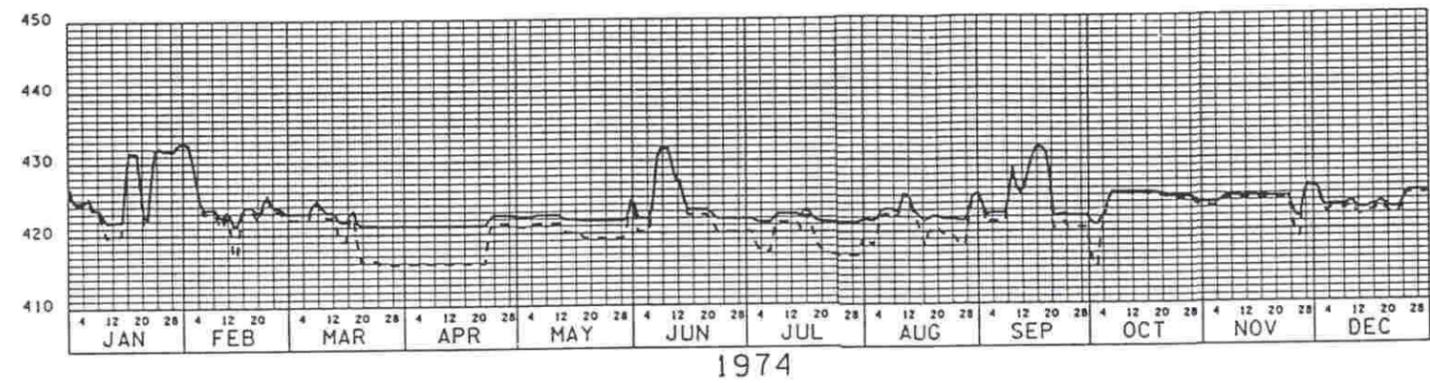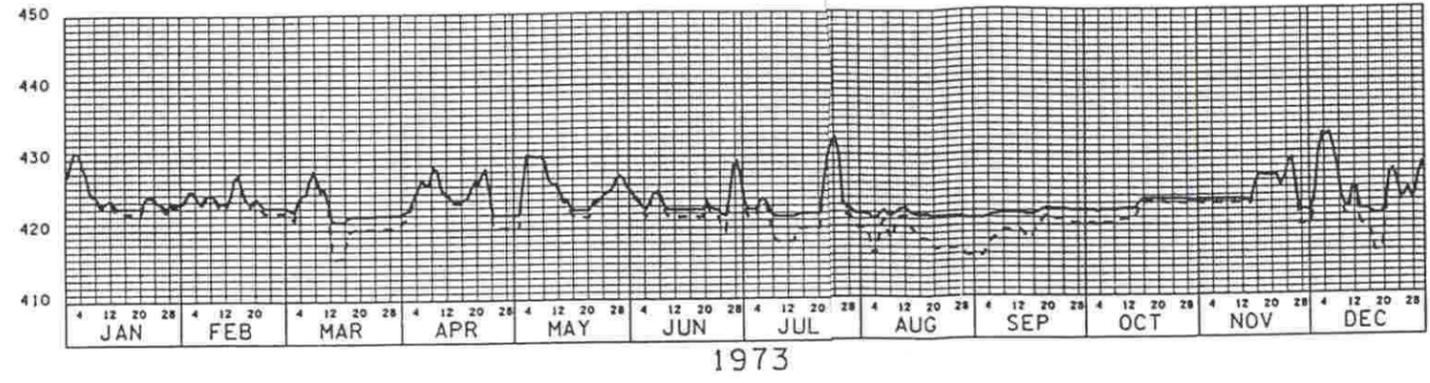

**LEGEND:**





————— EXISTING CONDITION

- - - - - DAM REMOVED

Revisions			
Symbol	Descriptions	Date	Approved

U.S. ARMY ENGINEER DISTRICT  
CORPS OF ENGINEERS  
LOUISVILLE, KENTUCKY

Designed by:	<b>NOLIN RIVER KYROCK, KY</b>	Scale:	Sheet Reference Number:
Drawn by:		Date:	
Checked by:		Drawing Code:	Sheet _____ of _____
Reviewed by:			
Approved by:			

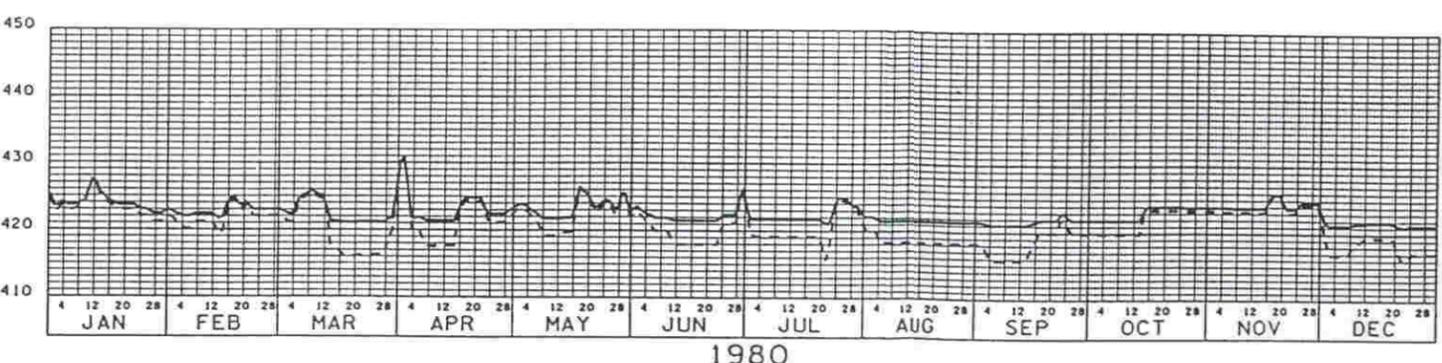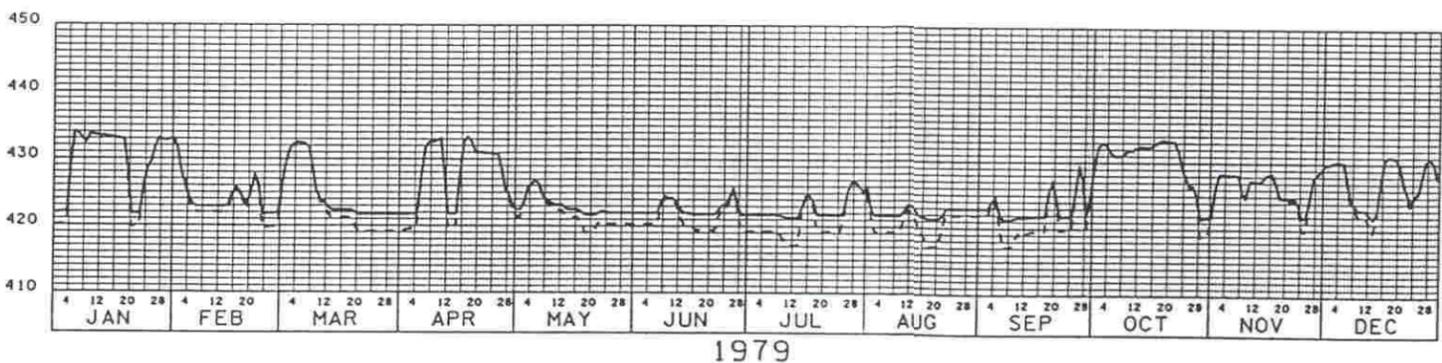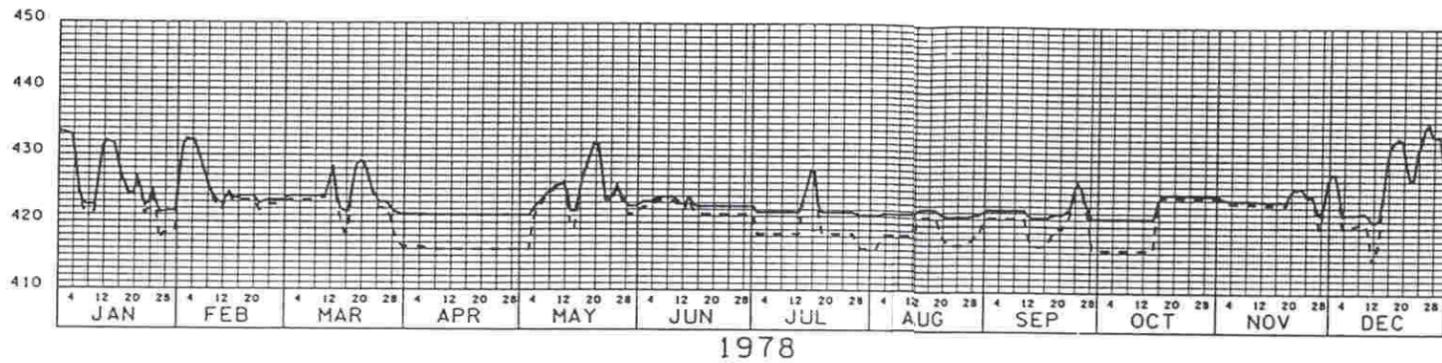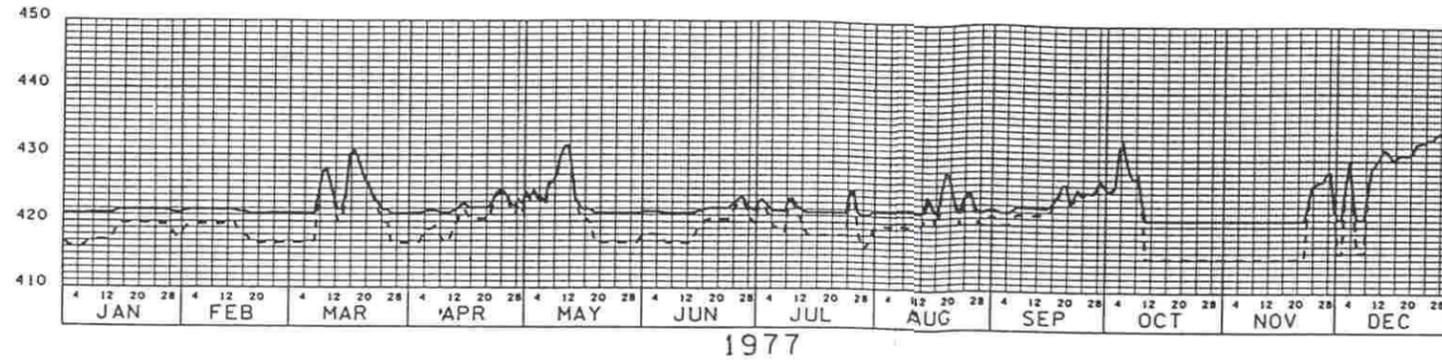

**LEGEND:**

- EXISTING CONDITION
- - - - - DAM REMOVED

Revisions			
Symbol	Descriptions	Date	Approved

U.S. ARMY ENGINEER DISTRICT  
CORPS OF ENGINEERS  
LOUISVILLE, KENTUCKY

Designed by:	 <b>NOLIN RIVER KYROCK, KY</b>									
Drawn by:										
Checked by:										
Reviewed by:										
Approved by:	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 30%;">Scale:</td> <td style="width: 30%;">Sheet Reference Number:</td> <td style="width: 40%;"> </td> </tr> <tr> <td>Date:</td> <td> </td> <td> </td> </tr> <tr> <td>Drawing Code:</td> <td> </td> <td>Sheet _____ of _____</td> </tr> </table>	Scale:	Sheet Reference Number:		Date:			Drawing Code:		Sheet _____ of _____
Scale:	Sheet Reference Number:									
Date:										
Drawing Code:		Sheet _____ of _____								

5


4

3


2

1


D

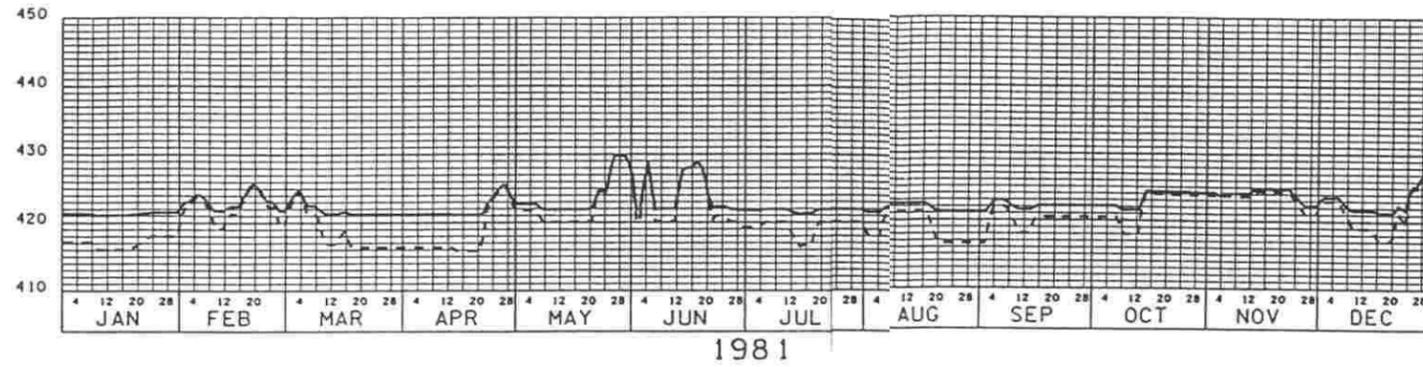


C

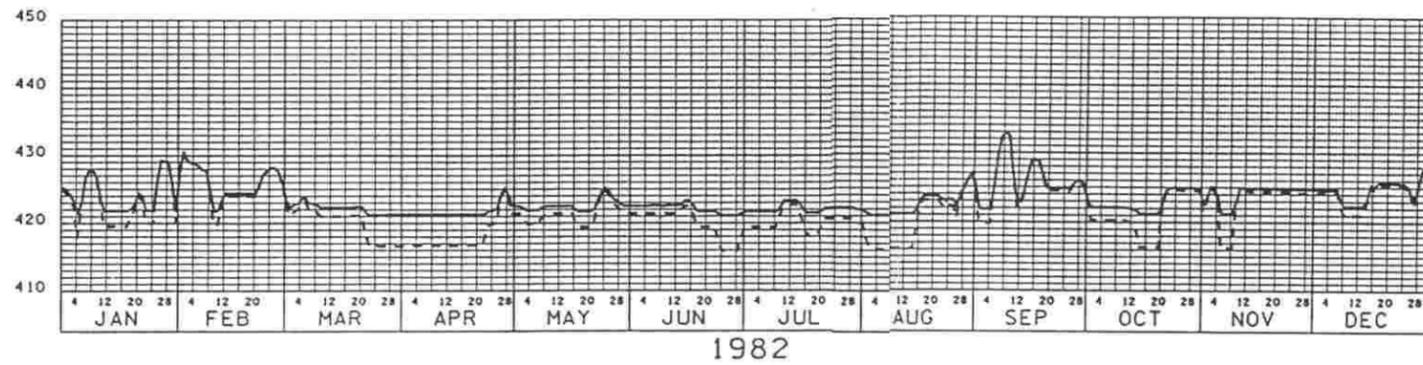

B

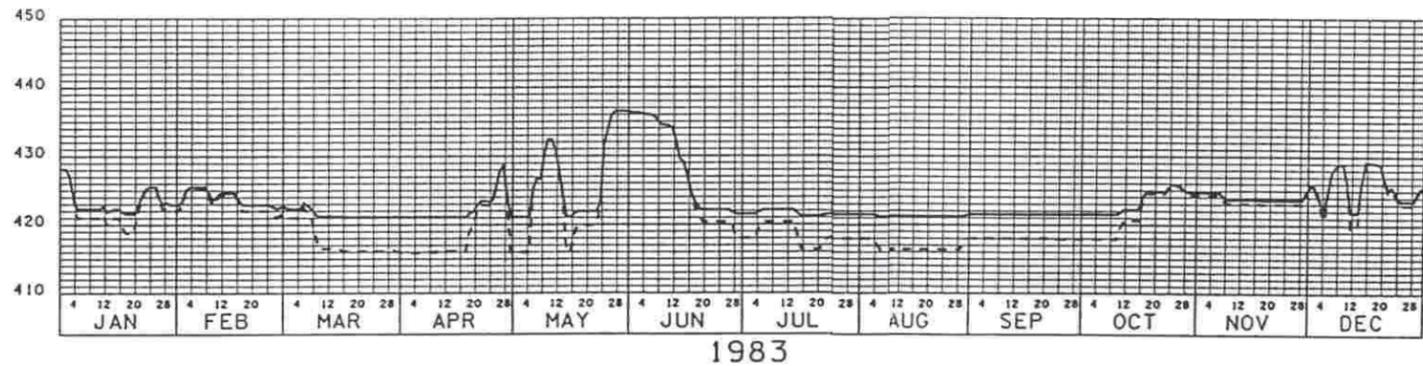

A

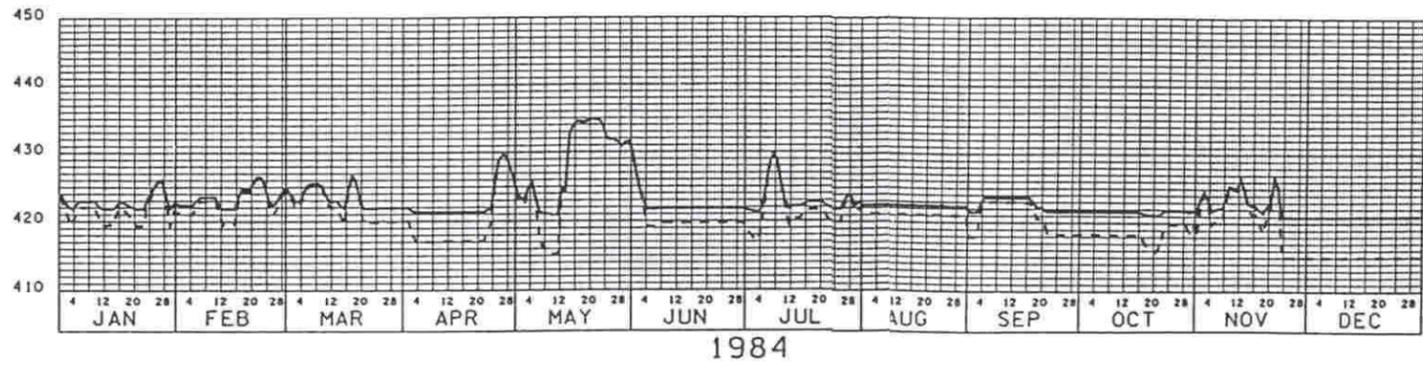

**LEGEND:**

- EXISTING CONDITION
- - - - - DAM REMOVED

Revisions			
Symbol	Descriptions	Date	Approved

U.S. ARMY ENGINEER DISTRICT  
CORPS OF ENGINEERS  
LOUISVILLE, KENTUCKY

Designed by:	<b>NOLIN RIVER KYROCK, KY</b>						
Drawn by:							
Checked by:							
Reviewed by:							
Approved by:	<table border="1"> <tr> <td>Scale:</td> <td>Sheet Reference Number:</td> </tr> <tr> <td>Date:</td> <td>Sheet _____ of _____</td> </tr> <tr> <td>Drawing Code:</td> <td> </td> </tr> </table>	Scale:	Sheet Reference Number:	Date:	Sheet _____ of _____	Drawing Code:	
Scale:	Sheet Reference Number:						
Date:	Sheet _____ of _____						
Drawing Code:							

5


4

3


2

1




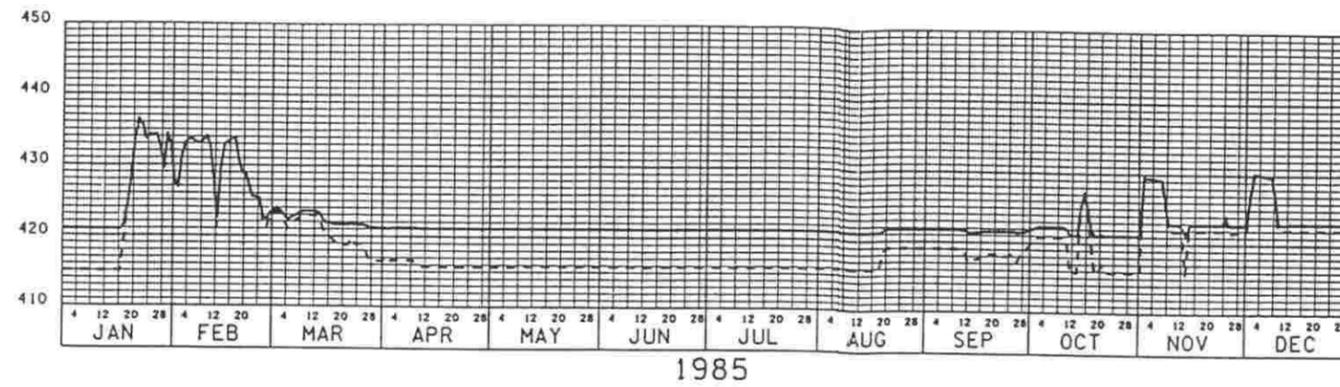


1985

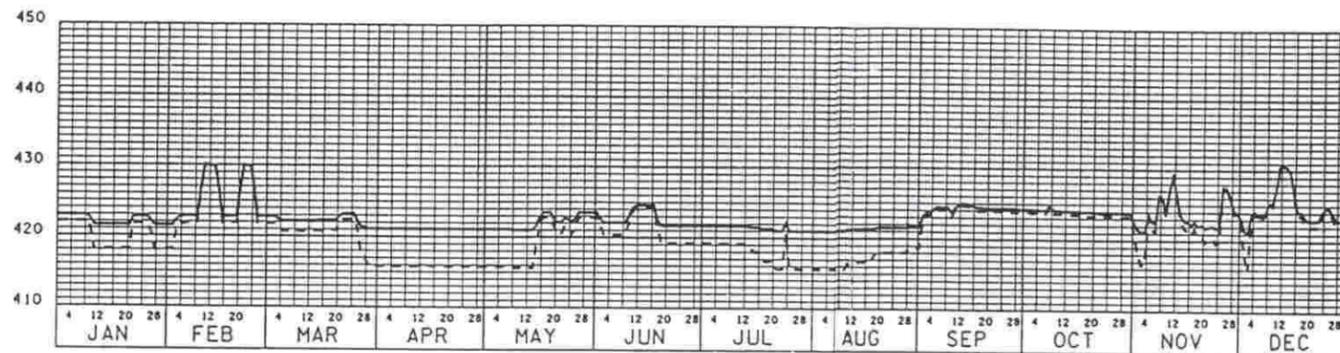

1986

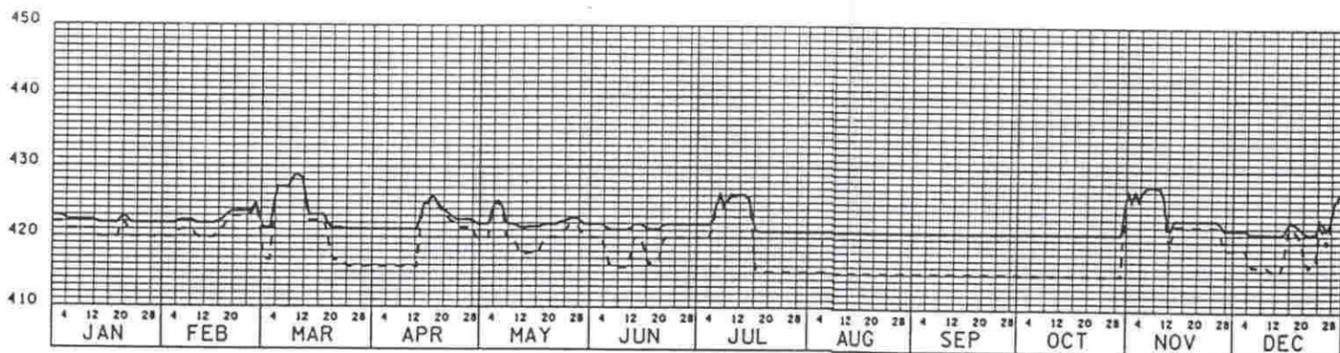

1987

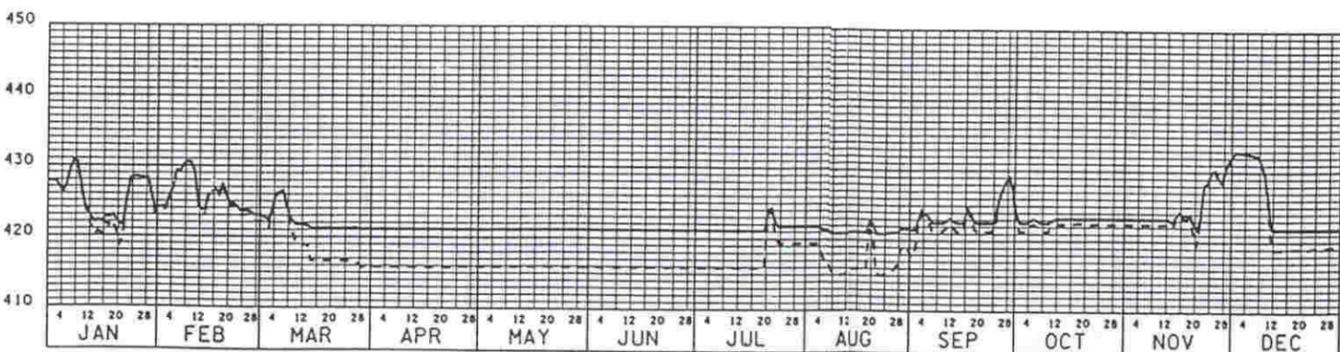

1988





**LEGEND:**

- EXISTING CONDITION
- - - - - DAM REMOVED

Revisions			
Symbol	Descriptions	Date	Approved

U.S. ARMY ENGINEER DISTRICT  
CORPS OF ENGINEERS  
LOUISVILLE, KENTUCKY

Designed by:	<b>NOLIN RIVER KYROCK, KY</b>
Drawn by:	
Checked by:	
Reviewed by:	Scale: _____ Date: _____
Approved by:	Sheet Reference Number: _____ Drawing Code: _____ Sheet _____ of _____

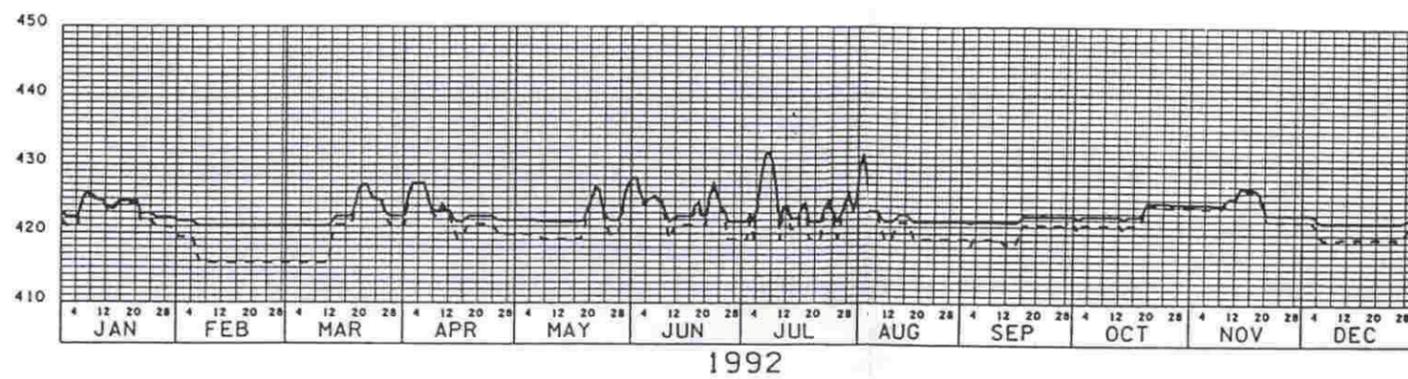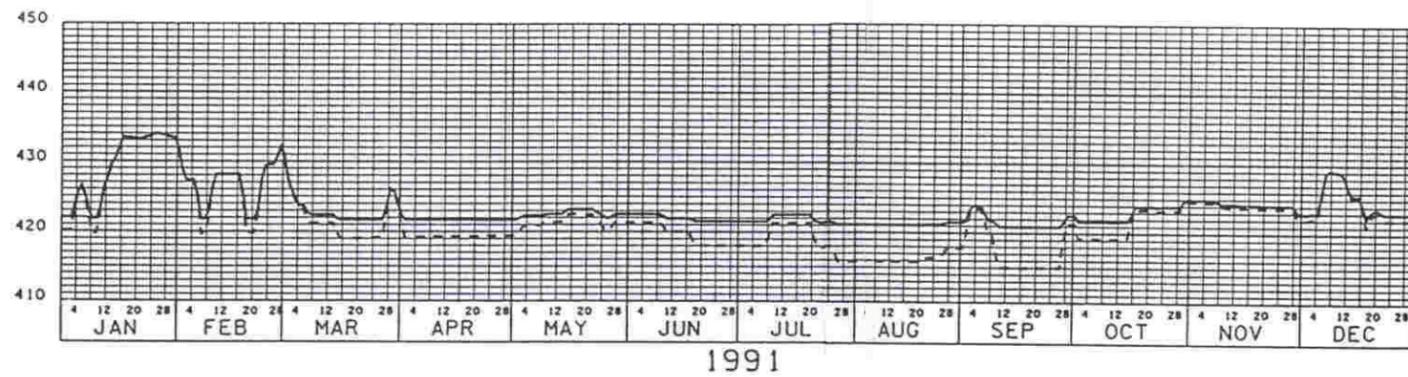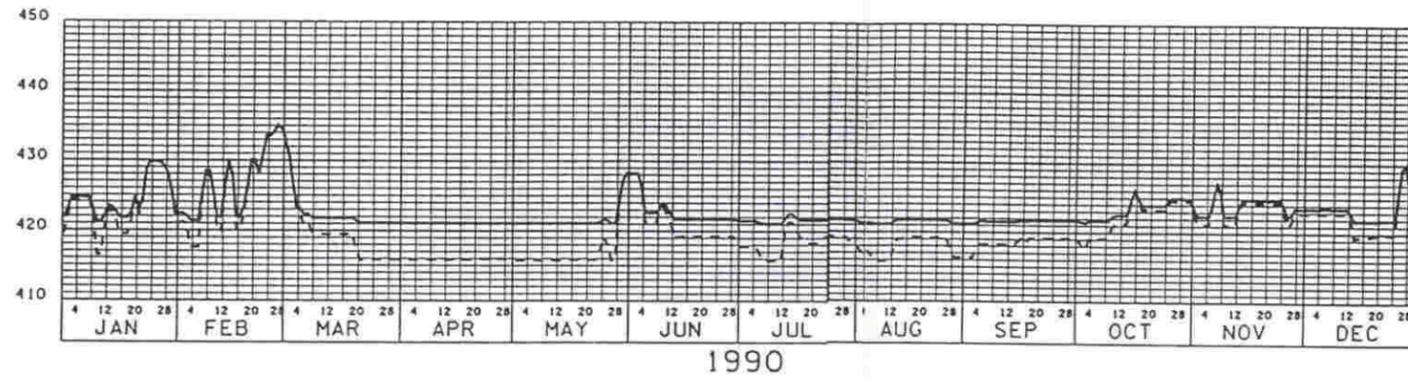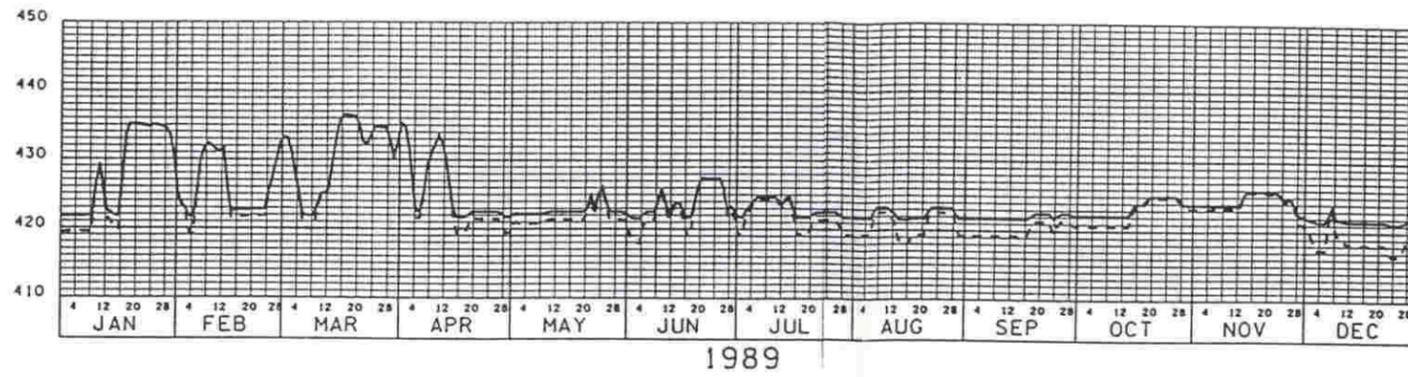


**LEGEND:**

- EXISTING CONDITION
- - - - - DAM REMOVED

Revisions			
Symbol	Descriptions	Date	Approved

U.S. ARMY ENGINEER DISTRICT  
CORPS OF ENGINEERS  
LOUISVILLE, KENTUCKY

Designed by:	 <b>NOLIN RIVER KYROCK, KY</b>	Sheet Reference Number:		
Drawn by:		Date:		
Checked by:		Drawing Code:	Sheet of	
Reviewed by:		Soles:		
Approved by:				

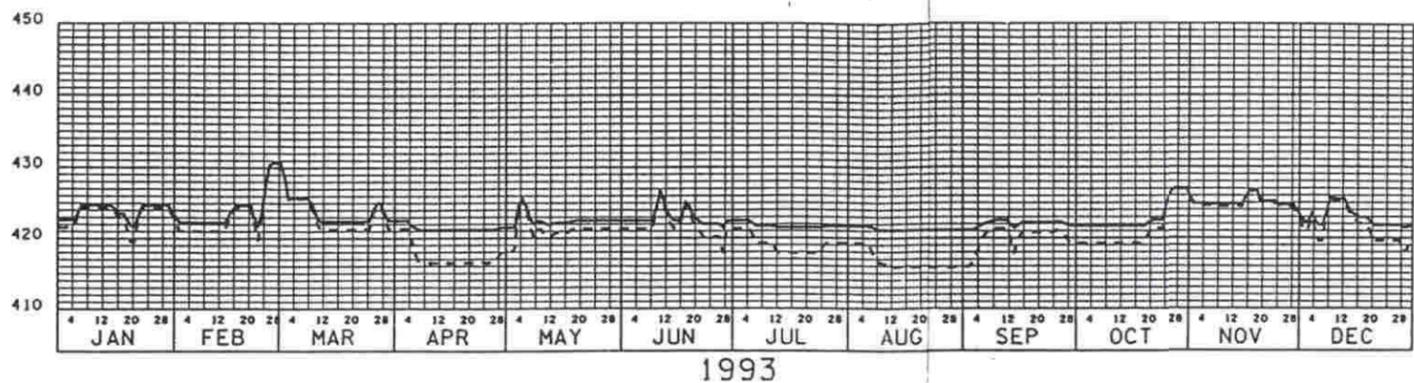

**LEGEND:**

- EXISTING CONDITION
- - - - - DAM REMOVED

Revisions			
Symbol	Descriptions	Date	Approved

U.S. ARMY ENGINEER DISTRICT  
 CORPS OF ENGINEERS  
 LOUISVILLE, KENTUCKY

Designed by:	 <b>NOLIN RIVER</b> <b>KYROCK, KY</b>	Scale:	Sheet Reference Number:	
Drawn by:		Date:		
Checked by:				
Reviewed by:				
Approved by:				